

F

F

E

E

D

D

C

C

B

B

A

A

## SPECIFICATIONS

- Voltage rating: 50V AC/DC;
- Current rating: 1A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 100MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max
- Material: Phosphor bronze, T=0.15MM
- Q' TY: 100000PCS/Bag

13790510059

5

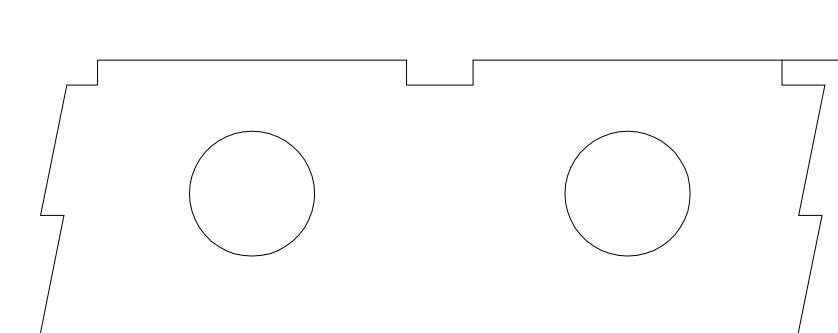
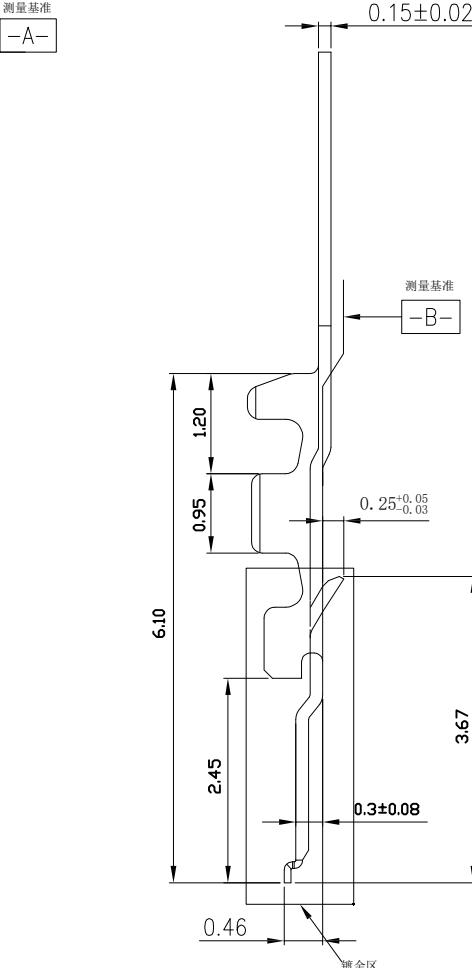


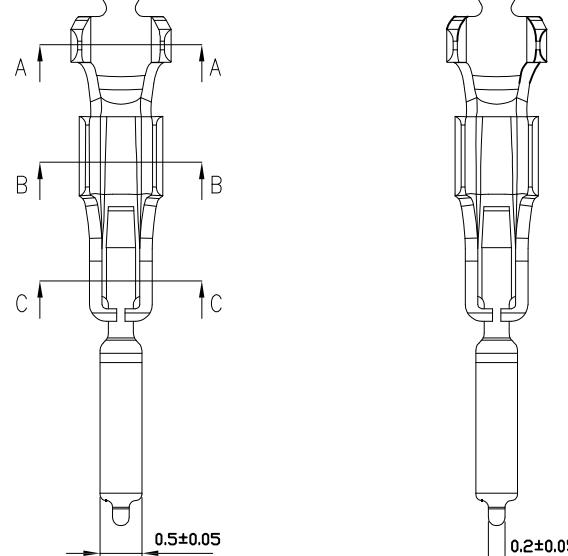
4

3

2

1

XR

测量基准  
-A-

0.15±0.02

测量基准  
-B-

EST1008 T B X -1G X- X

引脚代码+间距  
T示意端子 X普通脚 H高脚 E增高型脚  
X普通 L长 S短 U超薄  
X公端 G母端 C示意90° S示意180°

P磷铜 B黄铜 E合金铜  
0素材 2镀锡先冲后镀  
3镀锡先冲后冲 4镀全镍  
4.2镀全镍先冲后镀  
5G、15G示意镀金5U°或15U°, 1G示意镀金1U°



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

				料号 PART NO: EST1008TBX-1GX-X				一般公差 GENERAL TOLERANCE X.X ±0.30 X.XX ±0.20 ANGLE ±1°
				品名 TITLE: 1008-T				
				材料: C5191	单位: MM	包装规格: 10K/卷	比例: 1:1	
	版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图: 审核: 核准: 日期:			2022.07.14