

13790510059




5

4

3

2

1

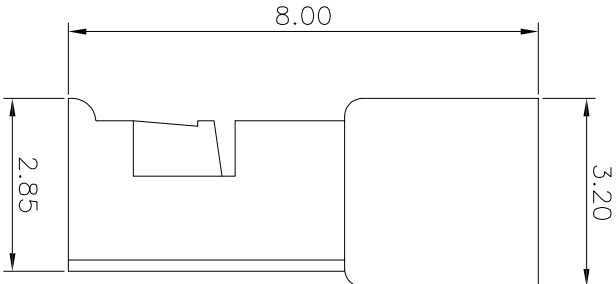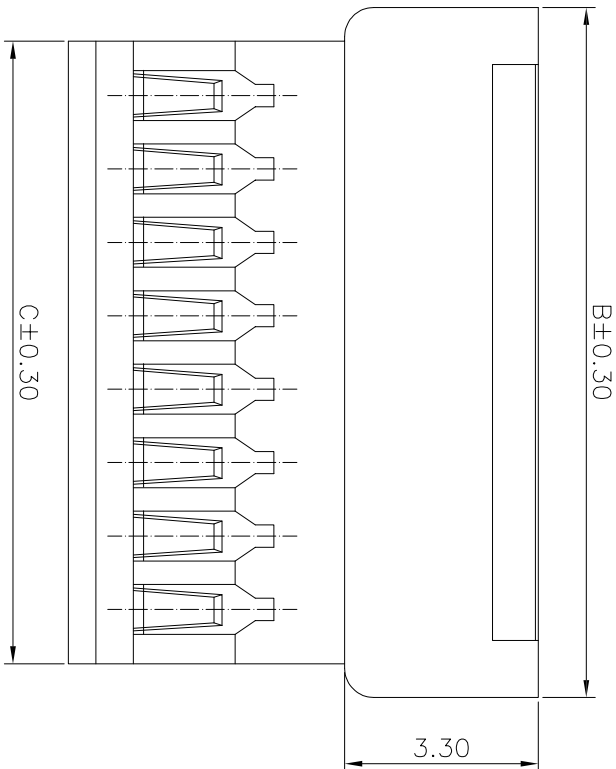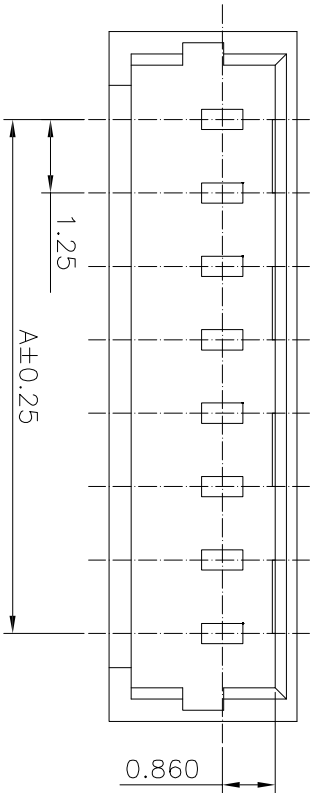

Part No	A	B	C
2	1.25	4.40	3.10
3	2.50	5.65	4.35
4	3.75	6.90	5.60
5	5.00	8.15	6.85
6	6.25	9.60	8.10
7	7.50	10.65	9.35
8	8.75	11.90	10.60
9	10.00	13.15	11.85
10	11.25	14.40	13.10
11	12.50	15.65	14.35
12	13.75	16.90	15.60
13	15.00	18.15	16.85
14	16.25	19.40	18.10
15	17.50	20.65	19.35
16	18.75	21.90	20.60

Circuits: 2~16

EST1250 H - 1*NP X - X - X - HF-NK - X

羿通代码+间距

PIN数

1示意单排
2示意双排

X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

X普通
B带扣
C侧破

X公胶壳
G母胶壳

NO MARK

A灼热丝750
B灼热丝850
X普通料

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

2示意两侧带锁扣

U超薄防呆型

HV带高凸点
LC带低凸点
K卡槽
E有耳
NE无耳

HF示意无卤
NF普通含卤

SPECIFICATIONS

- Voltage rating:125V AC/DC;
- Current rating:1A AC/DC;
- Withstanding Voltage:250V AC/minute
- Insulation resistance:100MΩ Min
- Temperature range:~40℃~+85℃
- Contact resistance:20mΩ Max
- Conductor size:AWG28~#32



东莞市羿通实业有限公司
DONGGUAN EASTON ELECTRONIC Co., Ltd.

料号PART NO: EST1250H-1*NPX-X-G

品名 TITLE: MX1.25-H(母)

材料:

单位:

MM

包装规格:

比例:

1:1

一般公差
X.X ±0.30
X.XX ±0.25
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制 图	审 核	日期: 2022.4.14

6

5

4

3

2

1

KR