
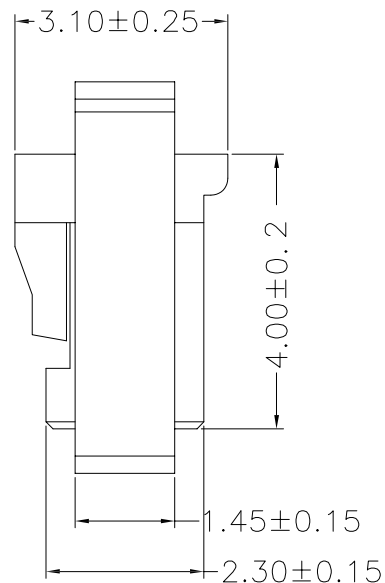


POLES	DIMENSION (mm)		
	A	B	C
4	3.75	5.50	10.00
6	6.25	8.00	12.50
7	7.50	9.25	13.75
8	8.75	10.50	15.00
10	11.25	13.00	17.50
2	13.75	15.50	20.00

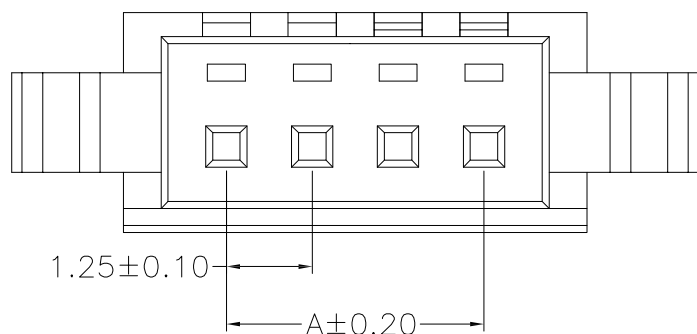

- Voltage rating: 125V AC/DC
- Current rating: 2A AC/DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000M Ω Min.
- Temperature range: -25° C - +85° C
- Contact resistance: 20m Ω Max.

- Part No.:
- Poles:4,6,7,8,10,12
- Material:Nylon 66 UL 94V-0
- Q'ty:1,000PCS/Bag

EST1251	H	- 1*NP	X	- B	- X	- HF-NK	- X
↑	↑	↑	↑	↑	↑	↑	↑
异通代码+ 间距			X本色 B黑色 R红色 L蓝色 Y黄色 G绿色 C透明	X普通 B带扣 C刺破 2L 示意两侧带锁扣 U超防呆型 HV带高凸点 LC带低凸点 K卡槽 E有耳 NE无耳	X胶壳 G母胶壳	NO MARK	A灼热线750 B灼热线850 X普通料
		PIN数				HF示意无齿 NF普通含齿	
		1示意单排 2示意双排					
	H示意胶壳, H后无数字默认材质V0 H后带数字2示意材质V2						



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

				料号PART NO:EST1251H-1*NPX-X				一般公差 GENERAL TOLERANCE X.X ±0.30 X.XX ±0.25 X.XX ±0.10 ANGLE ±1°
				品名 TITLE: 1251-H				
				材料: C5191	单位: MM	包装规格:	比例: 1:1	
日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图:	审核:	核准:	日期: 2023.7.26	