

13790510059

5

4

3

2

1

 $B \pm 0.20$ $C \pm 0.30$

1.00

 $D \pm 0.2$

EST1255 H - 1*NP X - U - NK - HF-X


↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑

↑ 昇通代码+间距 ↑ PIN数 ↑ X本色 B普通 NO MARK ↑ X公胶壳 G母胶壳



1示意单排 2示意双排 X黑色 C刺破 L示意LOCK TYPE HF示意无卤 NF普通含卤

H示意胶壳, H后无数字默认材质V0 H后带数字2示意材质V2 Y黄色 F防呆型 HV带高凸点 LC带低凸点, K卡槽 E有耳 NE无耳

pin	Dimensions			
	A	B	C	D
02P	1.25	2.72	5.72	
03P	2.50	3.97	6.97	
04P	3.75	5.22	8.22	2.50
05P	5.00	6.47	9.47	3.75
06P	6.25	7.72	10.72	5.00
07P	7.50	8.97	11.97	6.25
08P	8.75	10.22	13.22	7.50
09P	10.00	11.47	14.47	8.75
10P	11.25	12.72	15.72	10.00
11P	12.50	13.97	16.97	11.25
12P	13.75	15.22	18.22	12.50
13P	15.00	16.47	19.47	13.75
14P	16.25	17.72	20.72	15.00
15P	17.50	18.97	21.97	16.25
16P	18.75	20.22	23.22	17.50
17P	20.00	21.47	24.47	18.75
18P	21.25	22.72	25.72	20.00
19P	22.50	23.97	26.97	21.25
20P	23.75	25.22	28.22	22.50

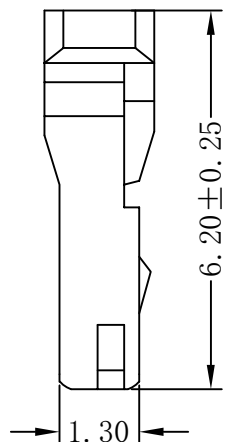

A-----A

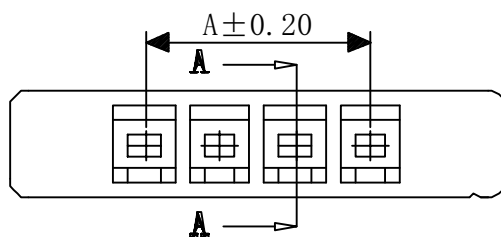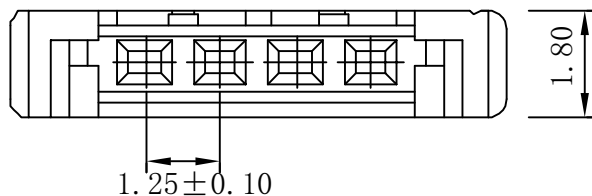

Main Specifications

Poles: 02 ~ 20

Contact resistance: $\leq 20\text{m}\Omega$ Insulation resistance: $\geq 100\text{M}\Omega$

Rated voltage): 125V AC DC

Rated current): 1.0A AC DC

Withstand Voltage): 500V AC/minute

Temperature Range): $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 

东莞市昇通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1255H-1*NPX-U

品名 TITLE: 51146-H (不带扣)

材料: PA66

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2023.9.12

一般公差
GENERAL TOLERANCE
X.X ± 0.25
X.XX ± 0.20
ANGLE $\pm 1^{\circ}$

日期版次
REVISION日期
DATE变更内容
DESCRIPTION核 准
APPROVALBY

6

5

4

3

2

1

ZL