

13790510059

5

4

3

2

1

F

E

D

C

B

A

F




E

D




C

B

A

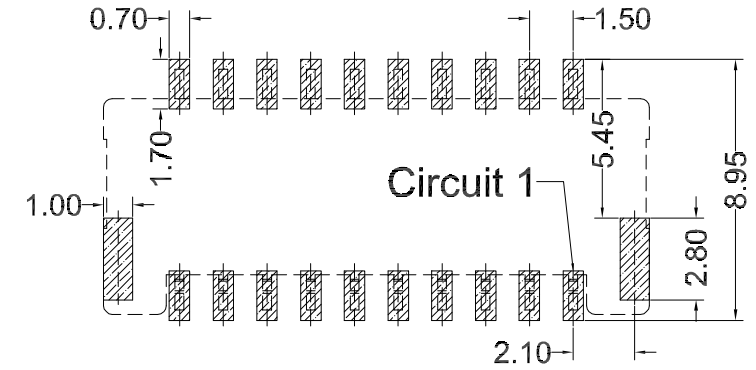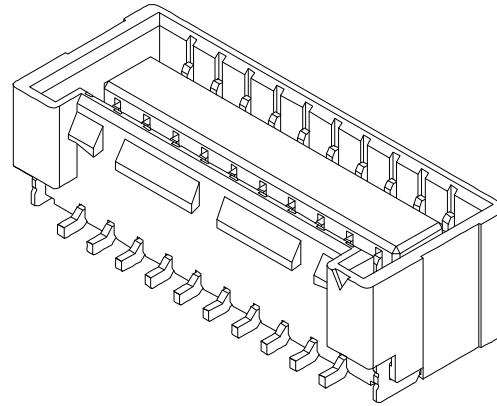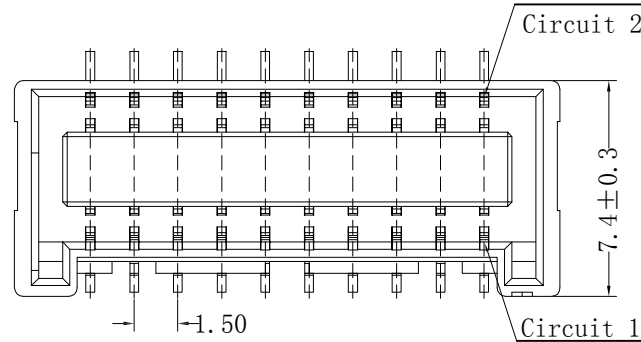

Recommended P.C.B Layout
General Tolerance±0.05

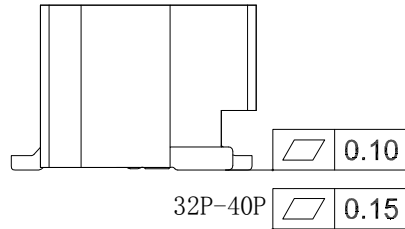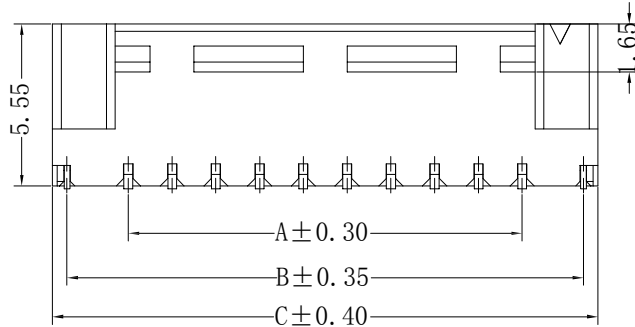

CSG PART NO.	Dimension mm		
	A	B	C
2*5	6.00	10.20	11.20
2*6	7.50	11.70	12.70
2*7	9.00	13.20	14.20
2*8	10.50	14.70	15.70
2*9	12.00	16.20	17.20
2*10	13.50	17.70	18.70
2*11	15.00	19.20	20.20
2*12	16.50	20.70	21.70
2*13	18.00	22.20	23.20
2*14	19.50	23.70	24.70
2*15	21.00	25.20	26.20
2*16	22.50	26.70	27.70
2*17	24.00	28.20	29.20
2*18	25.50	29.70	30.70
2*19	27.00	31.20	32.20
2*20	28.50	32.70	33.70

EST1502 W VS- 1*NP X - X - X X - NK-HF

↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑

↑ 1单排 2双排

↑ PIN数

↑ X本色 B黑色 R红色 L蓝色 Y黄色 G绿色

↑ X普通 B带扣 U超薄 PH组合排针 FH组合排母 H高弯 K打脚 D防呆型 2示意有柱 LO带定位无K KLO带定位打K

↑ V示意180°直针, VS立式 R示意90°弯针, RS卧式 RG高弯

↑ W示意针座 W后无0默认材质为V0 W后带2示意V2

↑ G为PIN针镀金 S为PIN针镀锡

↑ 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66

↑ NK为NO MARK MK为有MARK

↑ HF无卤 NF普通含卤

SPECION

- Current rating: 2A AC, DC (AWG #24)
- Voltage rating: 100V AC, DC
- Temperature range: -25°C to +85°C
- Contact resistance: Initial value/30mΩ max.After environmental testing /60mΩ max.
- Insulation resistance: 500M Ω min.
- Withstanding voltage: 500V AC/minute
- Applicable wire: Conductor size/AWG #28 to #24
- Insulation O.D./0.8 to 1.2mm

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1502WVS-2*NPX-X

品名 TITLE: ZP1502立贴

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2024. 6. 1

一般公差
GENERAL TOLERANCE

X. X ±0.30

X. XX ±0.20

ANGLE ±1°



YIL

13790510059




5

4




3

2


1

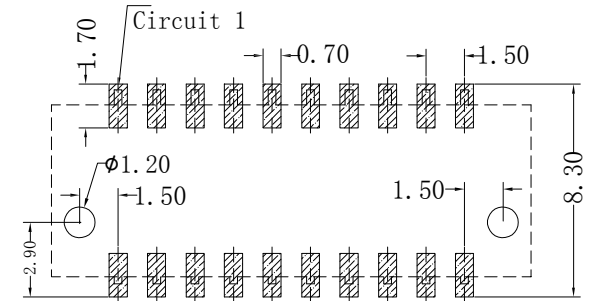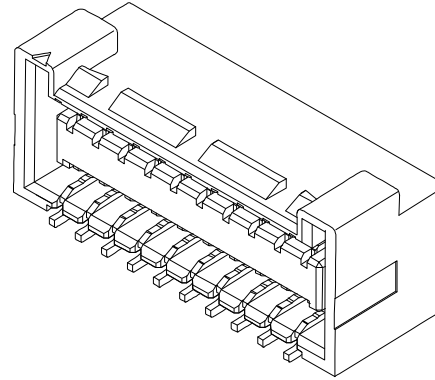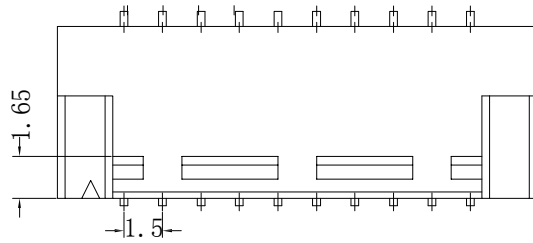

Recommended P.C.B Layout
General Tolerance ± 0.05

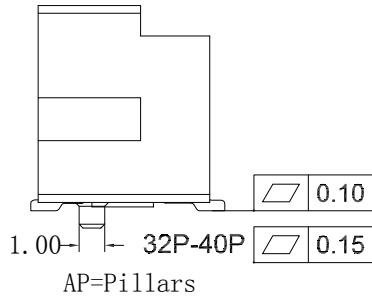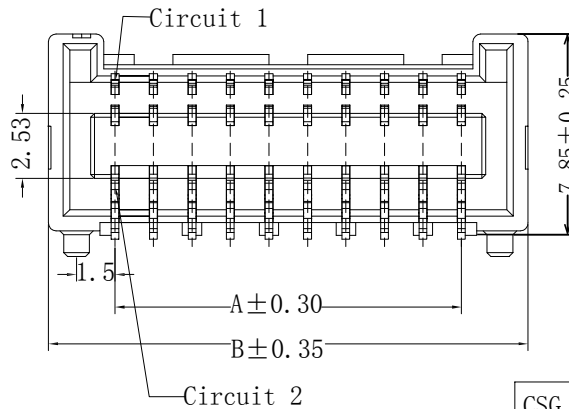

AP=Pillars



AA=NO Special

CSG PART NO.	Dimension mm	
	A	B
2*5	6.00	11.20
2*6	7.50	12.70
2*7	9.00	14.20
2*8	10.50	15.70
2*9	12.00	17.20
2*10	13.50	18.70
2*11	15.00	20.20
2*12	16.50	21.70
2*13	18.00	23.20
2*14	19.50	24.70
2*15	21.00	26.20
2*16	22.50	27.70
2*17	24.00	29.20
2*18	25.50	30.70
2*19	27.00	32.20
2*20	28.50	33.70

EST1502 W V - 1*NP X - X - X X - NK-HF

↑ 羿通代码+间距

↑ PIN数

↑ X本色
B黑色
R红色
L蓝色
Y黄色
G绿色

↑ X普通
B带扣
U超薄
PH组合排针
FH组合排母
H高弯
K打脚K
D防呆型
2示意有柱
LO带定位无K
KLO带定位打K

↑ G为PIN针镀金
S为PIN针镀锡

↑ 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66

↑ NK为NO MARK
MK为有MARK

↑ HF无卤
NF普通含卤

W示意针座
W后无0默认材质为V0
W后带2示意V2

SPECION

- Current rating: 2A AC, DC (AWG #24)
- Voltage rating: 100V AC, DC
- Temperature range: -25°C to +85°C
- Contact resistance: Initial value/30mΩ max.After environmental testing /60mΩ max.
- Insulation resistance: 500M Ω min.
- Withstanding voltage: 500V AC/minute
- Applicable wire: Conductor size/AWG #28 to #24
- Insulation O.D./0.8 to 1.2mm



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1502WRS-2*NPX-X

品名 TITLE: ZP1502卧贴

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2024. 6. 1


版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

一般公差
GENERAL TOLERANCE

X. X ±0.30

X. XX ±0.20

ANGLE ±1°



YIL