

13790510059






5

4

3

2

1

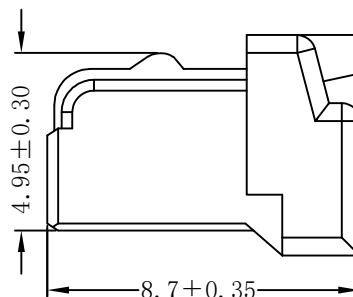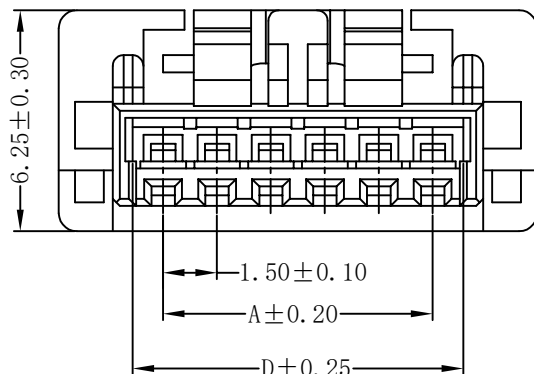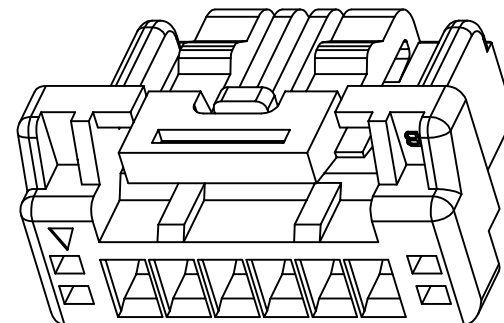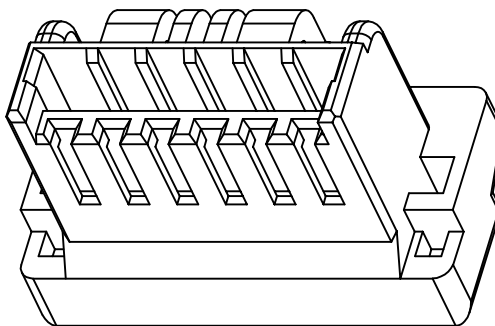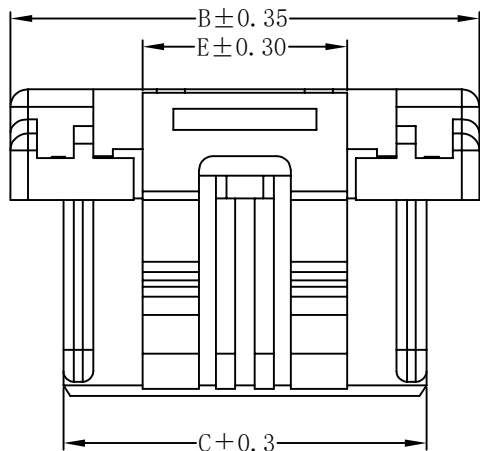

EST1504 H - 1*NP X - B - X

↑ ↑ ↑ ↑ ↑ ↑

羿通代码+间距 PIN数 X本色 X公胶壳
1示意单排 2示意双排 B黑色 B带扣 G母胶壳
H示意胶壳, L蓝色 Y黄色 C透明
H后无数字默认材质V0 H后带数字2示意材质V2

Poles	DIM (mm)				
	A	B	C	D	E
1*2	1.50	7.30	4.30	3.20	1.20
1*3	3.00	8.80	5.80	4.70	2.20
1*4	4.50	10.30	7.30	6.20	
1*5	6.00	11.80	8.80	7.70	2.90
1*6	7.50	13.30	10.30	9.20	5.80
1*7	9.00	14.80	11.80	10.70	5.70
1*8	10.50	16.30	13.30	12.20	6.90
1*9	12.00	17.80	14.80	13.70	
1*10	13.50	19.30	16.30	15.20	8.60
1*11	15.00	20.80	17.80	16.70	
1*12	16.50	22.30	19.30	18.20	
1*13	18.00	23.80	20.80	19.70	10.60
1*14	19.50	25.30	22.30	21.20	
1*15	21.00	26.80	23.80	22.70	

■ SPECIFICATIONS

- Material: PBT, UL94V-0;
- Color: Natural(White);
- Current Rating: 2A AC,DC
- Voltage Rating: 100V AC,DC
- Temperature range:-40℃~+85℃
- Contact resistance:20mΩ Max
- Material:PBT
- After environmental testing:40 mΩ Max



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1504H-1*NPX-B-X

品名 TITLE: 1504-H

材料:

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期: 2022. 4. 20

一般公差
GENERAL TOLERANCE
X. X ±0.25
X. XX ±0.20
ANGLE ±1°

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



XR