

13790510059






5

由Autodesk教育版产品制作

3

2

1

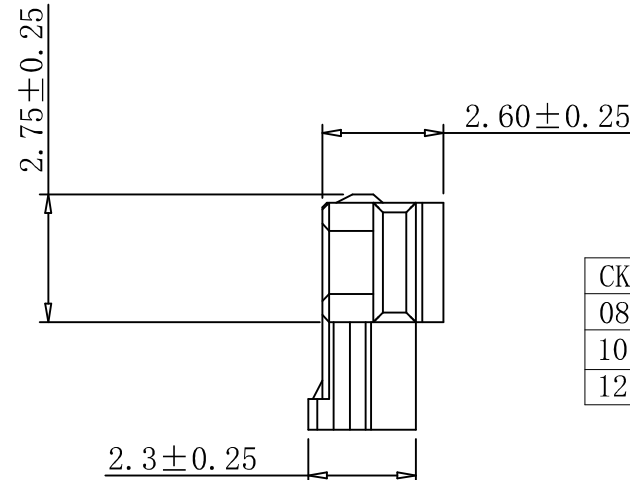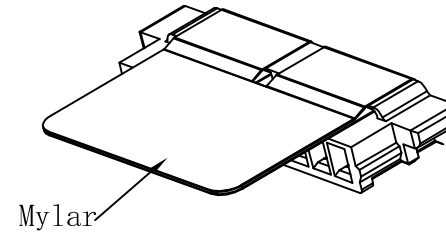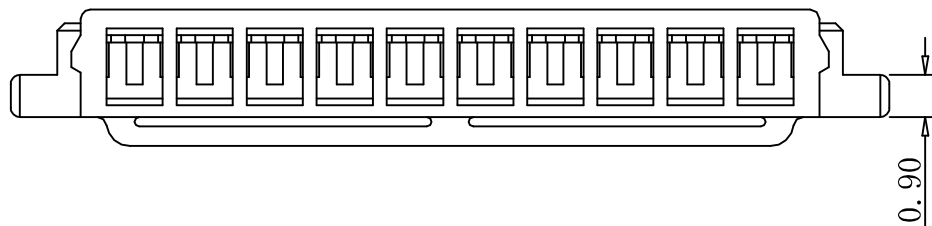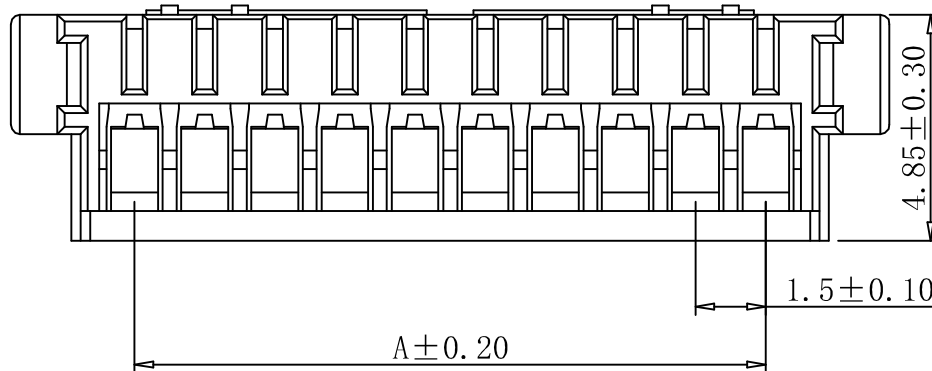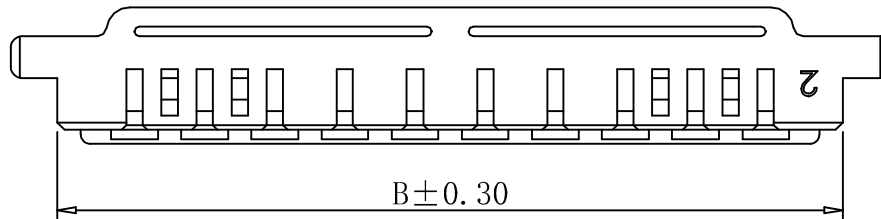

CKT	A	B
08	10.50	13.80
10	13.50	16.80
12	16.50	19.80

EST1506 H - 1*NP X - B - X

↑ 羿通代码+间距 ↑ 1示意单排 2示意双排 ↑ PIN数 ↑ X本色 B黑色 R红色 L蓝色 Y黄色 G绿色 ↑ X普通 B带扣 C刺破 L示意LOCK TYPE U超薄F防呆型 HV带高凸点 LC带低凸点, K卡槽 E有耳 NE无耳

H示意胶壳, H后无数字默认材质V0 H后带数字2示意材质V2

SPECIFICATIONS

- Current rating: 2.5A AC, DC;
- Voltage rating: 300V AC, DC
- Temperature range: -25°C to +85°C
- Contact resistance: $\leq 40m\Omega$
- Insulation resistance: $\geq 500M\Omega$
- Withstand voltage: 500V AC/minute
- Material: PA66
- Qty: 1000PCS/Bag

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1506H-1*NPX-X

品名 TITLE: 1506-H

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2025. 11. 24

一般公差
GENERAL TOLERANCE
X. X ± 0.30
X. XX ± 0.25
ANGLE $\pm 1^\circ$



XES

5

由Autodesk教育版产品制作

3

2

1