

F

E

由Autodesk教育版产品制作

B

A



F

E



由Autodesk教育版产品制作

B




A

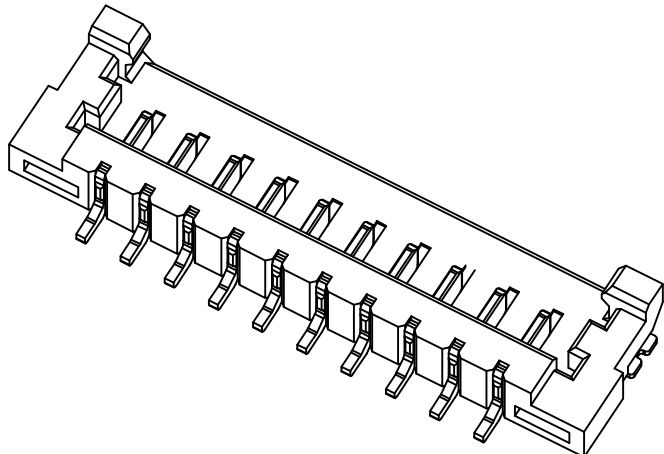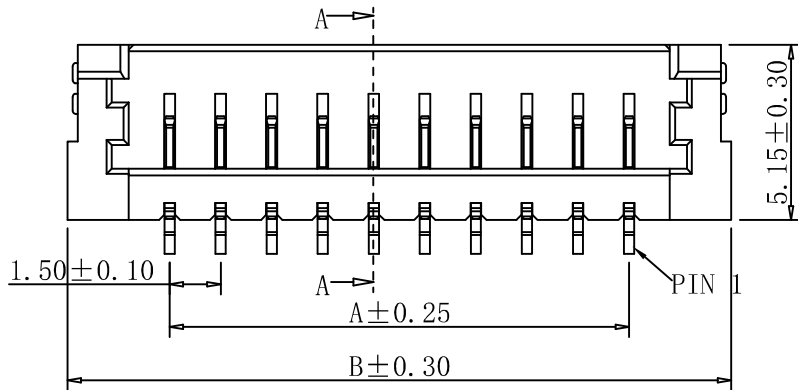

CKT.	A	B	C
2-6	(N-1)*1.5	A+6.0	A+5.7
6	7.50	13.50	13.20
8	10.50	16.50	16.20
10	13.50	19.50	19.20
12	16.50	22.50	22.20
N	(N-1)*1.5	A+6.0	A+5.7

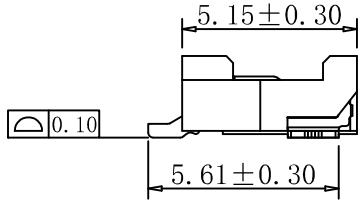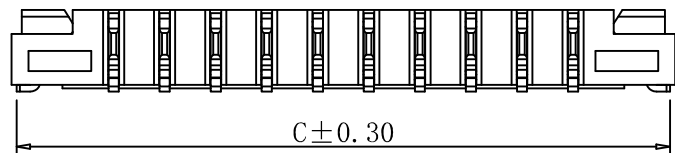

4	CAP	1	THERMOPLASTIC UL94-V0
3	TAB	2	COPPER ALLOY
2	TERMINAL	XX	COPPER ALLOY
1	HOUSING	1	THERMOPLASTIC UL94-V0
NO	DESCRIPTION	Q' ty	MATERIAL

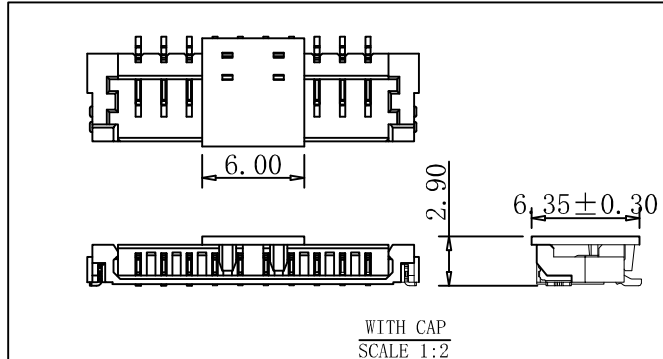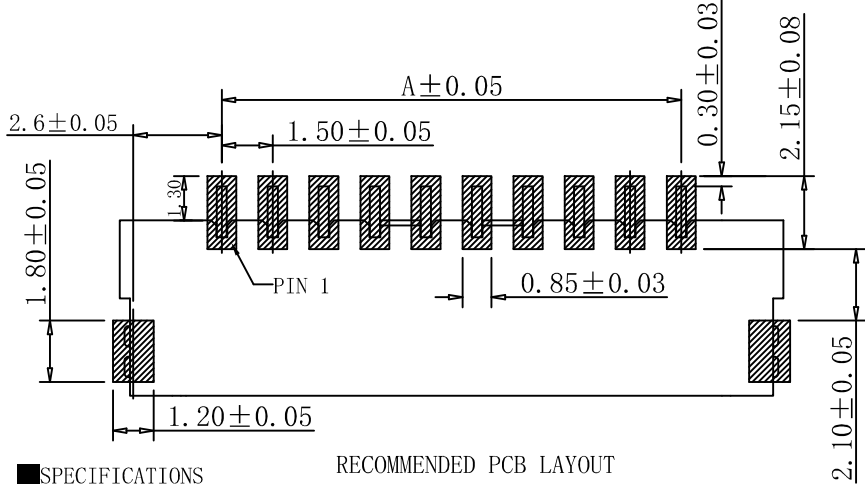

- SPECIFICATIONS

- Current rating:2.5A AC,DC;
 - Voltage rating:300V AC, DC
 - Temperature range:-25℃ to +85℃
 - Contact resistance:≦40mΩ
 - Insulation resistance:≧500MΩ
 - Withstand voltage: 500V AC/minute
 - Q' ty:***PCS/Reel
- RECOMMENDED PCB LAYOUT
- TOLERANCE+0.05

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1506WRS-1*NPX-X

品名 TITLE: 1506-WAFER卧贴

材料: 单位: MM 包装规格: 比例: 1:1

制图: 审核: 核准: 日期: 2025. 11. 24

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°