

13790510059

5

4

3

2

1

F

E

D

C

B

A

F




E

D

C

B

A

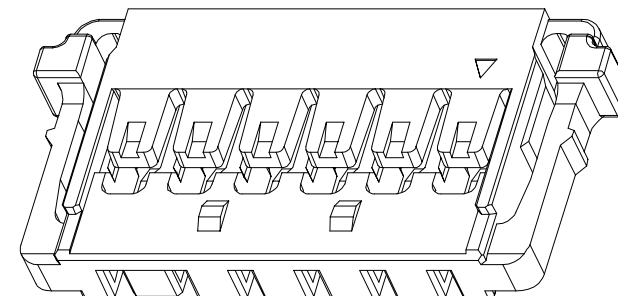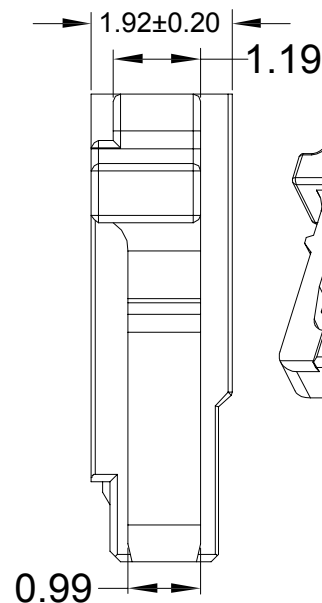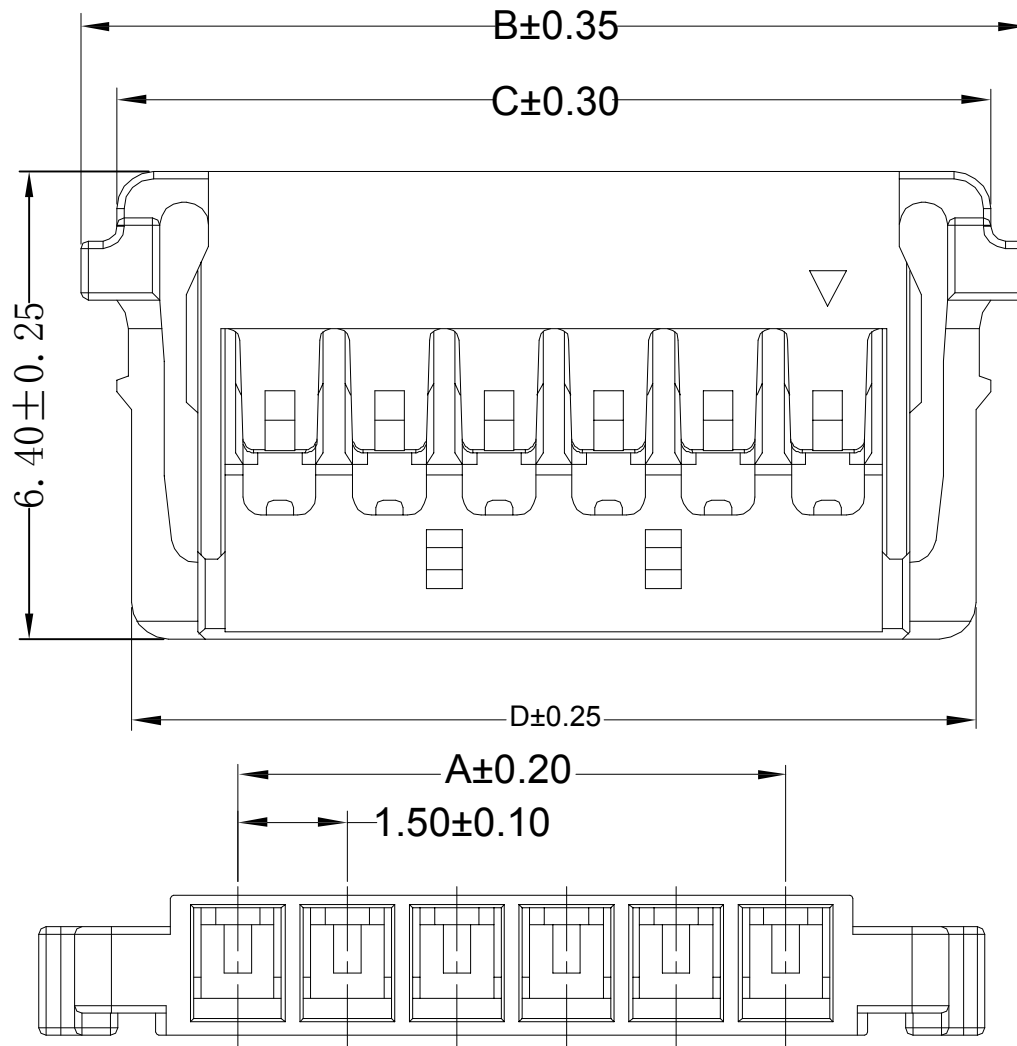

Poles	Dimensions(mm)			
	A	B	C	D
02	1.50	6.95	5.95	5.55
03	3.00	8.45	7.45	7.05
04	4.50	9.95	8.95	8.55
05	6.00	11.45	10.45	10.05
06	7.50	12.95	11.95	11.55
07	9.00	14.45	13.45	13.05
08	10.50	15.95	14.95	14.55
09	12.00	17.45	16.45	16.05
10	13.50	18.95	17.95	17.55
11	15.00	20.45	19.45	19.05
12	16.50	21.95	20.95	20.55

Specifications :

- Voltage rating: 150V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 20m\Omega$
- After environmental testing: $\leq 40m\Omega$



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1507H-1*NPX-X

品名 TITLE: 1507-H

材料:

单位:

MM

包装规格:

比例:

1:1

制图:

审核:


核准:

日期:

2024. 06. 27

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVALBY

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°



XES

13790510059

5

4

3

2

1

 5.30 ± 0.25

0.15

 1.8 ± 0.30 1.80 ± 0.30 0.12 ± 0.08 SECTION: A-A
SCALE: 1:1SECTION: B-B
SCALE: 1:1

1.15

 5.60 ± 0.30 2.70 ± 0.25

■ Specifications :

- Voltage rating: 150V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 20m\Omega$
- After environmental testing: $\leq 40m\Omega$

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1507TPX-2X-G

品名 TITLE: 1507-T

材料:

单位: MM

包装规格:


比例: 1:1

制图:

审核:

核准:

日期: 2024. 6. 27

一般公差
GENERAL TOLERANCE
X.X ± 0.30
X.XX ± 0.25
ANGLE $\pm 1^\circ$ 版次
REVISION日期
DATE变更内容
DESCRIPTION核准
APPROVALBY

XES