

13790510059


5

4





3

2


1

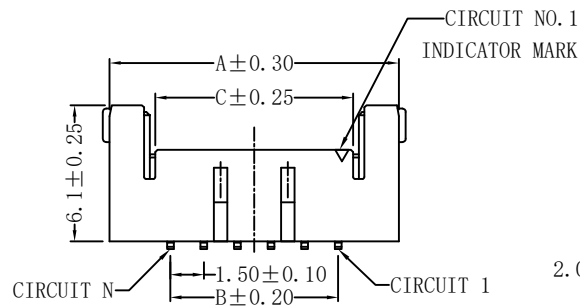


SEC. A-A




NUMBER of LOCK




2-4 CIRCUITS



5 CIRCUITS



6-12 CIRCUITS

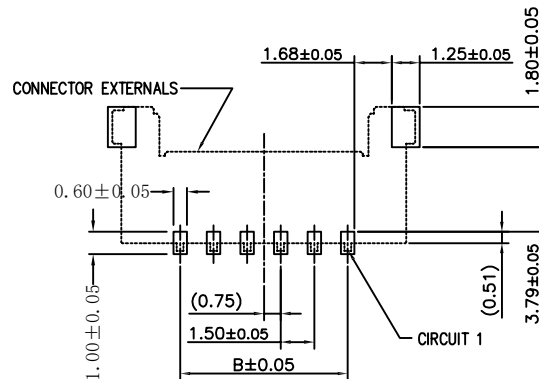

RECOMMENDED PATTERN LAYOUT (REF.)

RECOMMEND STFNCL MASK THICKNESS: 0.1mm, APERTURE RATIO: 100%.

Poles	A	B	C
1*02	6.95	1.50	2.85
1*03	8.45	3.00	4.35
1*04	9.95	4.50	5.85
1*05	11.45	6.00	7.35
1*06	12.95	7.50	8.85
1*07	14.45	9.00	10.35
1*08	15.95	10.50	11.85
1*09	17.45	12.00	13.35
1*10	18.95	13.50	14.85
1*11	20.45	15.00	16.35
1*12	21.95	16.50	17.85

Specifications:

- Voltage rating: 150V AC/DC
 - Current rating: 3A AC/DC
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: 1000 $\geq$ M Ω
 - Contact resistance: $\leq$ 30M Ω
 - After environmental testing: $\leq$ 40M Ω
 - Sheel: high temperature UL94-V0 Black
- Pin: Copper alloy



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1507WRS-1*NPX-X

品名 TITLE: 1507卧贴

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2025. 7. 5

一般公差
GENERAL TOLERANCE
X.X $\pm$ 0.30
X.XX $\pm$ 0.25
ANGLE $\pm$ 1°

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVALBY

6

5

4

3

2

1

XES