

13790510059






5

4


3

2


1

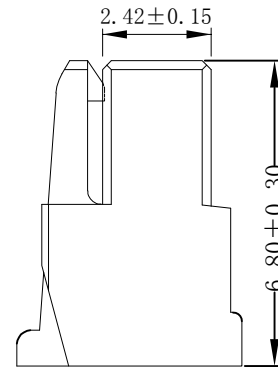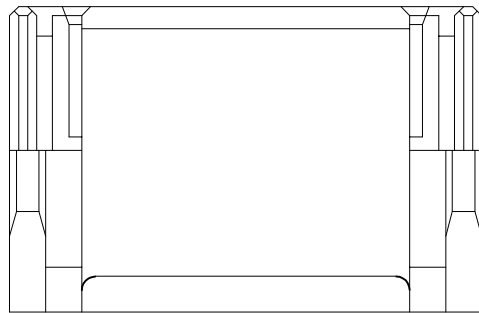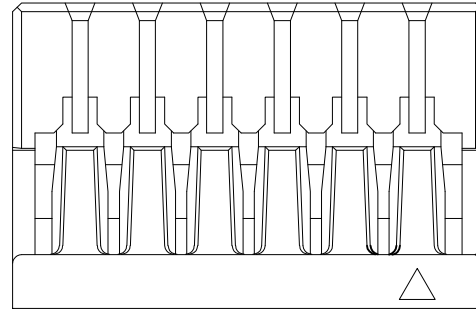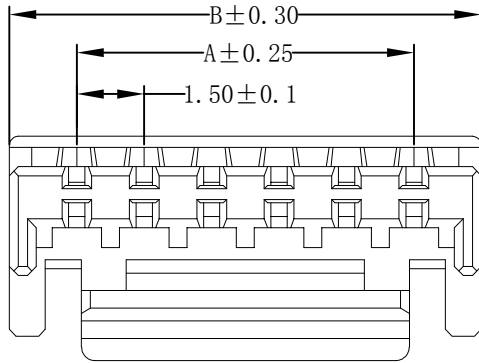

2P-4P样式



5P-7P样式



8P-15P样式

Poles	DIM.A	DIM.B
2P	1.5	4.5
3P	3.0	6.0
4P	4.5	7.5
5P	6.0	9.0
6P	7.5	10.5
7P	9.0	12.0
8P	10.5	13.5
9P	12.0	15.0
10P	13.5	16.5
11P	15.0	18.0
12P	16.5	19.5
13P	18.0	21.0
14P	19.5	22.5
15P	21.0	24.0

■ SPECIFICATIONS

- ◆ Applicable Wire: AWG.#30~#24
- ◆ Voltage rating : 100V DC/AC
- ◆ Current rating: 2A (AWG.#24)
- ◆ Withstand voltage: 500V AC/min.
- ◆ Working Temp : -25°C ~ +105°C
- ◆ Insulation resistance: $\geq 500 \text{ M}\Omega$
- ◆ Contact resistance: $\leq 20 \text{ m}\Omega$

■ MATERIAL

- ◆ Housing: PA66, UL94-V0



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1510H-1*NPX-X

品名 TITLE: 1510-H

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2024. 9. 11

一般公差
GENERAL TOLERANCE
X. X ± 0.30
X. XX ± 0.20
ANGLE $\pm 1^\circ$

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

6

5

4

3

2

1

JD