

13790510059



5

4





3

2

1

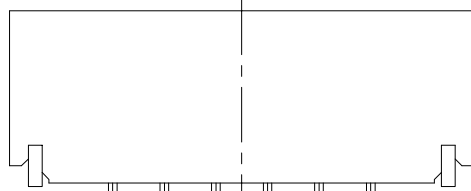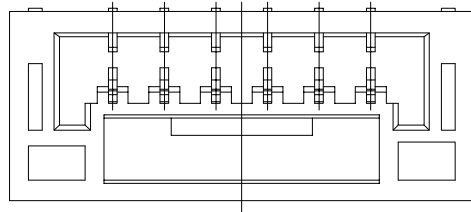

1.5±0.1
A ±0.2

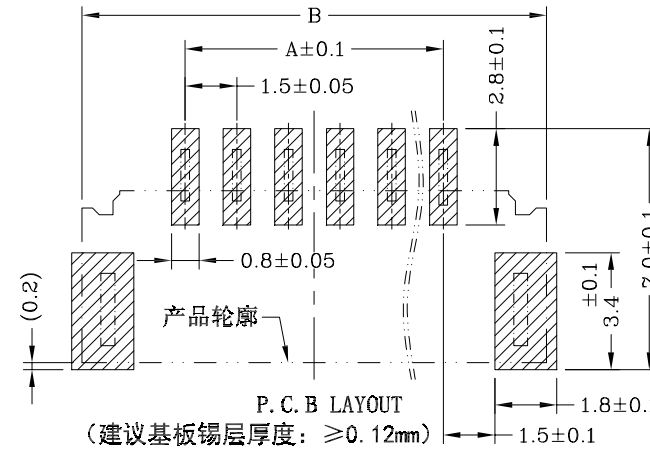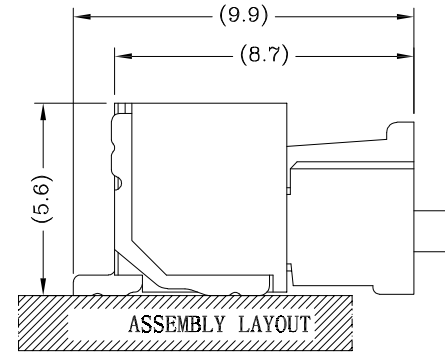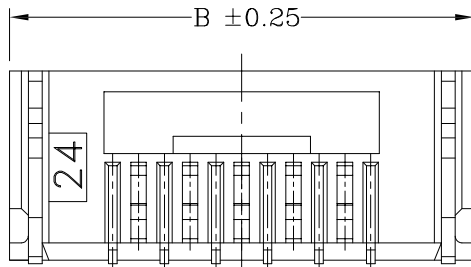

Poles	DIM.A	DIM.B
2P	1.5	7.5
3P	3.0	9.0
4P	4.5	10.5
5P	6.0	12.0
6P	7.5	13.5
7P	9.0	15.0
8P	10.5	16.5
9P	12.0	18.0
10P	13.5	19.5
11P	15.0	21.0
12P	16.5	22.5
13P	18.0	24.0
14P	19.5	25.5
15P	21.0	27.0

SPECIFICATIONS

- ◆ Applicable Wire: AWG.=30~/#24
- ◆ Voltage rating : 100V DC/AC
- ◆ Current rating: 2A (AWG.#24)
- ◆ Withstand voltage: 500V AC/m
- ◆ Working Temp : -25°C ~ +1
- ◆ Insulation resistance: ≥500
- ◆ Contact resistance: ≤20

■ MATERIAL: Insulator: Glass-filled polyamide, UL94-V0
Contact PIN: c5191
Solder tab: c5191



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST1510WRS-1*NPX-X

品名 TITLE: 1510卧贴

材料: C5191

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2024. 9. 11

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY

6

5

4

3

2

1

JD