
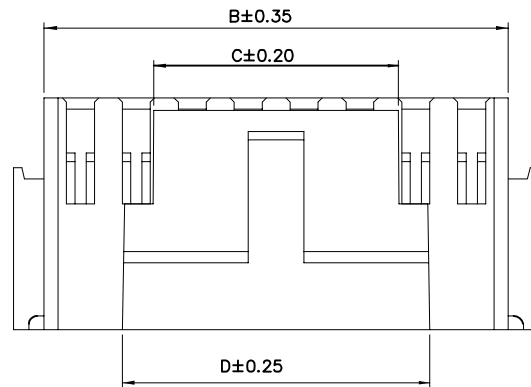
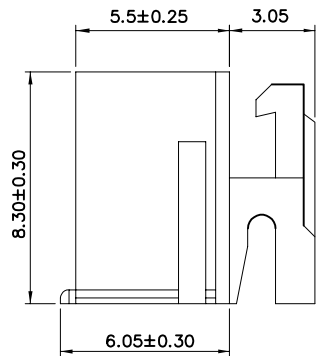
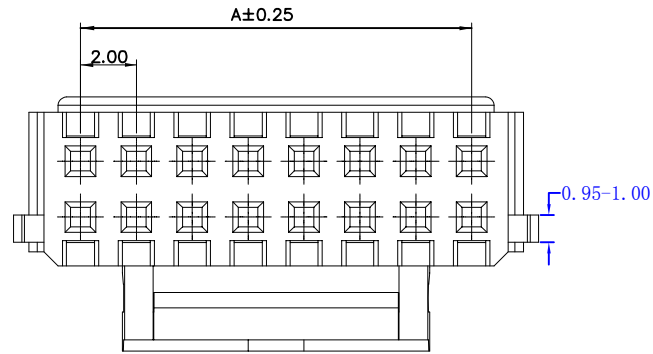


Circuit	Dimension(mm)				
	A	B	D	C	
ZZ	2*2	2. 00	4. 60	3. 10	2. 90
	2*3	4. 00	6. 60	3. 10	2. 90
	2*4	6. 00	8. 60	4. 17	2. 34
ZZ	2*5	8. 00	10. 60	5. 72	3. 12
ZZ	2*6	10. 00	12. 60	8. 20	5. 40
ZZ	2*7	12. 00	14. 60	9. 80	7. 05
ZZ	2*8	14. 00	16. 60	9. 70	7. 05
ZZ	2*9	16. 00	18. 60	13. 70	11. 10
ZZ	2*10	18. 00	20. 60	15. 70	13. 10
ZZ	2*11	20. 00	22. 60		
	2*12	22. 00	24. 60		
	2*13	24. 00	26. 60		
	2*14	26. 00	28. 60		
	2*15	28. 00	30. 60		
	2*16	30. 00	32. 60		
	2*17	32. 00	34. 60		
	2*18	34. 00	36. 60		
	2*20	38. 00	40. 60		

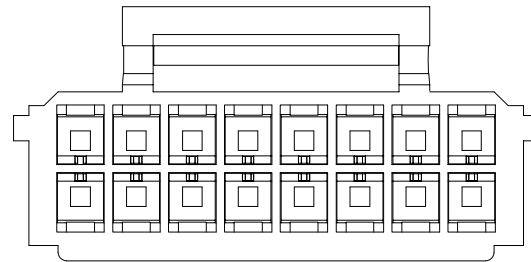

■ SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:1000V AC/minute
- Insulatin resistance:1000MΩ Min
- Temperature range:-20℃~+85℃
- Contact resistance:30mΩ Max
- Materials:PA66 UL94-V0

A1	2023. 4. 7	增加导向筋宽度0.95-1.00尺寸管控	张绪运
版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2011H-2*NPX-B-X

品名 TITLE: PHB-H(帶扣)

材料: PA66

单位: MM

包装规格:	
-------	--

比例:	1 : 1
-----	-------

一般公差 GENERAL TOLERANCE	
X. X	± 0.25
X. XX	± 0.20
ANGLE	$\pm 1^\circ$

