

13790510059



5

4



3

2



1

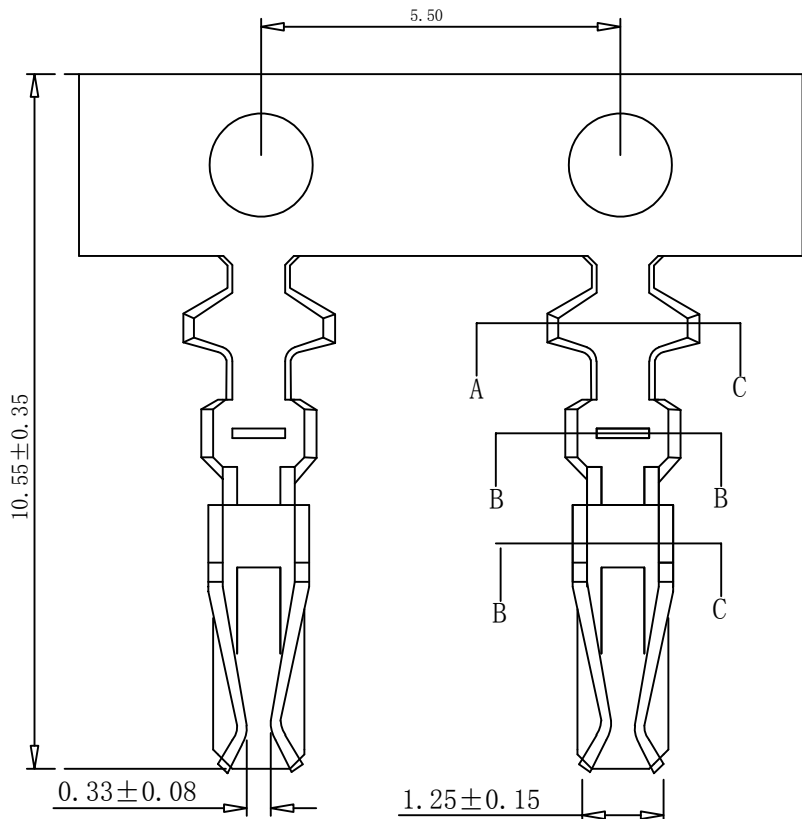


SECTION A-A

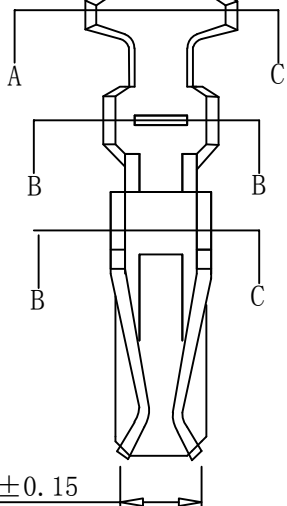

SECTION B-B

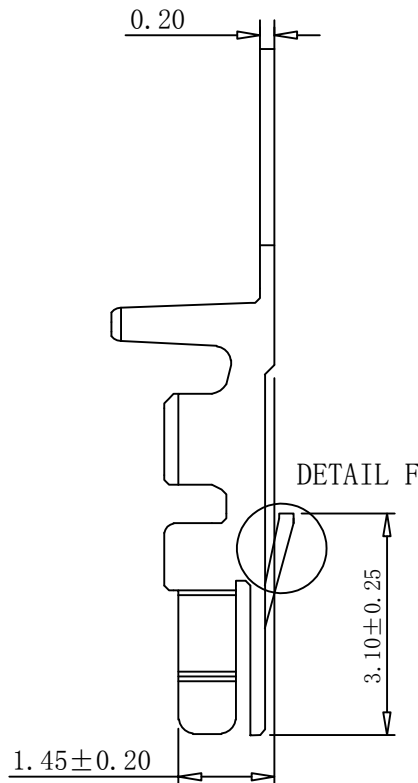

SECTION C-C

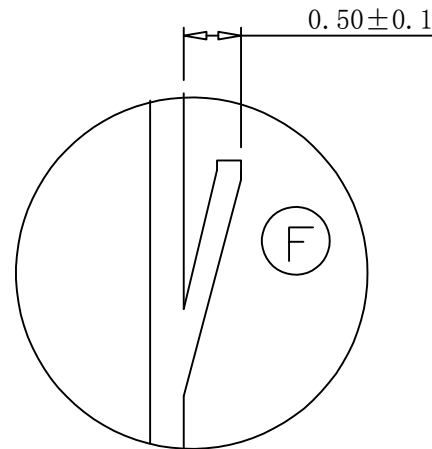

DETAIL F
SCALE 2:1

EST2011 T P X - 2 X - G

↑ 羿通代码+间距 ↑ T示意端子 ↑ X普通脚 ↑ H高脚 ↑ EH增高型脚 ↑ X普通 ↑ L长 ↑ S短 ↑ X公端 ↑ G母端 ↑ C示意90° ↑ S示意180°

0素材
2镀锡先冲后镀
3镀锡先镀后冲
5G、15G示意镀金5U"或15U"
1G示意镀金1U"

P磷铜
B黄铜
E合金铜

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -20℃~+85℃
- Contact resistance: 30mΩ Max
- Materials: C5191



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2011TPX-2X-G

品名 TITLE: PHB2.0-T

材料: C5191

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期: 2023.07.19

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°

版本 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



EST