
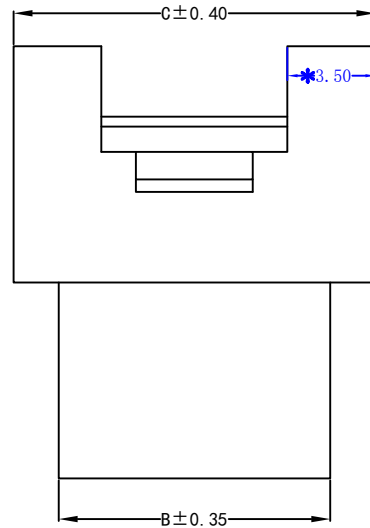
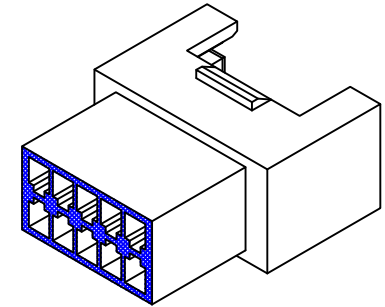
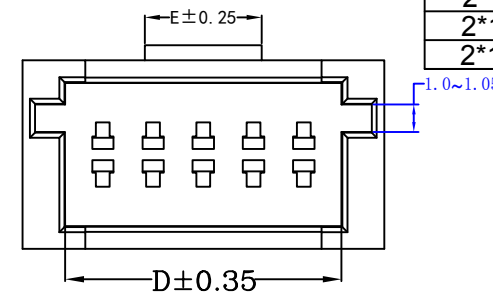


PIN No.	Dimension				
	A	B	C	D	E
2*2	2.00	4.80	8.40	5.00	2.60
2*3	4.00	6.80	10.40	7.00	2.60
2*4	6.00	8.80	12.40	9.00	2.60
2*5	8.00	10.80	14.40	11.00	4.70
2*6	10.00	12.00	16.00	13.00	6.70
2*7	12.00	14.80	18.40	15.00	8.70
2*8	14.00	16.00	20.40	17.00	10.70
2*9	16.00	18.80	22.40	19.00	12.70
2*10	18.00	20.80	24.40	21.00	14.70
2*11	20.00	22.80	26.40	23.00	16.70
2*12	22.00	24.80	28.40	25.00	18.70
2*13	24.00	26.80	30.40	27.00	20.70
2*14	26.00	28.80	32.40	29.00	22.70
2*15	28.00	30.80	34.40	31.00	24.70
2*18	34.00	36.80	40.40	37.00	30.70

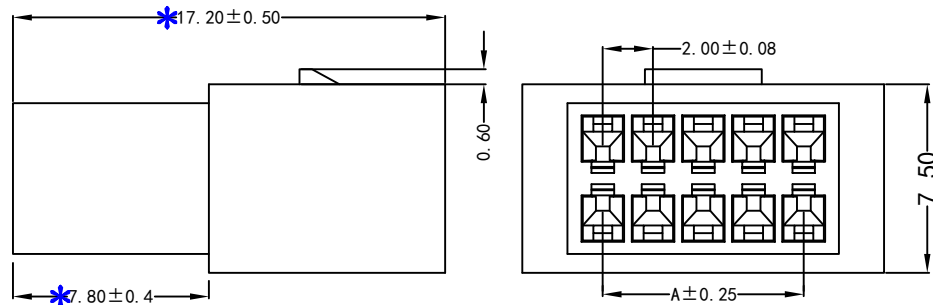

<u>EST2011</u>	H -	1*	NP	X -	B -	X -	HF-NK	- X
↑ 异通代码-间距		↑	↑	↑	↑	↑	↑	↑
				X本色 B黑色 R红色 I蓝色 Y黄色 G绿色 C透明	X普通 B带扣 C铜线 2L示意两侧带锁扣 U超薄F防呆型 HV常高凸点 LC常低凸点 X无槽 E有耳 NE无耳	X公胶壳 G母胶壳	NO MARK	A灼热丝750 B灼热丝850 X普通料
		PIN数					MF示意无齿 NF普通含齿	
		1示意单排 2示意双排						
	H示意胶壳, H后无数字默认材质V0 H后带数字2示意材质V2							

■ SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:1000V AC/minute
- Insulatin resistance:1000M Ω Min
- Temperature range:-20℃~+85℃
- Contact resistance:30m Ω Max
- Materials:PA66 UL94-V0

A1	2023. 4. 7	增加3.5管控, 变更导向槽1.1为1.0~1.05	张绪运
版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2011H-2*NPX-B-G

品名	TITLE: PHB2.0-H(帶扣母)
----	----------------------

材料：

单位:

	审核:
--	-----

包装规格:	
-------	--

	核准:
--	-----

比例:	1 : 1
-----	-------

日期:

一般公差	
GENERAL TOLERANCE	
X.X	± 0.30
X.XX	± 0.25
ANGLE	$\pm 1^\circ$

