

13790510059

5

4

3

2

1

F

E

D

C

B

A

F


E

D

C

B

A

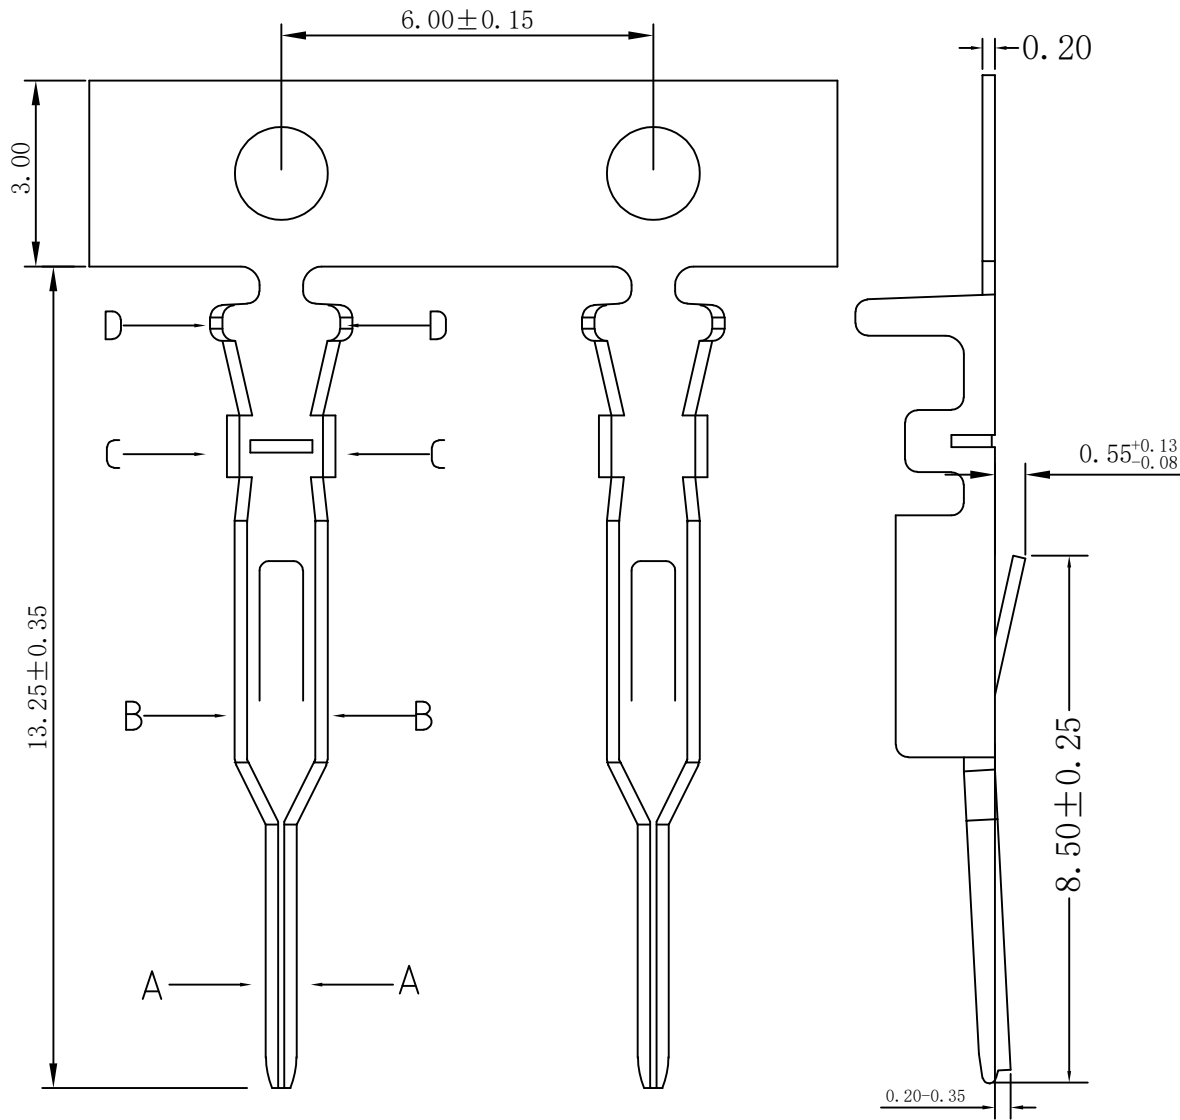

EST2011 T P X - 2 X- X

↑ 羿通代码+间距
↑ T示意端子
↑ X普通脚
↑ H高脚
↑ X普通
↑ L长
↑ S短
↑ X公端
↑ G母端
↑ C示意90°
↑ S示意180°

0素材
2镀锡先冲后镀
3镀锡先镀后冲
5G、15G示意镀金5U"或15U",
1G示意镀金1U"

P磷铜
B黄铜
E合金铜

- SPECIFICATIONS
- Voltage rating: 250V AC/DC;
 - Current rating: 3A AC/DC;
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ Min
 - Temperature range: -20℃~+85℃
 - Contact resistance: 30mΩ Max
 - Materials: C5191
 - Applicable wires AWG#26-AWG#30


版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST2011TPX-2X-X			
品名 TITLE: PHB-T(公)			
材料: C5191	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2023.11.16

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°



EST