

1379051059





5

4


3

2


1

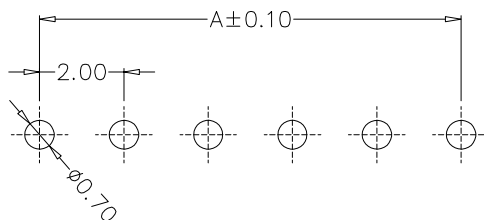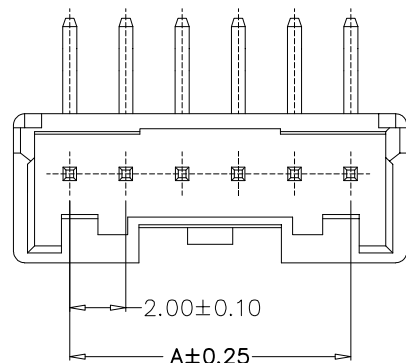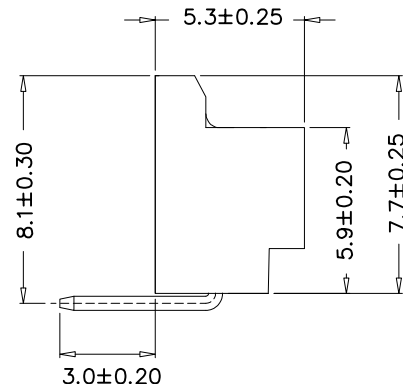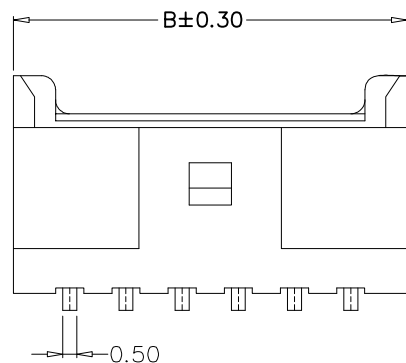

PCB LAYOUT



7~9A



10~16A

EST2025 W R - 1*NP X - X X - X X - NK-HF

↑ 原始代码-问题 ↑ 1*NP 1.黑色 2.蓝色 3.黄色 4.绿色 5.棕色 6.白色 7.红色 8.紫色 9.灰色 10.透明 11.其他颜色

↑ R 180° 直针, VS 立式 90° 弯针, RS 卧式

↑ W 示意针座 后无0默认材质为V0 后带2示意V2

↑ X X - NK-HF 1.为PPS, 2.为PBT, 3.为LCP, 4.为ABS, 5.为PA6T, 6.为PA66 7.为PBT, 8.为LCP, 9.为ABS, 10.为PA6T, 11.为PA66

SPECIFICATIONS

- Current Rating: 3A AC, DC
- Voltage Rating: 100V AC, DC
- Temperature Range: -25°C~+85°C
- Contact Resistance: 20mΩ Max
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800V AC/minute
- Material: Wafer PA66, UL94V-0
PIN Brass Tin-plated

poles	尺寸 (mm)	
	A	B
1*2	2.00	8.00
1*3	4.00	10.00
1*4	6.00	12.00
1*5	8.00	14.00
1*6	10.00	16.00
1*7	12.00	18.00
1*8	14.00	20.00
1*9	16.00	22.00
1*10	18.00	24.00
1*11	20.00	26.00
1*12	22.00	28.00
1*16	30.00	36.00

Company Name :DONGGUAN EASTOM INDUSTRIAL CO.,LTD
Address :1/2 WORKSHOP BUILDING NO.53 LONGYAN NINTH
ROAD ,HUMEI TOWN DONGGUAN GUANGDONG CHINA
Tell:13790510059

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2025WR-1*NPX-B

品名 TITLE: PA2.0Wafer 90° (有扣)

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2022. 3. 30

一般公差
GENERAL TOLERANCE
X, X ±0.25
X, XX ±0.20
ANGLE ±1°



ZT