

13790510059

5

4

3

2

1

F

E

D

C

B

A

F

E



D

C

B

A

HY

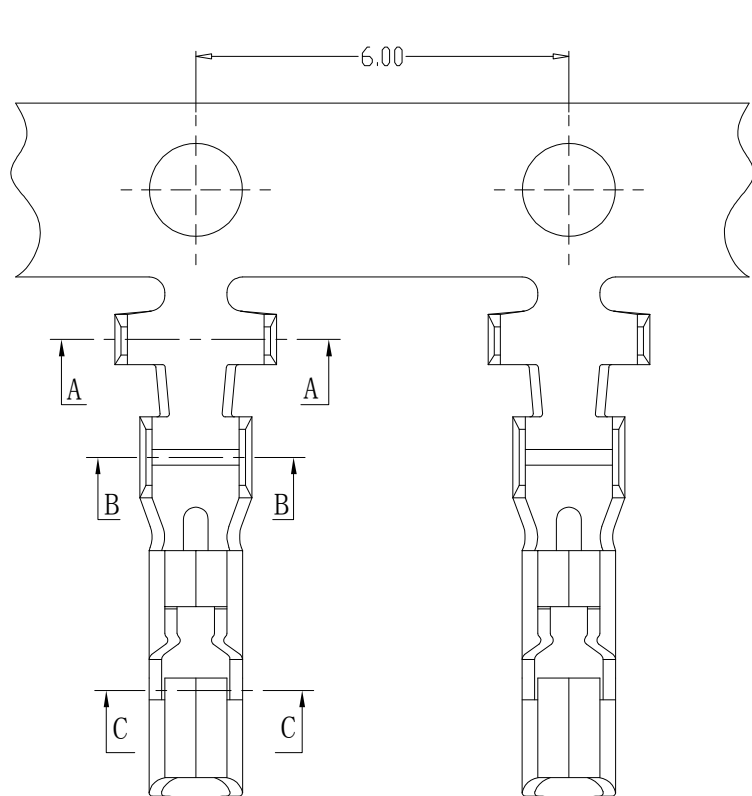

EST2001 T P X - 2 X - X

羿通代码+间距



T示意端子

X普通脚
H高脚
E增高型脚

X公端
G母端
C示意90°
S示意180°

0素材
2镀锡先冲后镀
3镀锡先镀后冲
4镀全镍(镀后冲)
4.2镀全镍先冲后镀
5G、15G示意镀金5U"或15U",
1G示意镀金1U"

P磷铜
B黄铜
E合金铜



SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2030TPX-2X-G

品名 TITLE: PAD2.0-T

材料: C5191

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2024. 3. 18

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核准 APPROVALBY

一般公差 GENERAL TOLERANCE	
X. X	±0.30
X. XX	±0.20
ANGLE	±1°

