

13790510059

5

4

3

2

1

F

E

D

C

B

A

F





E

D







C

B

A

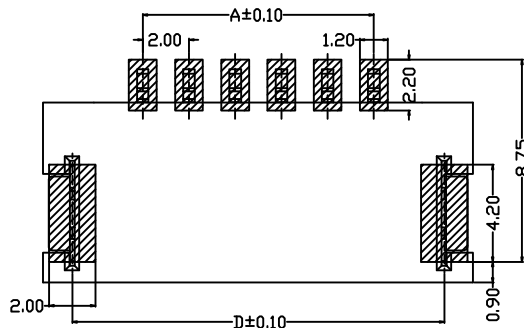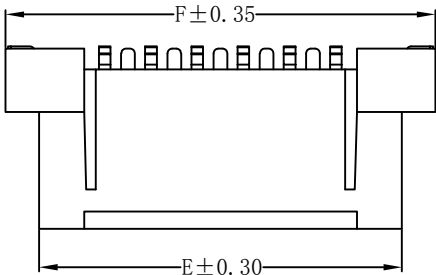

PCB LAYOUT

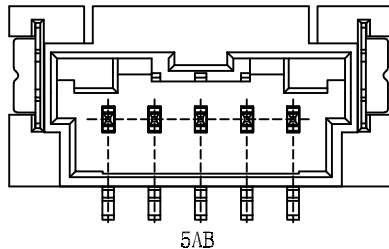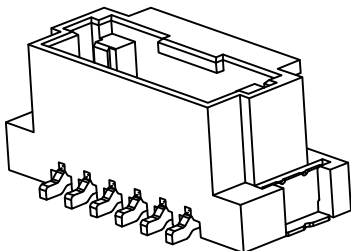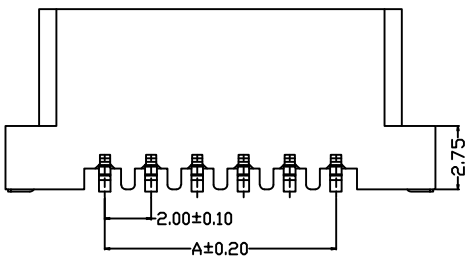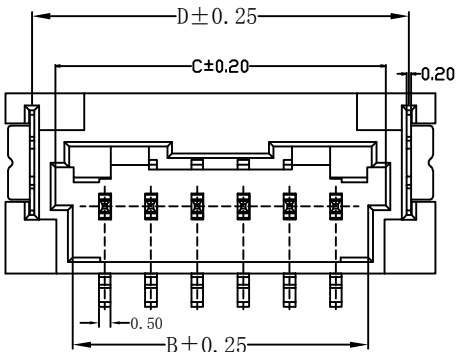

P/N	尺寸 (MM)					
	A	B	C	D	E	F
02	2.00	4.80	6.30	8.10	7.50	10.50
03	4.00	6.80	8.30	10.10	9.50	12.50
04	6.00	8.80	10.30	12.10	11.50	14.50
05	8.00	10.80	12.30	14.10	13.50	16.50
06	10.00	12.80	14.30	16.10	15.50	18.50
07	12.00	14.80	16.30	18.10	17.50	20.50
08	14.00	16.80	18.30	20.10	19.50	22.50
09	16.00	18.80	20.30	22.10	21.50	24.50
10	18.00	20.80	22.30	24.10	23.50	26.50
11	20.00	22.80	24.30	26.10	25.50	28.50
12	22.00	24.80	26.30	28.10	27.50	30.50
13	24.00	26.80	28.30	30.10	29.50	32.50
14	26.00	28.80	30.30	32.10	31.50	34.50
15	28.00	30.80	32.30	34.10	33.50	36.50

SPECIFICATIONS

- Voltage rating: 125V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 10mΩ Max

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2031WVS-1*NPX-X

品名 TITLE: 2031立贴

材料: PA9T

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2024. 7. 6

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
ANGLE ±1°



HY