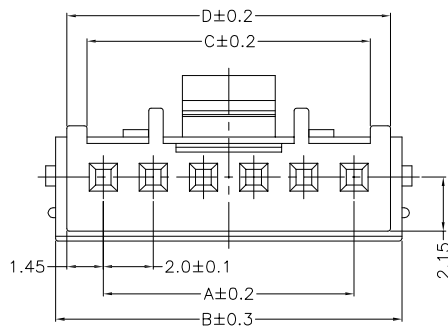
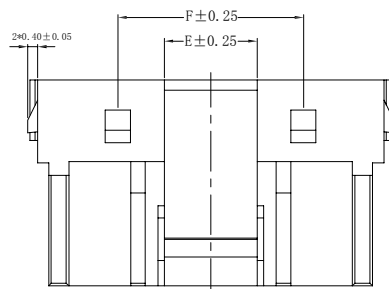
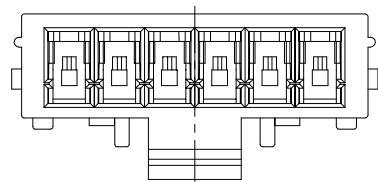


TER&amp;TPA Assembly Drawing

EST2032 H - 1\*NP X - B - X - HF-NK - X

↑ 羿通代码+间距

↑ PIN数  
1示意单排  
2示意双排

↑ X本色  
B黑色  
R红色  
L蓝色  
Y黄色  
G绿色  
C透明

↑ X普通  
B带扣  
C刺破  
2L示意两侧带锁扣  
U超薄F防呆型  
HV带高凸点  
LC带低凸点,  
K卡槽  
E有耳

↑ X公胶壳  
G母胶壳

↑ NO MARK

↑ A灼热丝750  
B灼热丝850  
X普通料

H示意胶壳,  
H后无数字默认材质V0  
H后带数字2示意材质V2

| Poles | DIMENSION(mm) |       |       |       |      |      |
|-------|---------------|-------|-------|-------|------|------|
|       | A             | B     | C     | D     | E    | F    |
| 2     | 2.00          | 5.80  |       | 4.90  | 2.20 |      |
| 3     | 4.00          | 7.80  |       | 6.90  | 3.70 |      |
| 4     | 6.00          | 9.80  | 7.30  | 8.90  | 3.70 |      |
| 5     | 8.00          | 11.80 | 9.30  | 10.90 | 3.70 | 7.40 |
| 6     | 10.00         | 13.80 | 11.30 | 12.90 | 3.70 | 7.40 |
| 7     | 12.00         | 15.80 | 13.30 | 14.90 | 3.70 | 7.40 |
| 8     | 14.00         | 17.80 | 15.30 | 16.90 | 3.70 | 7.40 |
| 9     | 16.00         | 19.80 | 17.30 | 18.90 | 3.70 | 7.40 |
| 10    | 18.00         | 21.80 | 19.30 | 20.90 | 3.70 | 7.40 |
| 11    | 20.00         | 23.80 | 21.30 | 22.90 | 3.70 | 7.40 |
| 12    | 22.00         | 25.80 | 23.30 | 24.90 | 3.70 | 7.40 |
| 13    | 24.00         | 27.80 | 25.30 | 26.90 | 3.70 | 7.40 |
| 14    | 26.00         | 29.80 | 27.30 | 28.90 | 3.70 | 7.40 |
| 15    | 28.00         | 31.80 | 29.30 | 30.90 | 3.70 | 7.40 |

Voltage rating: 250V AC/DC  
Current rating: 2.5A AC/DC(AWG#22)  
Withstanding Voltage: 1000V AC/minute  
Insulation resistance: 1000M  
Temperature range: -40°C - +105°C  
Contact resistance: 20m  
Material: PBT UL 94V-0, Color: White  
Q'TY: 1000 Pcs/Bag

| 日期版次<br>REVISION | 日期<br>DATE | 变更内容<br>DESCRIPTION | 核 准<br>APPROVALBY |
|------------------|------------|---------------------|-------------------|
|                  |            |                     |                   |
|                  |            |                     |                   |
|                  |            |                     |                   |



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2032H-1\*NPX-B-X

品名 TITLE: 2032-H

材料: PA66

单位: MM

包装规格:

比例: 1:1

制图:









审核:

核准:

日期: 2022. 6. 2

一般公差  
GENERAL TOLERANCE  
X, X ±0.25  
X, XX ±0.20  
ANGLE ±1°



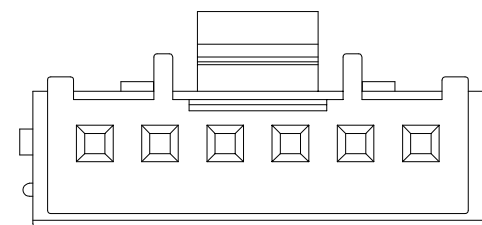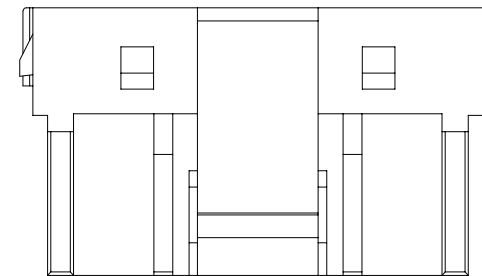

2Pin

3Pin

4Pin

5-15Pin

Voltage rating: 250V AC/DC  
Current rating: 2.5A AC/DC(AWG#22)  
Withstanding Voltage: 1000V AC/minute  
Insulation resistance: 1000M  
Temperature range: -40°C - +105°C  
Contact resistance: 20m  
Material: PBT UL 94V-0, Color: White  
Q'TY: 1000 Pcs/Bag



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2032H-1\*NPX-X-X

品名 TITLE: 2032-H

材料: PA66

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2022. 6. 2

一般公差  
GENERAL TOLERANCE  
X. X ±0.25  
X. XX ±0.20  
ANGLE ±1°



13790510059

5

4

3

2

1

F

F

E

E

D

D

C






C

B

B

A

A

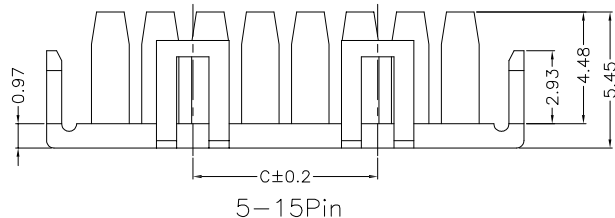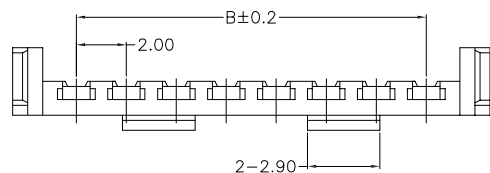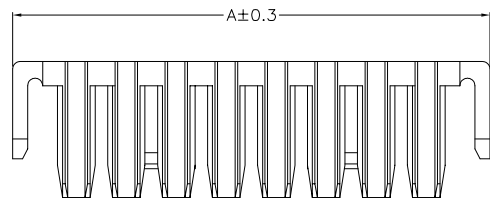

2-4Pin

| Poles | DIMENSION (mm) |       |      |
|-------|----------------|-------|------|
|       | A              | B     | C    |
| 2     | 7.10           | 2.00  |      |
| 3     | 9.10           | 4.00  |      |
| 4     | 11.10          | 6.00  |      |
| 5     | 13.10          | 8.00  | 7.40 |
| 6     | 15.10          | 10.00 | 7.40 |
| 7     | 17.10          | 12.00 | 7.40 |
| 8     | 19.10          | 14.00 | 7.40 |
| 9     | 21.10          | 16.00 | 7.40 |
| 10    | 23.10          | 18.00 | 7.40 |
| 11    | 25.10          | 20.00 | 7.40 |
| 12    | 27.10          | 22.00 | 7.40 |
| 13    | 29.10          | 24.00 | 7.40 |
| 14    | 31.10          | 26.00 | 7.40 |

Voltage rating: 250V AC/DC  
Current rating: 2.5A AC/DC(AWG#22)  
Withstanding Voltage: 1000V AC/minute  
Insulation resistance: 1000M  
Temperature range: -40°C - +105°C  
Contact resistance: 20m  
Material: PBT UL 94V-0, Color: White  
Q'TY: /



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO:

品名 TITLE: 2032塞子

材料: PA66

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2022. 6. 2

一般公差  
GENERAL TOLERANCE  
X. X ±0.25  
X. XX ±0.20  
ANGLE ±1°



XDYT