

13790510059

5

4

3

2

1

F

F

E

E

D

D

C






C

B

B

A

A

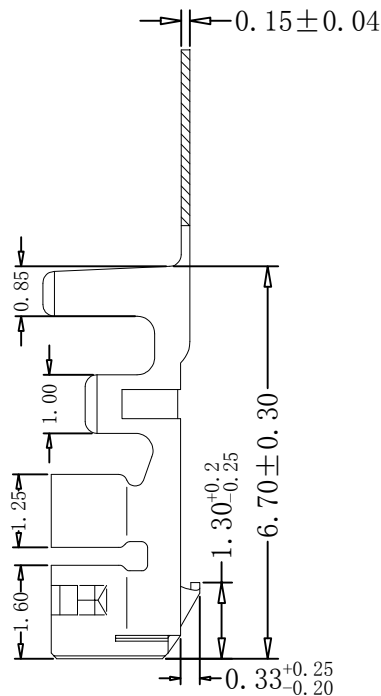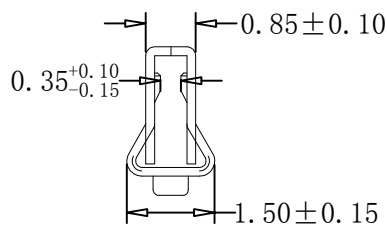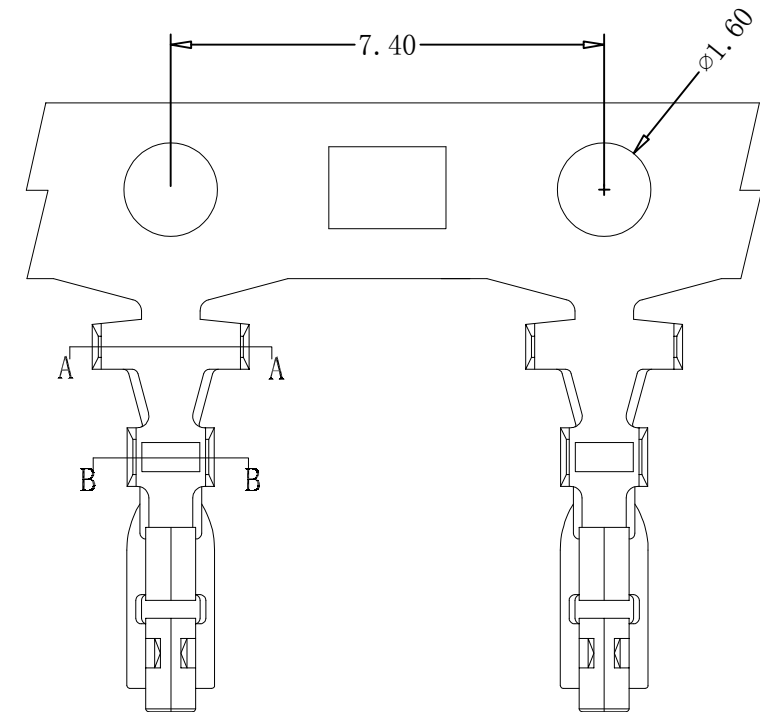

EST2032 T P X - 2 X - G

羿通代码+间距

T示意端子

X普通脚
H高脚
E增高型脚P磷铜
B黄铜
E合金铜0素材
2镀锡先冲后镀
3镀锡先镀后冲
4镀全镍(镀后冲)
5G、15G示镀金5U"或15U", 1G示镀金1U"X公端
G母端
C示意90°
S示意180°

Voltage rating: 250V AC/DC
Current rating: 2.5A AC/DC(AWG#22-AWG#28)
Withstanding Voltage: 1000V AC/minute
Insulation resistance: 1000M
Temperature range: -40°C - +105°C
Contact resistance: 20m
Material: PBT UL 94V-0, Color: White

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2032TPX-2X-G

品名 TITLE: 2032-T

材料: C5191

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2024. 8. 6

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°



XDYT