

13790510059


5

4


3

2

1




D ± 0.30

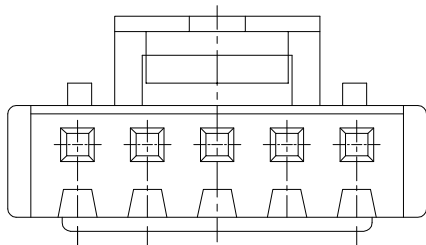


2.50 ± 0.10


A ± 0.30



2P-3P




4P




5P-15P


Poles	DIM.A	DIM.B	DIM.C	DIM.D
2	2.5	5.7	2.01	4.84
3	5.0	8.2	4.51	7.36
4	7.5	10.7	1.84	4.33
5	10.0	13.2	4.35	6.85
6	12.5	15.7	6.85	9.35
7	15.0	18.2	9.35	11.85
8	17.5	20.7	11.85	14.35
9	20.0	23.2	14.35	16.85
10	22.5	25.7	16.85	19.35
11	25.0	28.2	19.35	21.85
12	27.5	30.7	21.85	24.35
13	30.0	33.2	24.35	26.85
14	32.5	35.7	26.85	29.35
15	34.87	38.2	29.30	31.77
16	37.50	40.7	31.75	34.28



3P

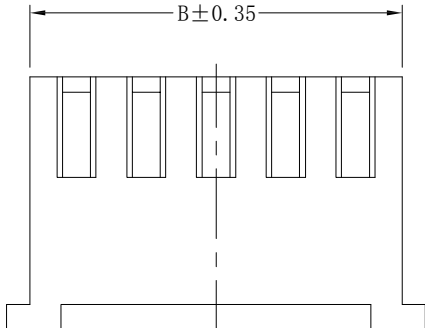

4P-15P



EST2501 H - 1*NP X - B - X - HF-NK - X

↑
羿通代码+间距

↑
X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

↑
PIN数
1示意单排
2示意双排

↑
H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

↑
X普通
B带扣
C刺破
2L示意两侧带锁扣
U超薄F防呆型
HV带高凸点
LC带低凸点,
K卡槽
E有耳

↑
X公胶壳
G母胶壳

↑
HF示意无卤
NF普通含卤

↑
NO MARK

↑
A灼热丝750
B灼热丝850
X普通料

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 20mΩ Max

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY
A1	2024. 2. 28	变更扣头形状	HAOJONGXIAN
A0	2023. 3. 10	新版试行	HAOJONGXIAN



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2501H-1*NPX-B-X

品名 TITLE: XH2.5-H公(带扣)

材料: PA66

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2024. 2. 28

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°



EST