

13790510059

5

4

3

2

1

F

E

D

C

B

A

F




E

D



C

B

A

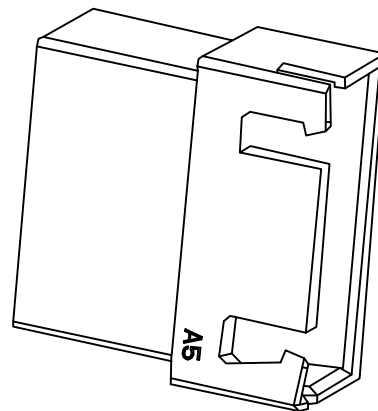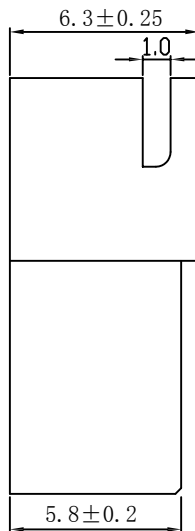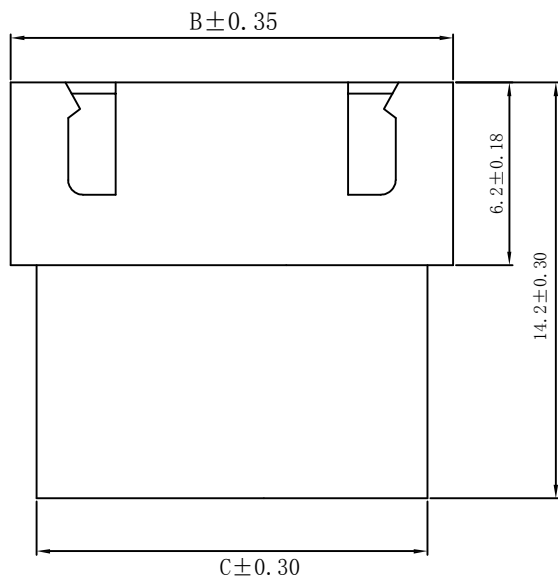

POLES	A	B	C
1*2	2.50	7.50	5.8
1*3	5.00	10.00	8.3
1*4	7.50	12.50	10.8
1*5	10.00	15.00	13.3
1*6	12.50	17.50	15.8
1*7	15.00	20.00	18.3
1*8	17.50	22.50	20.8
1*9	20.00	25.00	23.3
1*10	22.50	27.50	25.8
1*11	25.00	30.00	28.3
1*12	27.50	32.50	30.8
1*13	30.00	35.00	33.3
1*14	32.50	37.50	35.8
1*15	35.00	40.00	38.3

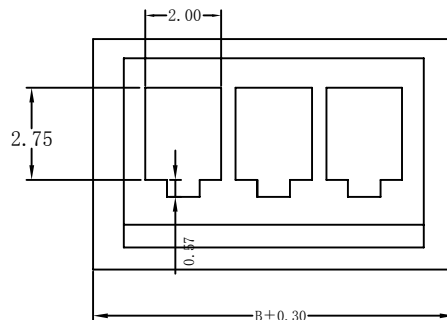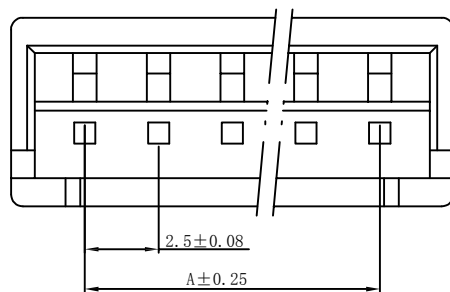

EST2501 H - 1*NP X - X - X - HF-NK - X

↑
羿通代码+ 间距

↑
X 普通
B 带扣
C 刺破
L 示意
U 超薄
HV 带高凸点
LC 带低凸点,
K 卡槽
E 有耳
NE 无耳

PIN数

1示意单排
2示意双排

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

↑
NO MARK

↑
A 灼热丝750
B 灼热丝850
X 普通料

SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:1000V AC/minute
- Insulatin resistance:1000MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:20mΩ Max



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2501H-1*NPX-X-G

品名 TITLE: XH2.5-H母(无扣)

材料: PA66

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2023. 3. 16

一般公差
GENERAL TOLERANCE
X. X ±0. 30
X. XX ±0. 20
ANGLE ±1°



6

5

4

3

2

1

YL