

13790510059

5

4






3

2

1

Recommended P.C.B Layout (Top Side)

P.C.B Thickness = 1.20mm
(Tolerance=±0.05)

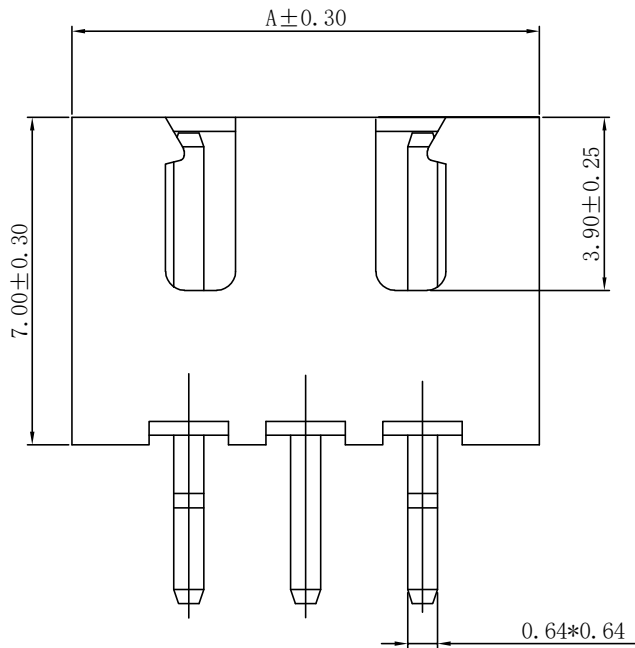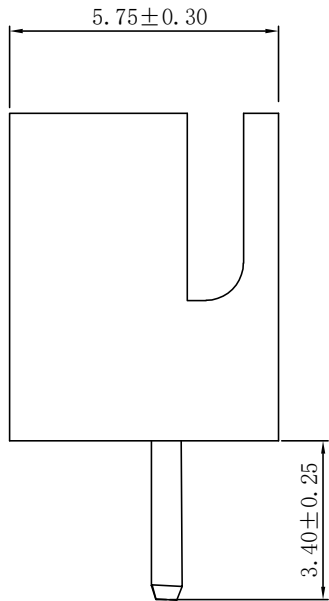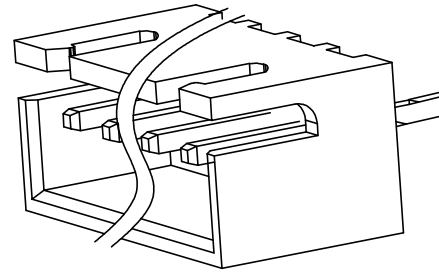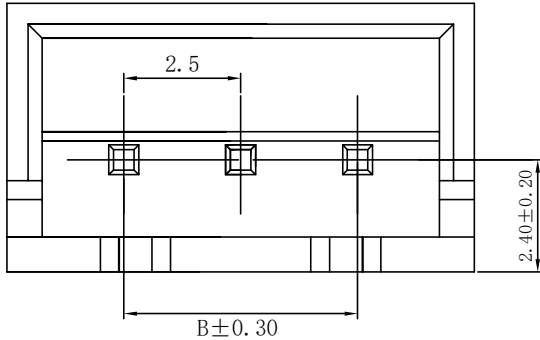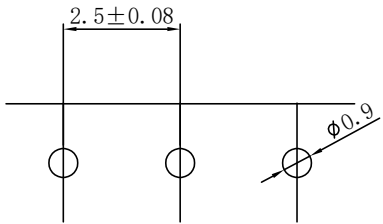

3P视图

EST2501 W V - 1*NP X - X - X X

↑ 界通代码+间距 ↑ 1单排 ↑ PIN数 ↑ X本色 ↑ 普通 ↑ G为PIN针镀金
↑ 2双排 ↑ 1黑色 ↑ B带扣 ↑ U超薄 ↑ S为PIN针镀锡
↑ V示意180°直针, ↑ R示意90°弯针, ↑ RS卧式 ↑ RG高弯 ↑ 1为PPS, ↑ 2为PBT, ↑ 3为LCP, ↑ 4为ABS, ↑ 5为PA6T, ↑ 6为PA66
↑ W示意针座 ↑ W后无0默认材质为V0 ↑ W后带2示意V2 ↑ H高弯 ↑ K打脚K ↑ D防呆型 ↑ 2示意有柱 ↑ L0带定位无K ↑ KLO带定位打K

Poles	Dimensions	
	A	B
1*2P	7.50	2.50
1*3P	10.00	5.00
1*4P	12.50	7.50
1*5P	15.00	10.00
1*6P	17.50	12.50
1*7P	20.00	15.00
1*8P	22.50	17.50
1*9P	25.00	20.00
1*10P	27.50	22.50
1*11P	30.00	25.00
1*12P	32.50	27.50
1*13P	35.00	30.00
1*14P	37.50	32.50
1*15P	40.00	35.00
1*16P	42.50	37.50

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 3A AC/DC;
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 25mΩ Max



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2501WV-1*NPX-X

品名TITLE: XH2.50直针(无K)

材料: PA66

Unit: MM

Q'ty/bao: 1000pcs

Scale: 1:1


DR: 胡宗显

CHKD: 张绪运

APPD: 李海平

DATE: 2023/03/16

GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°



EST