

13790510059



5

4



3

2

1

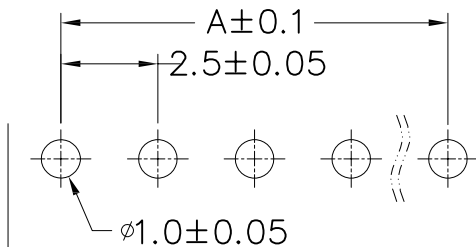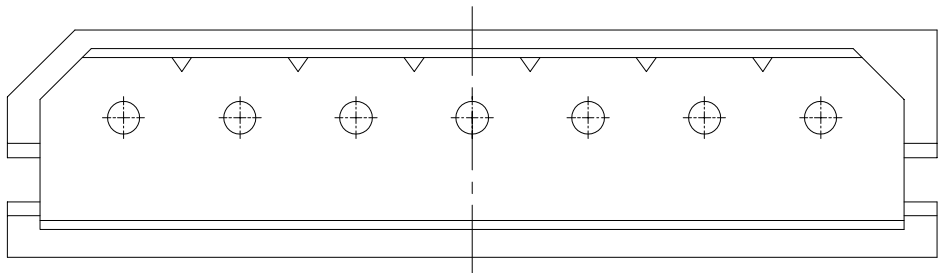

P.C.B LAYOUT

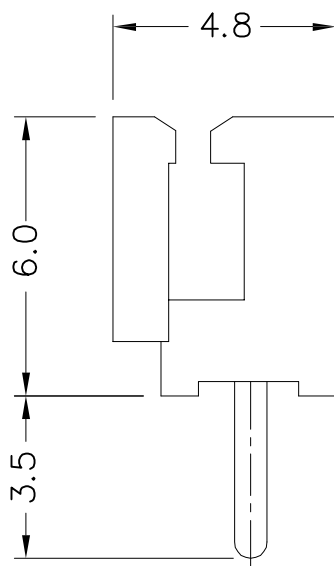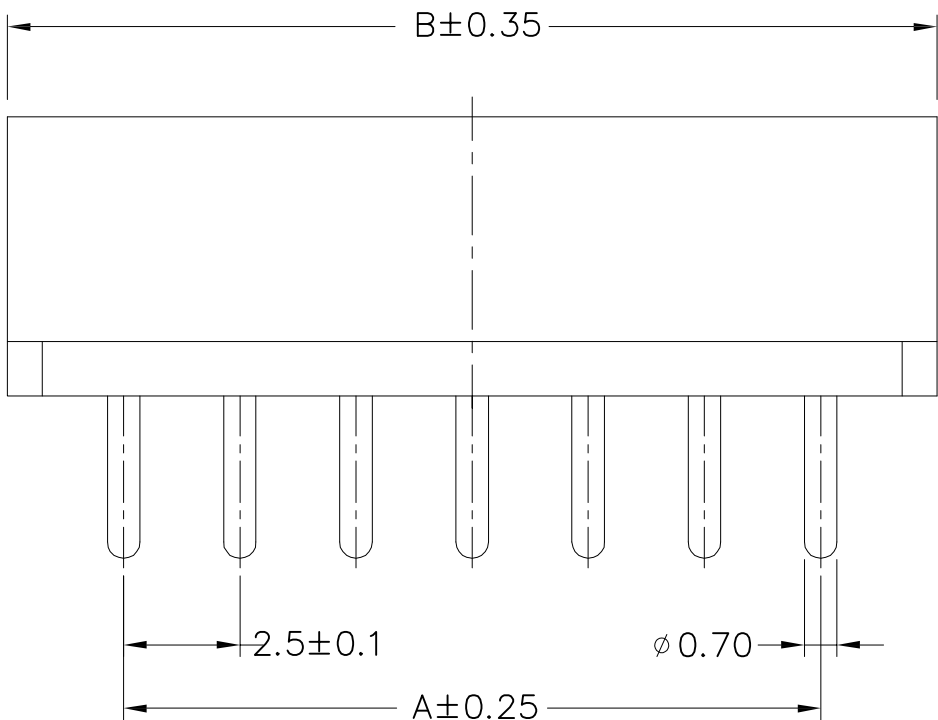

EST2505 W V - 1*NP X - X - X X - NK-HF

弄通代码+间距

1单排
2双排

PIN数 X本色
B蓝色
R红色
L蓝色
Y黄色
G绿色

X普通
B带扣
U超薄
PH组合排针
FH组合排母
H高弯
K打脚
D防呆型
2示意有柱
LD带定位孔
KLD带定位孔

1/PPS,2/PBT,3/LCP,4/ABS,
5/PA6T,
6/PA66

1/PIN针镀金
S/PIN针镀锡

HF无卤
NF普通含卤

NK为NO MARK
MK为有MARK

V示意针座
V后无0默认材质为V0
V后带2示意V2

V示意180°直针, VS立式
R示意90°弯针, RS卧式
RG高弯

Poles	DIM.A	DIM.B
2P	2.5	7.4
3P	5.0	9.9
4P	7.5	12.4
5P	10.0	14.9
6P	12.5	17.4
7P	15.0	19.9
8P	17.5	22.4
9P	20.0	24.9
10P	22.5	27.4
11P	25.0	29.9
12P	27.5	32.4
13P	30.0	34.9
14P	32.5	37.4
15P	35.0	39.9

■SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:2.5A AC/DC;
- Withstanding Voltage:800V AC/minute
- Insulatin resistance:1000MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:20mΩ Max
- Applicable wire:AWG#28 ~ AWG#22

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST2505WV-1*NPX-X

品名 TITLE: 5264-WAFER直针

材料: 单位: MM 包装规格: 比例: 1:1

制图: 审核: 核准: 日期: 2022/7/2

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.25
X.XXX ±0.10
ANGLE ±1°



6

5

4

3

2

1