

13790510059




5

4

3

2

1

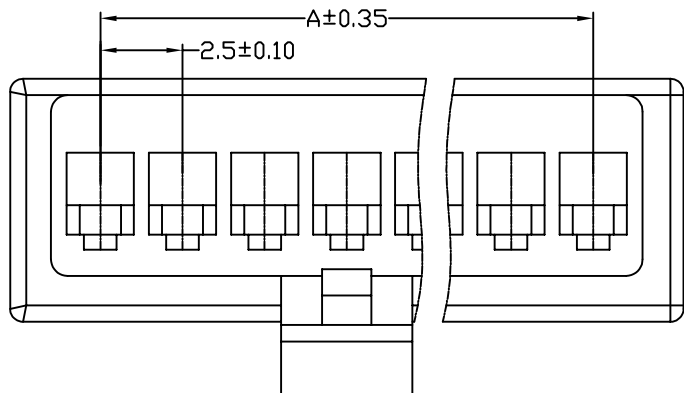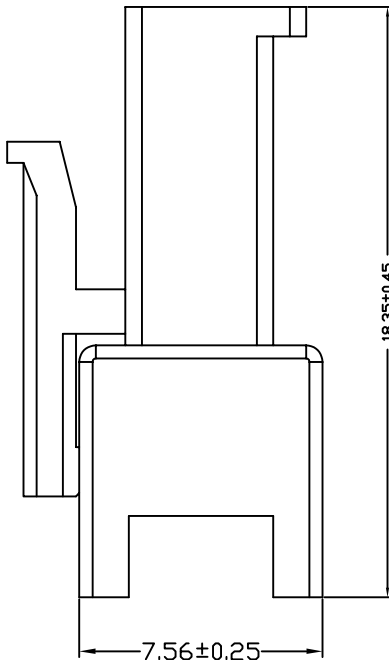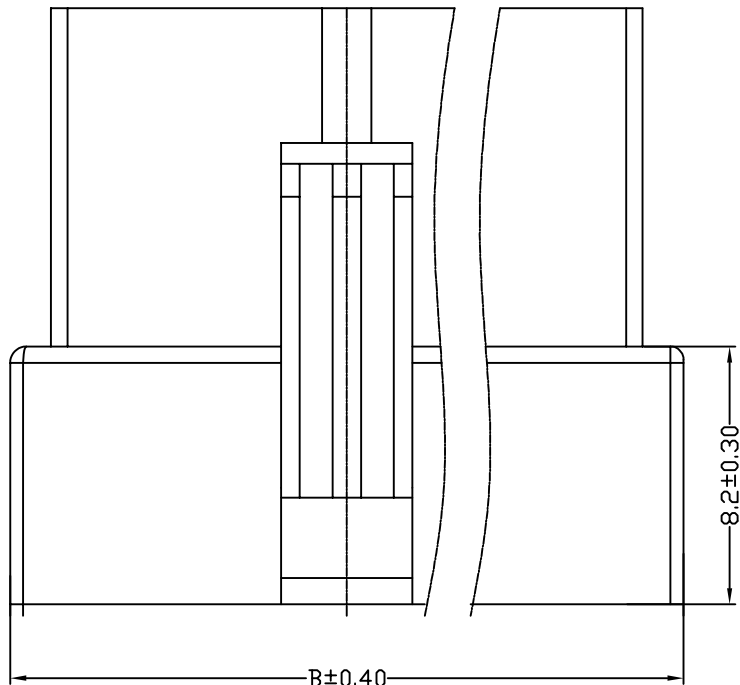

- SPECIFICATIONS
- Poles: 2~16p
 - Voltage rating: 250V AC/DC;
 - Current rating: 3.0A AC/DC;
 - Withstanding Voltage: 1000V AC/minute
 - Insulation resistance: 1000MΩ Min
 - Temperature range: -25℃~+85℃
 - Contact resistance: 20mΩ Max
 - Applicable wire: AWG#28~#22
 - Applicable PC board thickness: 0.5~0.2.0mm

EST2507 H - 1*NP X - B - X - HF-NK - X

↑
羿通代码+ 间距

X 本色
B 黑色
R 红色
L 蓝色
Y 黄色
G 绿色
C 透明

PIN数

1 示意单排
2 示意双排

H 示意胶壳,
H 后无数字默认材质V0
H 后带数字2示意材质V2

X 普通
B 带扣
C 刺破
2L 示意两侧带锁扣
U 超薄
F 防呆型
HV 带高凸点
LC 带低凸点,
K 卡槽
E 有耳

X 公胶壳
G 母胶壳

NO MARK

A 灼热丝750
B 灼热丝850
X 普通料

HF 示意无卤
NF 普通含卤

POLES	DIMENSIONS(MM)	
	A	B
2	2.5	8.1
3	5.0	10.6
4	7.5	13.1
5	10.0	15.6
6	12.5	18.1
7	15.0	20.6
8	17.5	23.1
9	20.0	25.6
10	22.5	28.1
11	25.0	30.6
12	27.5	33.1
13	30.0	35.6
14	32.5	38.1
15	35.0	40.6
16	37.5	43.1



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2507H-1*NPX-B-G

品名 TITLE: SM2.5-H母

材料:PA66

单位:

MM

包装规格:

比例:

1:1

审核:

核准:


日期:

2023-8-30

一般公差
GENERAL TOLERANCE
X.X ±0.35
X.XX ±0.30
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

制图:



6

5

4

3

2

1

YL