

13790510059




5

4

3

2

1

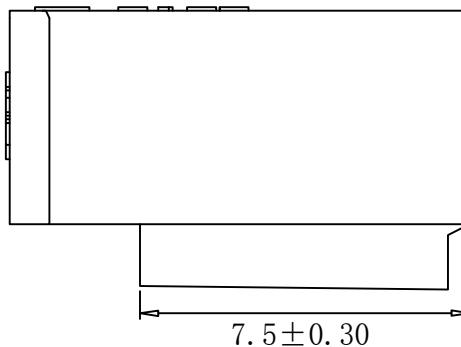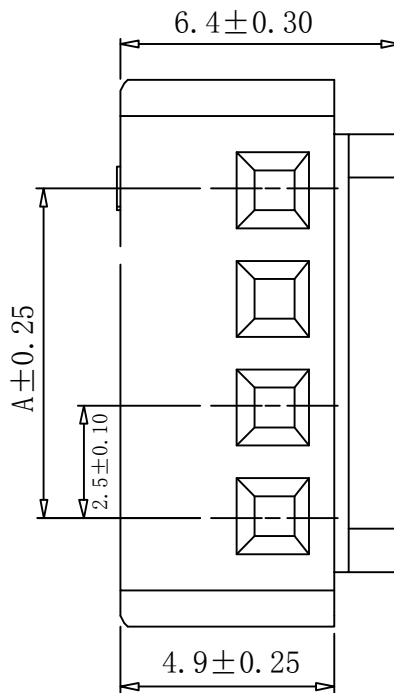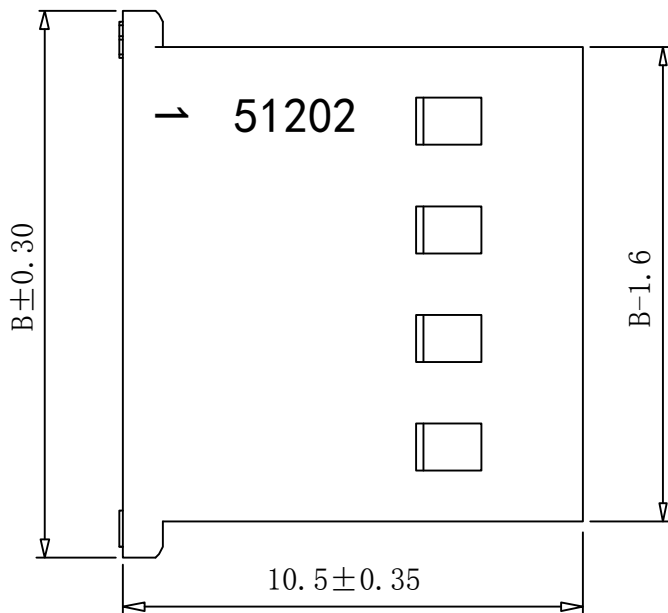

| Poles | dimensions mm |      |
|-------|---------------|------|
|       | A             | B    |
| 2     | 2.5           | 7.5  |
| 3     | 5.0           | 10.0 |
| 4     | 7.5           | 12.5 |

EST2509 H - 1\*NP X - X - X - HF-NK - X

↑ 羿通代码+间距

↑ X本色  
B黑色  
R红色  
L蓝色  
Y黄色  
G绿色  
C透明

↑ X普通  
B带扣  
C刺破  
2L示意两侧带锁扣  
U超薄F防呆型  
HV带高凸点  
LC带低凸点,  
K卡槽  
E有耳

↑ X公胶壳  
G母胶壳

↑ NO MARK

↑ A灼热丝750  
B灼热丝850  
X普通料

PIN数  
1示意单排  
2示意双排

H示意胶壳,  
H后无数字默认材质V0  
H后带数字2示意材质V2

#### PRODUCT SPECIFICATON

1. Material: PA66 94-V0
2. Temperature range:  $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$
3. Current rating: 2A AC/DC
4. Contact resistance:  $10\text{m}\Omega$  MAX
5. Insulation resistance:  $1000\text{M}\Omega$  MIN
6. Withstand voltage:  $1000\text{V AC/Minute}$
7. Applicable wire: AWG #28 TO #22



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2509H-1\*NPB-X-X

品名 TITLE: 5240-H公

材料: PA66

单位: MM

包装规格:

比例: 1:1


审核:

核准:

日期: 2022/7/2

| 日期版次<br>REVISION | 日期<br>DATE | 变更内容<br>DESCRIPTION | 核 准<br>APPROVALBY |
|------------------|------------|---------------------|-------------------|
|                  |            |                     |                   |
|                  |            |                     |                   |
|                  |            |                     |                   |

一般公差  
GENERAL TOLERANCE  
 $\leq 10$   $\pm 0.20$   
 $10 \sim 30$   $\pm 0.25$   
ANGLE  $\pm 1^{\circ}$



6

5

4

3

2

1

YL