
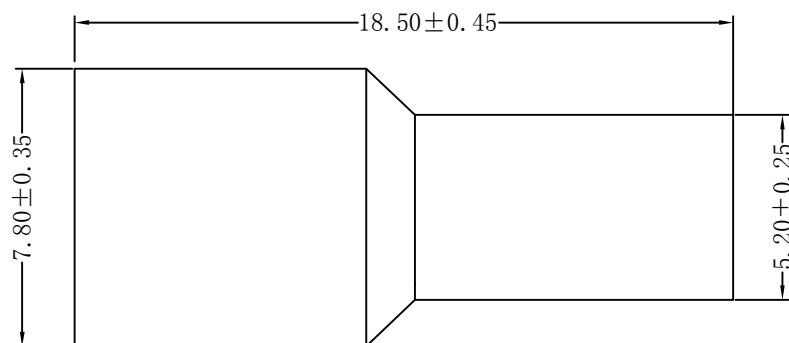
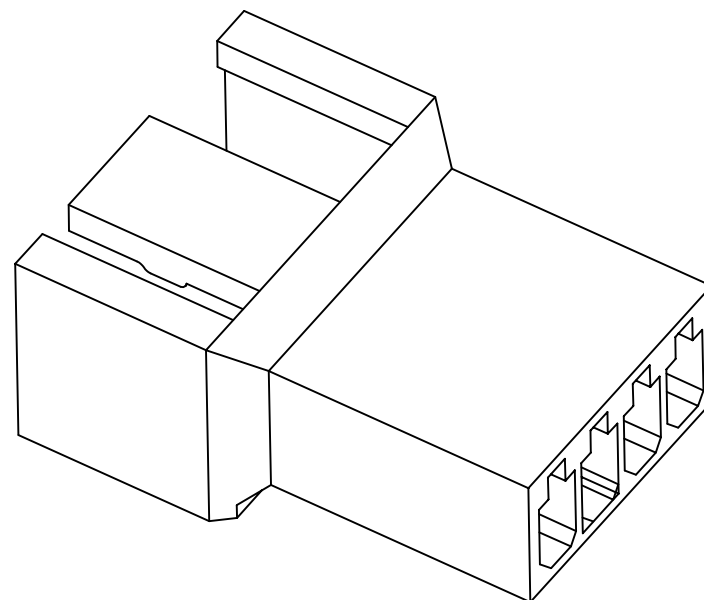
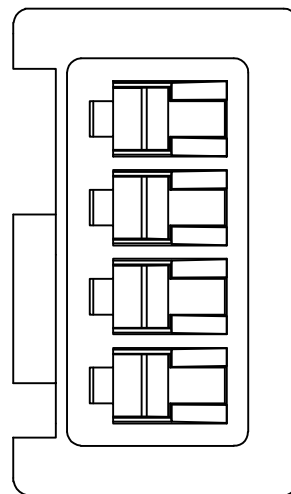


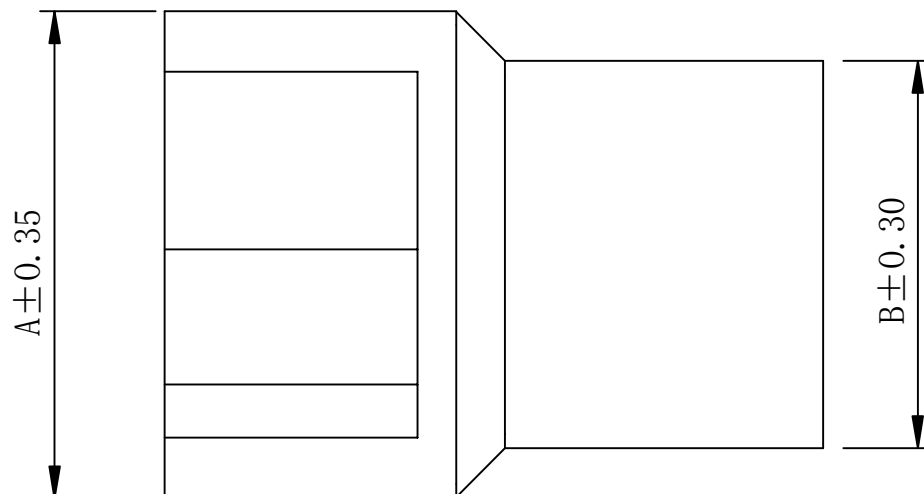

Part No.	Dimensions mm	
	A	B
1*2	8.56	5.80
1*3	11.06	8.30
1*4	13.56	10.80

PRODUCT SPECIFICATION

1. Material:PA66 94-V0
2. Temperature range:-25℃~+85℃
3. Current rating:3A AC/DC
4. Contact resistance:10mΩ MAX
5. Insulation resistance:1000MΩ MIN
6. Withstand voltage:1000V AC/Minute

版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL

EST2509 H - 1*NP X - F - G - HF-NK - X

↑
羿通代码+间距

↑
PIN数
1示意单排
2示意双排

↑
X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

↑
X普通
B带扣
C刺破
2L示意两侧带锁扣
U超薄F防呆型
HV带高凸点
LC带低凸点,
K卡槽
E有耳

↑
X胶外壳
G母胶壳

↑
NO MARK

↑
HF示意无卤
NF普通含卤

↑
A灼热丝750
B灼热丝850
X普通料

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2



东莞市奕通实业有限公司

DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2509H-1*NPB-F-G

品名 TITLE: 5240-H母(偏)

材料:PA66

单位: **MM**

包装规格:

比例:	1 : 1
-----	-------

日期:

一般公差	
GENERAL TOLERANCE	
X, X	± 0.30
X, XX	± 0.20
ANGLE	$+1^\circ$

