

13790510059






5

4

3

2

1

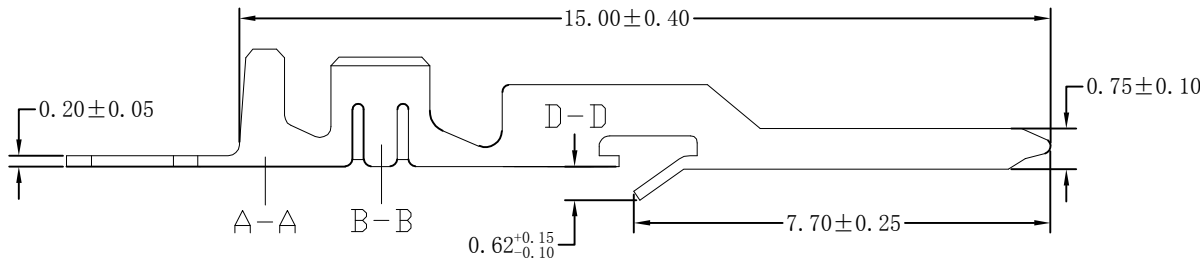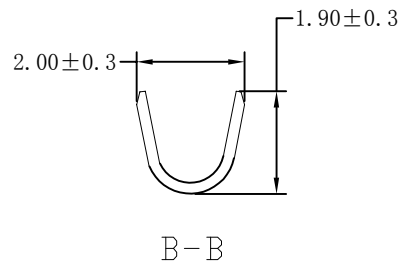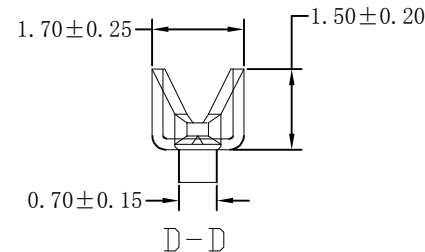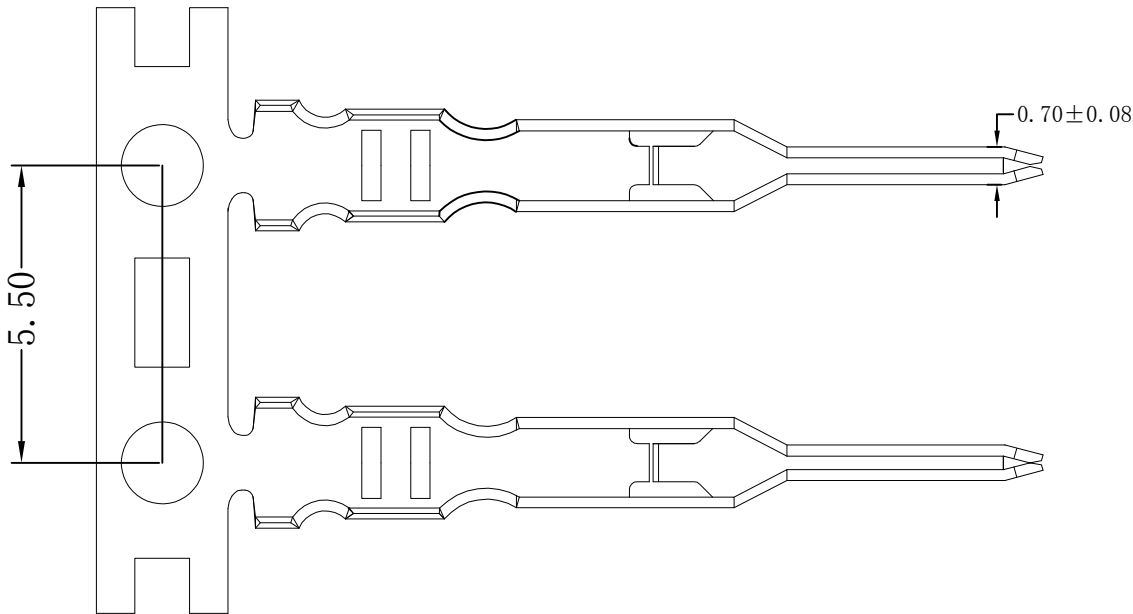

EST2509 T P X - 2 X- X

羿通代码+间距

T示意端子

X普通脚
H高脚
E增高型脚

P磷铜
B黄铜
E合金铜

0素材
2镀锡先冲后镀
3镀锡先镀后冲
4镀全镍(镀后冲)
4.2镀全镍先冲后镀
5G、15G示意镀金5U"或15U", 1G示意镀金1U"

X公端
G母端
C示意90°
S示意180°


PRODUCT SPECIFICATION

1. Material: BRONZE
2. Temperature range: -25°C ~ 85°C
3. Current rating: 2A AC/DC
4. Contact resistance: 10mΩ MAX
5. Insulation resistance: 1000MΩ MIN
6. Withstand voltage: 1000V AC/Minute
7. Applicable wire: AWG #28 TO #22

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2509TPX-2X-X				一般公差 GENERAL TOLERANCE	
品名 TITLE: 5240-T公				X. X	±0.35
材料: BRONZE				X. XX	±0.25
单位: MM	包装规格: 10K/ROLL	比例: 1:1	日期: 2023/08/30	ANGLE	±1°
制图:	审核:	核准:	日期:		

6

5

4

3

2

1

ZX