

13790510059



5

4

3

2

1

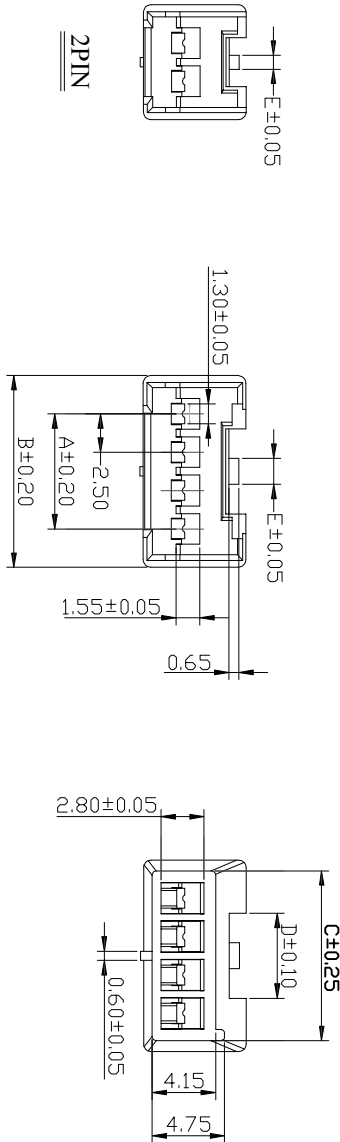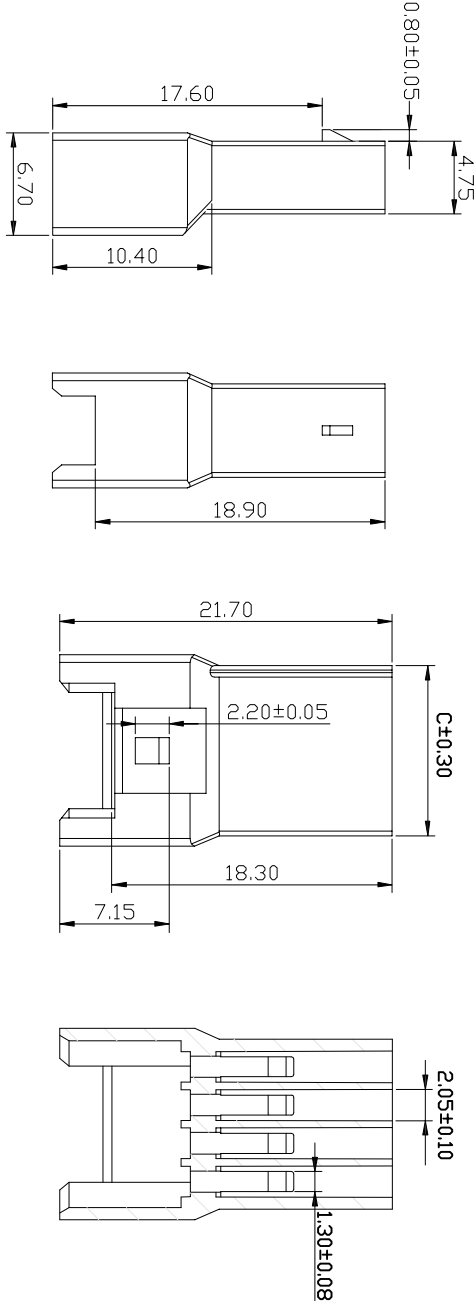

Poles	Dimensions (mm)				
	A	B	C	D	E
2	2.50	7.50	6.10	3.20	0.80
3	5.00	10.00	8.60	4.80	1.60
4	7.50	12.50	11.10	5.40	1.60
5	10.00	15.00	13.60	5.40	1.60
6	12.50	17.50	16.10	5.40	1.60
7	15.00	20.00	18.60	5.40	1.60
8	17.50	22.50	21.10	5.40	1.60
9	20.00	25.00	23.60	5.40	1.60
10	22.50	27.50	26.10	5.40	1.60
12	27.50	32.30	30.65	5.40	1.60
14	32.50	37.30	35.65	5.40	1.60

Specifications:

Voltage rating: 250V AC/DC
Current rating: 3A AC/DC
Withstanding voltage: 100V AC/minute
Temperature range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Insulation resistance: $\geq 1000\text{M}\Omega$
Contact resistance: $10 \leq 10\text{m}\Omega$
After environmental testing: $\leq 20\text{m}\Omega$



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2522H-1*NPX-B-G

品名 TITLE: 2522-H母 (带扣)

材料:

单位:

MM

包装规格:

比例:

1:1

日期:

2021. 09. 30

一般公差

GENERAL TOLERANCE

X.XX ± 0.25

X.XX ± 0.20

ANGLE $\pm 1^{\circ}$

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY	制 图	审 核	日期

6

5








4

3

2

1

YZ

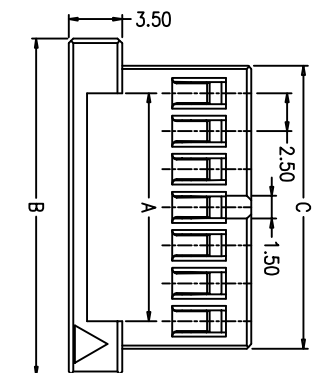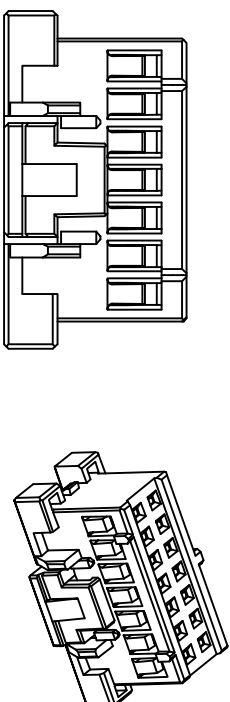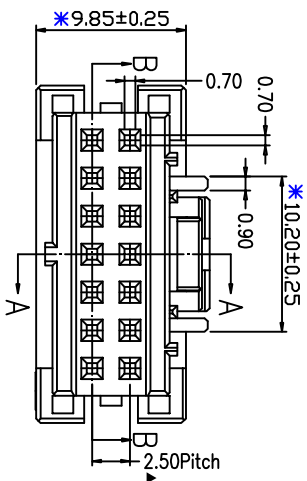

Poles	Dimensions (mm)	
	A	B
2x04	7.50	14.70
2x05	10.00	17.20
2x06	12.50	19.70
2x07	15.00	22.20
2x08	17.50	24.70
2x09	20.00	27.20
2x10	22.50	29.70
2x11	25.00	32.50
2x12	27.50	34.70
2x13	30.00	37.20
2x14	32.50	39.70
2x15	35.00	42.20
2x16	37.50	44.70
2x17	40.00	47.20
2x18	42.50	49.70
2x20	47.50	54.70

EST2522 H - 2*NP X - B - X - HF - NK - X

↑

异通代码-间距

↑

PLN数

↑

X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

↑

X普通
B背扣
C胶皮
L示意LOCK TYPE
U超薄防呆型
K带低凸点,
L卡卡槽

↑

X胶壳
G母胶壳

↑

NO MARK

↑

A约热丝750
B约热丝850
X普通料

↑

HF示意无卤
NF符合卤

↑

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2




东莞市羿通实业有限公司
DONGGUAN EASTON ELECTRONIC Co., Ltd.

Specifications:
Voltage rating:250V AC/DC
Current rating:3A AC/DC

Current rating: 3A AC/DC
Withstanding voltage: 100V AC/minute
Temperature range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
Insulation resistance: $\geq 1000\text{M}\Omega$
Contact resistance: $10 \leq 10\text{m}\Omega$
After environmental testing: $\leq 20\text{m}\Omega$

			料号PART NO: EST2522H-2*NPX-B-X			一般公差 GENERAL TOLERANCE X.X ±0.30 X.XX ±0.20 ANGLE ±°
			品名 TITLE: 2522-H公(双排带扣)			
			材料:	单位: MM	包装规格:	
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY	制图:	审核:	批准:
						比例: 1:1
						日期: 2021.09.30
						



13790510059












5

4

3

2

1

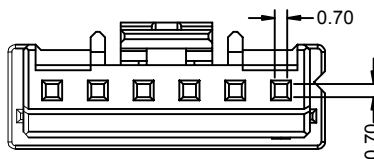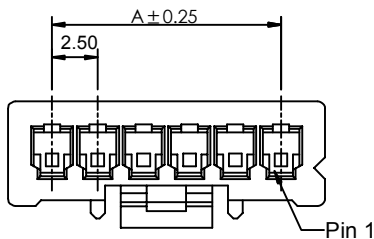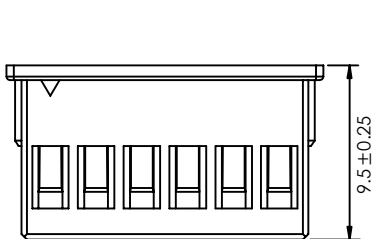

Poles	Dimensions (mm)		
	A	B	C
2	2.50	7.30	5.65
3	5.00	9.80	8.15
4	7.50	12.30	10.65
5	10.00	14.80	13.15
6	12.50	17.30	15.65
7	15.00	19.80	18.15
8	17.50	22.30	20.65
9	20.00	24.80	23.15
10	22.50	27.30	25.65
11	25.00	29.80	28.15
12	27.50	32.30	30.65
13	30.00	34.80	33.15
14	32.50	37.30	35.65
15	35.00	39.80	38.15

EST2522 H - 1*NP X - B - X - HF-NK - X

↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑

↑ 羿通代码+间距

↑ PIN数

↑ X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

↑ X普通
B带扣
C刺破
L示意LOCK TYPE
U超薄F防呆型
HV带高凸点
LC带低凸点,
K卡槽
E有耳
NE无耳

↑ H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

↑ NO MARK

↑ HF示意无卤
NF普通含卤

↑ A灼热丝750
B灼热丝850
X普通料

Specifications:

Voltage rating:250V AC/DC
Current rating:3A AC/DC
Withstanding voltage:100V AC/minute
Temperature range:-25℃~+85℃
Insulation resistance:≥1000MΩ
Contact resistance:10≤10MΩ
After environmental testing:≤20MΩ
Material:PA66 UL94-V0


日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY










东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2522H-1*NPX-B-X			
品名 TITLE: 2522-H公(单排带扣)			
材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2022. 4. 29


一般公差 GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°




YZ

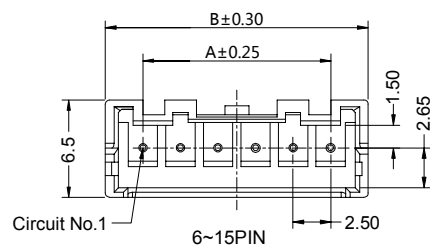2PIN3PIN4~5PIN


With a boss、With Kink



Without a boss、With Kink



With a boss、Without Kink





Without a boss、Without Kink

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: $\geq 1000M \Omega$
- Contact resistance: $\leq 10m \Omega$
- After environmental testing: $\leq 20m \Omega$
- Material(Pin):Brass

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
02	2.50	7.50	09	20.00	25.00
03	5.00	10.00	10	22.50	27.50
04	7.50	12.50	11	25.00	30.00
05	10.00	15.00	12	27.50	32.50
06	12.50	17.50	13	30.00	35.00
07	15.00	20.00	14	32.50	37.50
08	17.50	22.50	15	35.00	40.00

RECOMMENDED P.C.B LAYOUT
(TOLERANCE:±0.05)

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2522V-1*NPX-X

品名 TITLE: 2522-Wafer直针单排带柱

材料:

单位: MM

包装规格:

比例: 1:1

制图:






审核:

核准:

日期: 2021. 09. 30

一般公差
GENERAL TOLERANCE
X, X ±0.30
X, XX ±0.20
ANGLE ±1°

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY

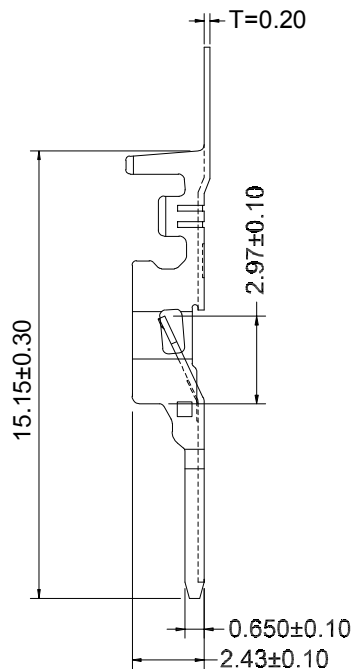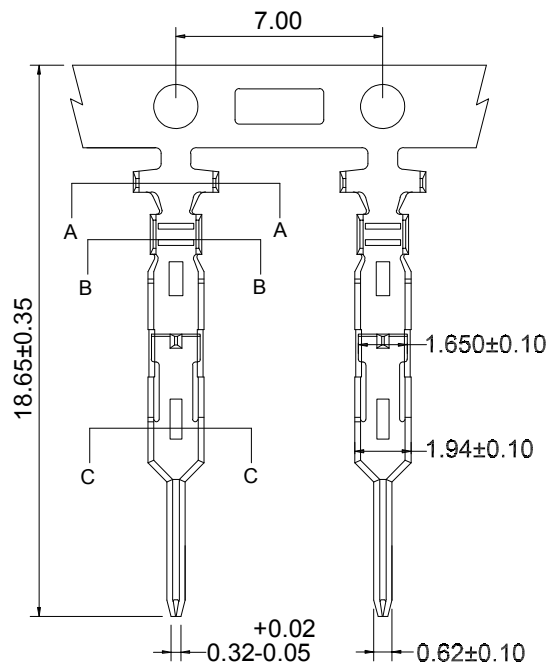**Specifications(规格):**

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 3A AC / DC
- Withstanding voltage(耐压值): 1000V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): $\geq 1000M\Omega$
- Contact resistance(接触电阻): $\leq 10m\Omega$
- After environmental testing(环境测试后): $\leq 20m\Omega$

EST2522TPX-2X-X	Phosphor Bronze	AWG#22-26	1.60mm(Max)	Plating Before Stamping: 10~15u" Ni; 60~80u" Sn	7,000Pcs
PART NO	Material	Wire Range	Insulation O.D.	Finish	Q' ty/Reel



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2522TPX-2X-X

品名 TITLE: 2522-T公

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2021. 09. 30

一般公差
GENERAL TOLERANCE
X. X ± 0.30
X. XX ± 0.20
ANGLE $\pm 1^\circ$



13790510059






5

4

3

2

1

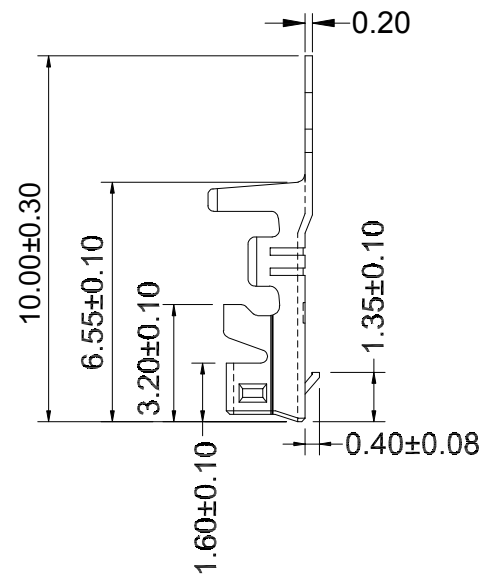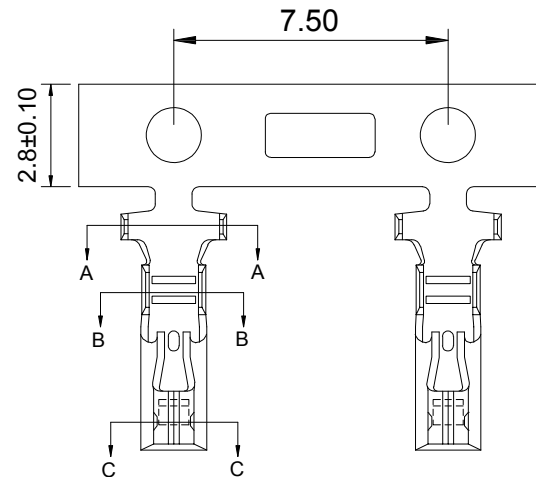SECTION:A-ASECTION:B-BSECTION:C-C

EST2522TPX	Phosphor Bronze	AWG#22-26	1.60mm(Max)	Plating Before Stamping:10~15u" Ni;60~80u"S _n	8,000Pcs
PART NO	Material	Wire Range	Insulation O.D.	Finish	Q' ty/Reel

■ Specifications:

Voltage rating:250V AC/DC
Current rating:3A AC/DC
Withstanding voltage:100V AC/minute
Temperature range:-25℃~+85℃
Insulation resistance:≥1000MΩ
Contact resistance:10≤10MΩ
After environmental testing:≤20MΩ

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2522TPX-2X-G

品名 TITLE: 2522-T(母)

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:





核准:

日期: 2021. 09. 30

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°




YZ

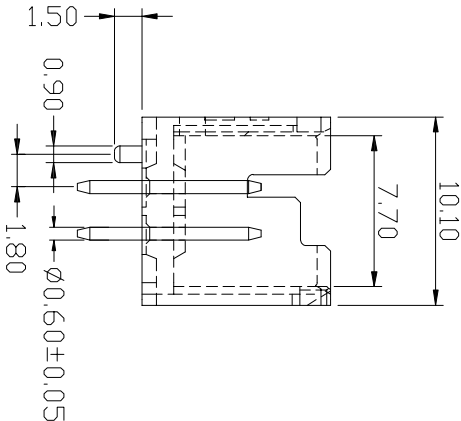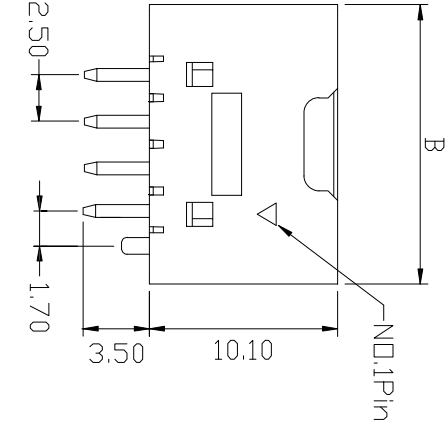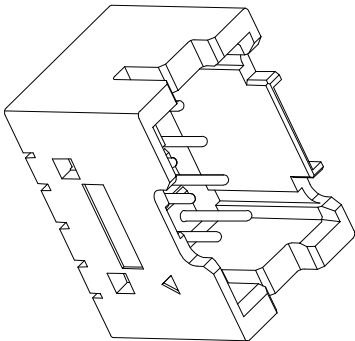

- Specifications(规格) :
- Voltage rating(额定电压) : 250V AC / DC
 - Current rating(额定电流) : 3A AC / DC
 - Withstanding voltage(耐压值) : 1000V AC/minute
 - Temperature range(工作温度) : -25°C~+85°C
 - Insulation resistance(绝缘电阻) ≥1000MΩ
 - Contact resistance(接触电阻) : ≤10mΩ
 - After environmental testing(环境测试后) : ≤20mΩ





Poles	Dimensions (mm)		
	A	B	C
08	7.50	15.00	11.10
10	10.00	17.50	13.60
12	12.50	20.00	16.10
14	15.00	22.50	18.60
16	17.50	25.00	21.10
18	20.00	27.50	23.60
20	22.50	30.00	26.10
22	25.00	32.50	28.60
24	27.00	35.00	31.10
26	30.00	37.50	33.60
30	35.00	42.50	36.10
32	37.50	45.00	38.60
34	40.00	47.50	41.10
36	42.50	50.00	43.60
40	47.50	55.00	46.10

EST2522V-2*NPX-2	Nylon 46 UL 94V-0	Brass	Tin-Plated	1,000Pcs
PART NO	Material	Material(Pin)	Finish(Pin)	Q'ty/Bag

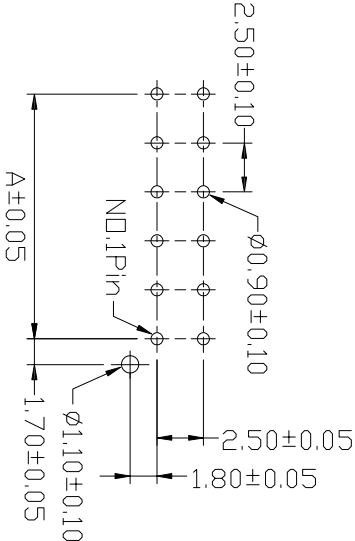

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.


料号PART NO: EST2522V-2*NPX-2		品名 TITLE: 2522直针带柱		一般公差 GENERAL TOLERANCE X.X ±0.30 X.XX ±0.20	
材料:		单位: MM		比例: 1:1	
制图:		审核:		日期: 2021.09.30	
变更内容 REVISION		日期 DATE		核准:	
P.C.B. LAYOUT		APPROVALBY		ANGIE ±1°	

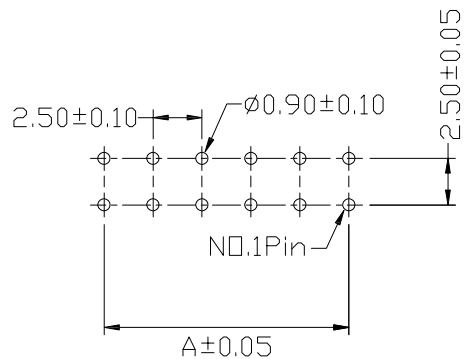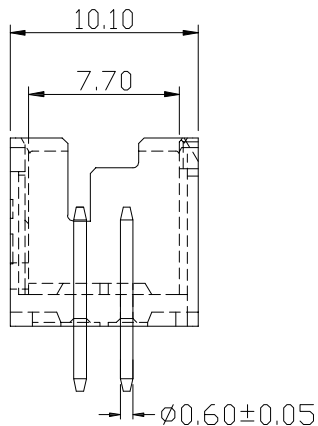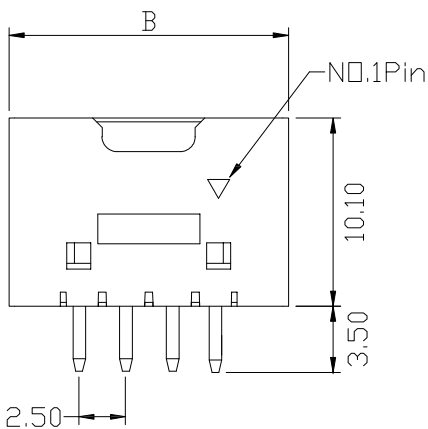P.C.B. LAYOUT

■ Specifications(规格):

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 3A AC / DC
- Withstanding voltage(耐压值): 1000V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤10mΩ
- After environmental testing(环境测试后): ≤20mΩ

Poles	Dimensions (mm)		
	A	B	C
08	7.50	15.00	11.10
10	10.00	17.50	13.60
12	12.50	20.00	16.10
14	15.00	22.50	18.60
16	17.50	25.00	21.10
18	20.00	27.50	23.60
20	22.50	30.00	26.10
22	25.00	32.50	28.60
24	27.00	35.00	31.10
26	30.00	37.50	33.60
30	35.00	42.50	36.10
32	37.50	45.00	38.60
34	40.00	47.50	41.10
36	42.50	50.00	43.60
40	47.50	55.00	46.10

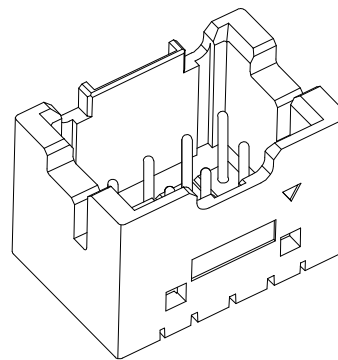








EST2522V-2*NPX-B	Nylon 46 UL 94V-0	Brass	Tin-Plated	1,000Pcs
PART NO	Material	Material(Pin)	Finish(Pin)	Q' ty/Bag



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

				料号PART NO: EST2522V-2*NPX-X	一般公差 GENERAL TOLERANCE X.X ±0.30 X.XX ±0.20 ANGLE ±1°	
				品名 TITLE: 2522-Wafer直针无柱		
				材料:	单位: MM	包装规格:
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	制图:	审核:	核准:
						比例: 1:1
						日期: 2021.09.30



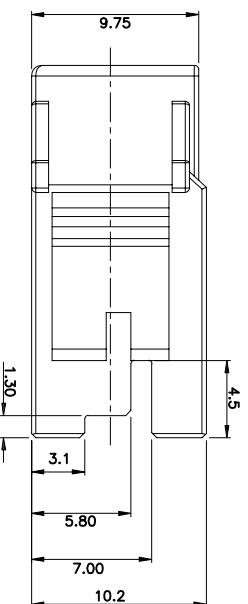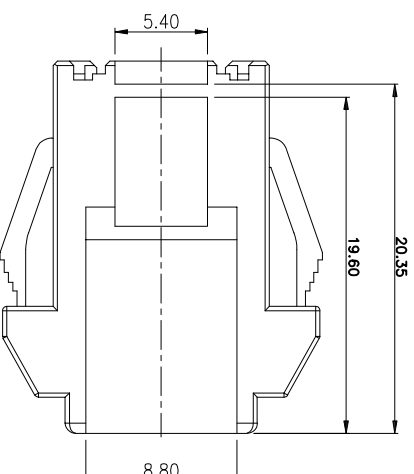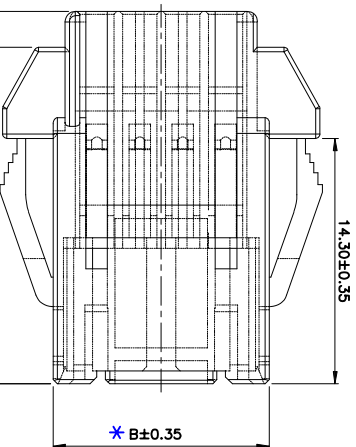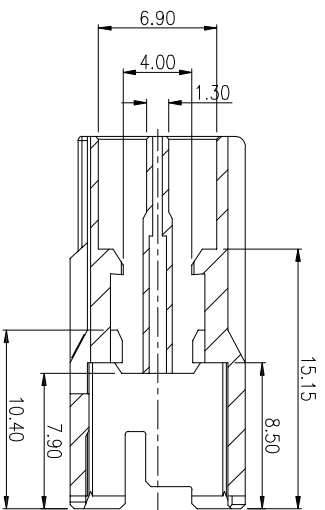

Dimensions (mm)	
Poles	
2x04	7.50
2x05	10.00
2x06	12.50
2x07	15.00
2x08	17.50
2x09	20.00
2x10	22.50
2x11	25.00
2x12	27.50
2x13	30.00
2x14	32.50
2x15	35.00
2x16	37.50
2x17	40.00
2x18	42.50
2x20	47.50

■ Specifications:
Voltage ratings: 250V AC/DC
Current rating: 3A AC/DC
Withstanding voltage: 1000V AC/minute
Temperature range: -25℃~+85℃
Insulation resistance: $\geq 1000M\Omega$
Contact resistance: $10 \leq 10m\Omega$
After environmental testing: $\leq 20m\Omega$



东莞市羿通实业有限公司
DONGGUAN EASTON ELECTRONIC Co., Ltd.

料号PART NO: EST2522H-2*NPX-E-G

品名 TITLE: 2522-H母 (带扣) 双排

材料: 单位: MM 包装规格:

日期版次: 日期: 2022.01.18

REVISION

变更内容

审核:

核准:

比例: 1:1

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°

6

5

4

3

2

1

YZ