

13790510059

5

4

3

2

1

F




E

D

C

B

A

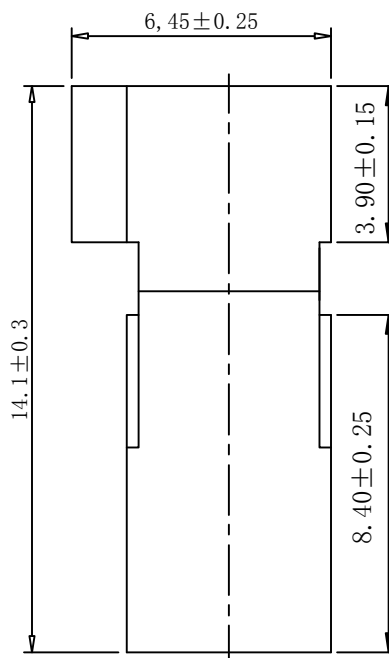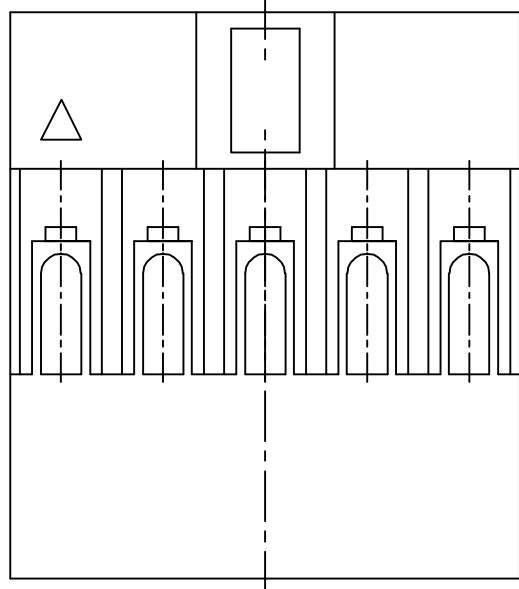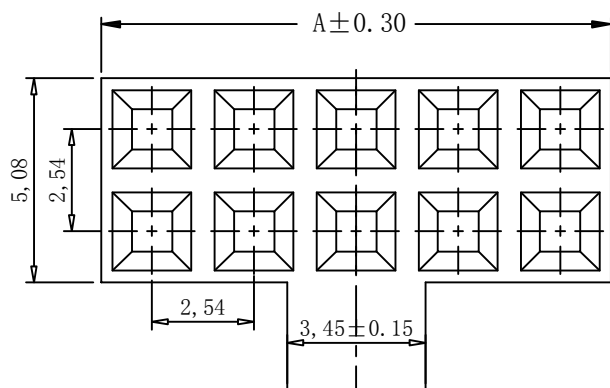

POLES	DIMENSION	POLES	DIMENSION
	A(mm)		A(mm)
2X2	5.08	2X14	35.56
2X3	7.62	2X15	38.10
2X4	10.16	2X16	40.64
2X5	12.70	2X17	43.18
2X6	15.24	2X18	45.72
2X7	17.78	2X19	48.26
2X8	20.32	2X20	50.80
2X9	22.86	2X21	53.34
2X10	25.40	2X22	55.88
2X11	27.94	2X23	58.42
2X12	30.48	2X24	60.96
2X13	33.02	2X25	63.50

EST2504 H - 1*NP X - B - X - HF-NK - X

↑ 羿通代码+间距

↑ PIN数
1示意单排
2示意双排

↑ X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

↑ X普通
B带扣
C刺破
2L示意两侧带锁扣
U超薄F防呆型
HV带高凸点
LC带低凸点
K卡槽
E有耳

↑ X公胶壳
G母胶壳

↑ NO MARK
HF示意无卤
NF普通含卤

↑ A灼热丝750
B灼热丝850
X普通料

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:3A AC/DC;
- Withstanding Voltage:800V AC/minute
- Insulatin resistance:1000MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:20mΩ Max
- Applicable wire:AWG#22~#28

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2504H-2*NPB-LC

品名 TITLE: DB2.54-H(双排低凸)

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2023. 3. 17

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°



XJS