
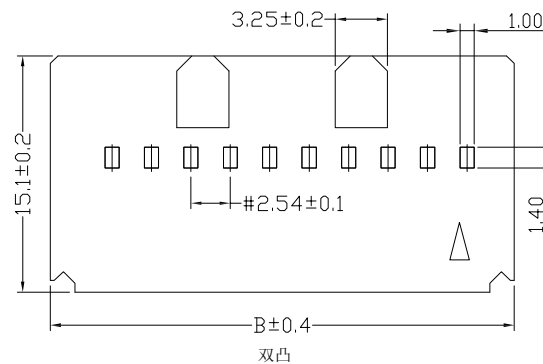


H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

Poles	Dimensions (mm)	
	A	B
2	2.54	9.54
3	5.08	12.08
4	7.62	14.62
5	10.16	17.16
6	12.70	19.70
7	15.24	22.24
8	17.78	24.78
9	20.32	27.32
10	22.86	29.86
11	25.40	32.40
12	27.94	34.94
13	30.48	37.48
14	33.02	40.02
15	35.56	42.56
16	38.10	45.10
17	40.64	47.64
18	43.18	50.18
19	45.72	52.72
20	48.26	55.26
21	50.80	57.60
22	53.34	60.34
23	55.88	62.88
24	58.42	65.42
25	60.96	67.96
26	63.50	70.50
27	66.04	73.04
28	68.58	75.58
29	71.12	78.12
30	73.66	80.66
31	76.20	83.20
32	78.74	85.74

Contact resistance: $\leq 0.02 \Omega$

日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	AI

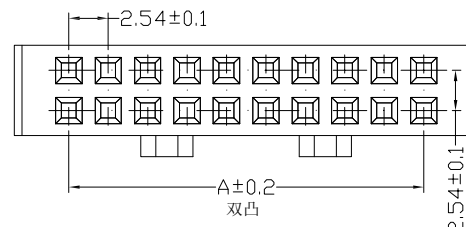

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

2022/07/22

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
X.XXX ±0.15
ANGLE ±1°

