

1379.510059


5

4



3

2

1

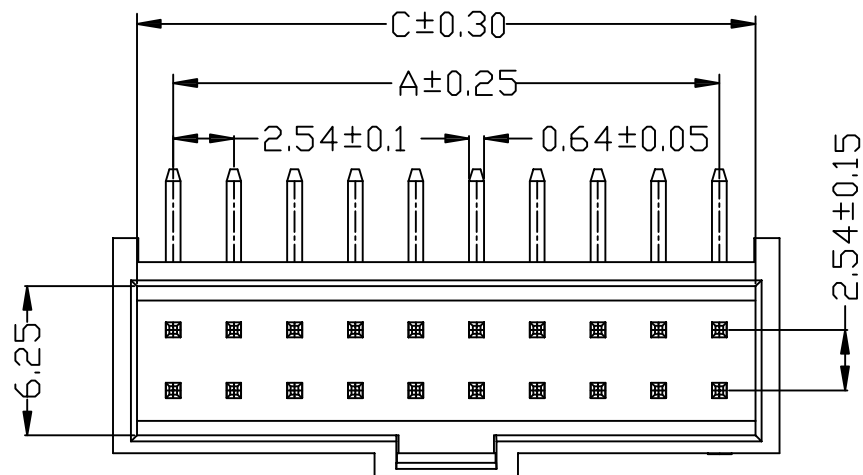

NO.	A	B	C	NO.	A	B	C
2*3P	5.08	10.12	8.02	2*21P	50.80	55.84	53.74
2*4P	7.62	12.66	10.56	2*22P	53.34	58.38	56.28
2*5P	10.16	15.20	13.10	2*23P	55.88	60.92	58.82
2*6P	12.70	17.74	15.64	2*24P	58.42	63.46	61.36
2*7P	15.24	20.28	18.18	2*25P	60.96	66.00	63.90
2*8P	17.78	22.82	20.72	2*26P	63.50	68.54	66.44
2*9P	20.32	25.36	23.26	2*27P	66.04	71.08	68.98
2*10P	22.86	27.90	25.80	2*28P	68.58	73.62	71.52
2*11P	25.40	30.44	28.34	2*29P	71.12	76.16	74.06
2*12P	27.94	32.98	30.88	2*30P	73.66	78.70	76.60
2*13P	30.48	35.52	33.42	2*31P	76.20	81.24	79.14
2*14P	33.02	38.06	35.96	2*32P	78.74	83.78	81.68
2*15P	35.56	40.60	38.50				
2*16P	38.10	43.14	41.05				
2*17P	40.64	45.68	43.58				
2*18P	43.18	48.22	46.12				
2*19P	45.72	50.76	48.66				
2*20P	48.26	53.30	51.20				

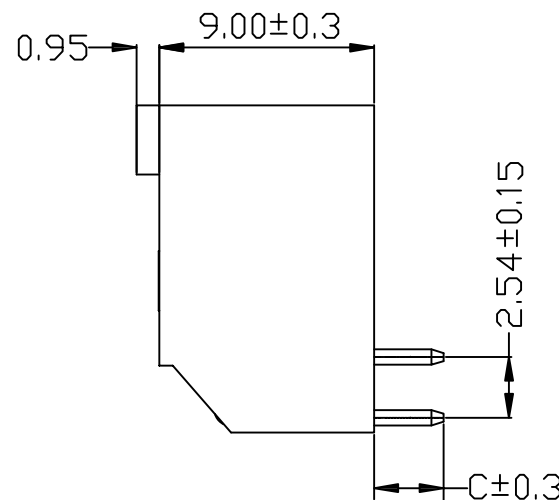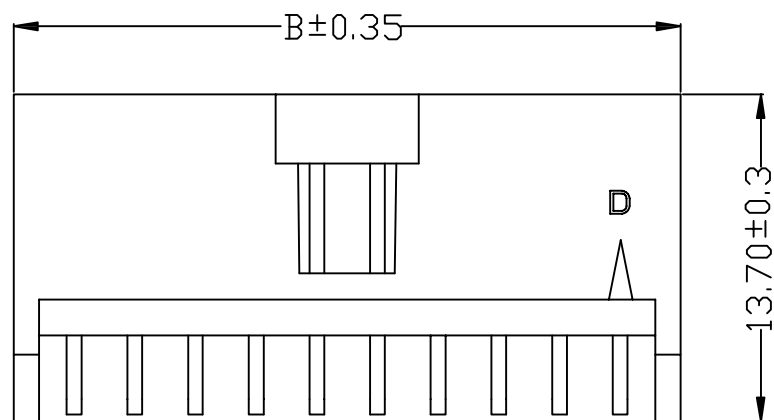

DIM C
2.50mm
2.90mm

Specifications

Voltage rating:250V AC/DC

Current Rating:3A AC/DC

Withstanding Voltage:1500V AC/Minute

Insulation Range:1000mΩ Min

Temperature Range:-25°C~+85°C

Contact Resistance:20mΩ Max

Pin material:Brass/Gold-flash or tin-plated

Material:PBT, UL94V-0

Q'ty Bag:1000PCS



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST2542WR-2*NPX-H

品名 TITLE: 90119-2弯针

材料:

单位:

MM

包装规格:

比例:

1:1

制图:


审核:

核准:

日期:

2025. 9. 17

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.20
ANGLE ±1°



LY

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY