
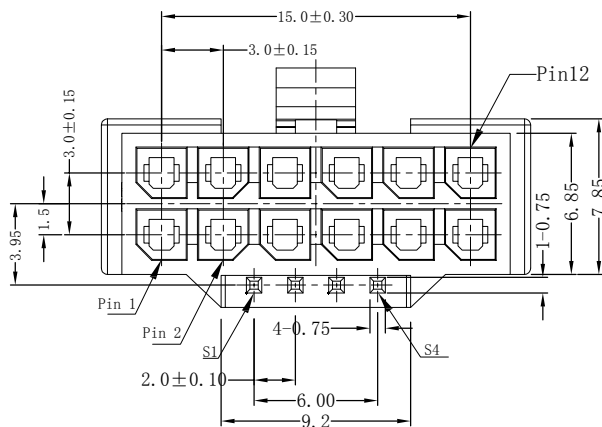
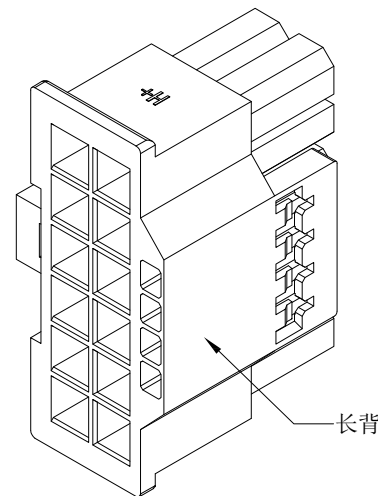

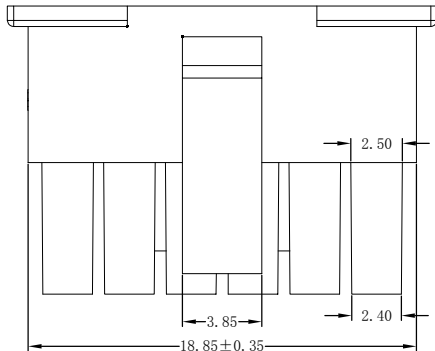



Cavity NO. → 1

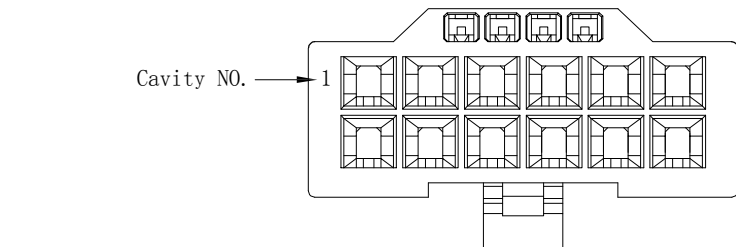

EST3002 H - 2*NP B - B - X - HF-NK - X

↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑

羿通代码+间距 PIN数 X本色 X公散壳 即示意无洞 即示意无洞 A约热丝T50

1示意单排 2示意双排 B黑色 B带扣 C刺破 2L示意两侧带锁扣 U超薄F防呆型 HV带高凸点 LC带低凸点 K卡槽 E有耳

B示意胶壳, H后无数字默认材质V0 H后带数字2示意材质V2

NO MARK X普通料

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 5A, AC, DC
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ min
- Temperature range: -25° C~+85° C

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3002H-2*NPB-B-X

品名 TITLE: MX3.0-H公长背(双排)

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2024. 01. 31

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°

