

13790510059




5

4

3

2

1

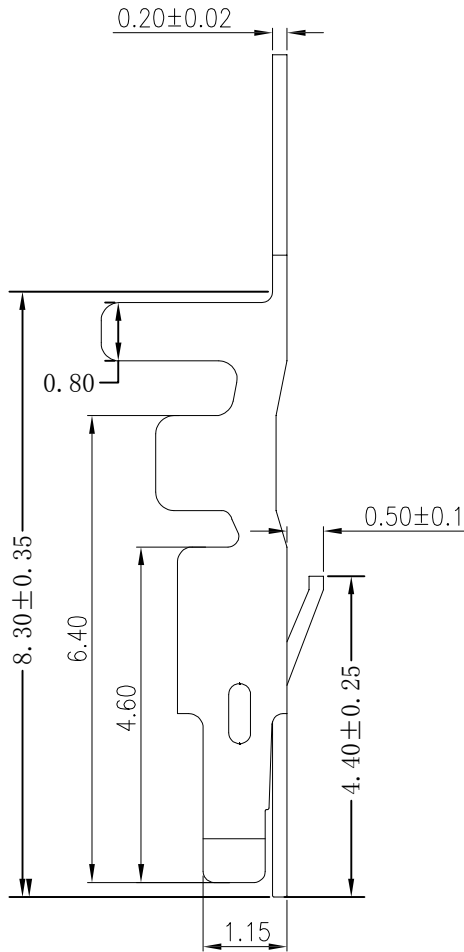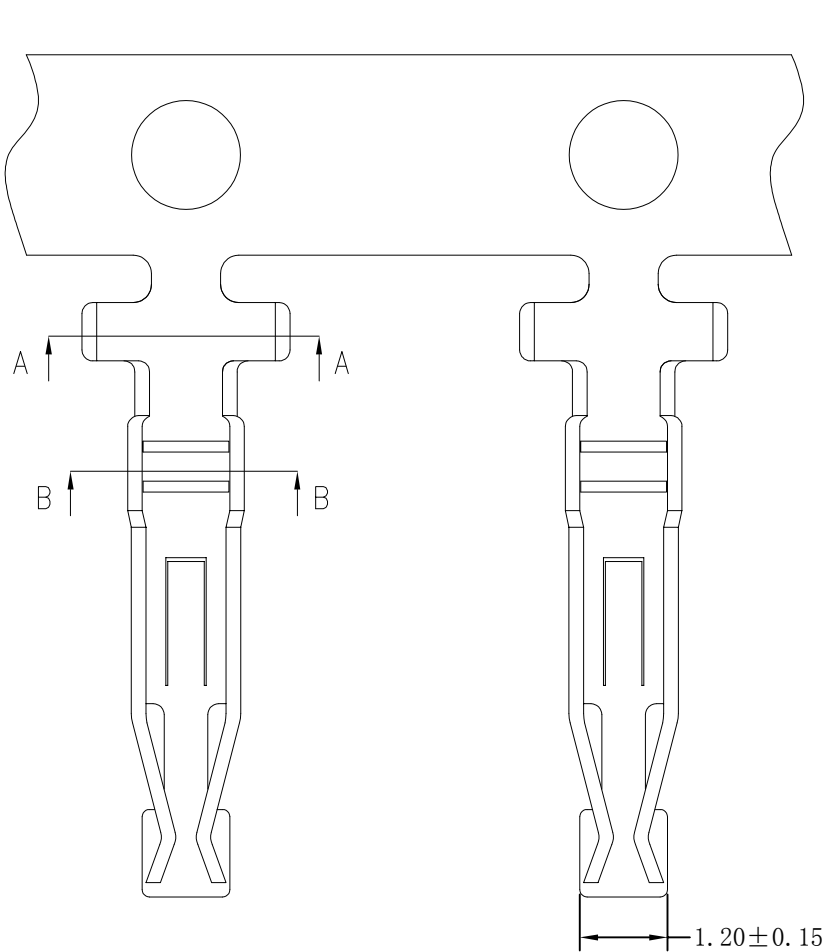

A-A

NOTES:

1. Material: Phosphor Bronze, T=0.20mm
2. Finish: Nickel 20u"~60u" Over All.
T-Tin 80u"~120u" Over Nickel
G-Gold Flash(0.8u") Over Nickel
3. Applicable Wire Range: AWG#22~#28
4. Insulation O.D.: 1.60mm (Max.)
5. Current Rating: 5A AC,DC
6. Voltage Rating: 250V AC,DC
7. Temperature Rang: -25°C~+85°C
8. Contact Resistance: 10mΩ Max
9. Insulation Resistance: 1000MΩ Min
10. Withstanding Voltage: 1500V AC/minute

EST3501 T P X - 2 X- X

↑ 羿通代码+间距

↑ T示意端子

X普通脚
H高脚
E增高脚

X普通
L长
S短

X公端
G母端

0素材
2镀锡先冲后镀
3镀锡先镀后冲
5G、15G示意镀金5U"或15U",
1G示意镀金1U"

P磷铜
B黄铜
E合金铜



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3501TPX-2X-G

品名 TITLE: 3.51-T(母)

材料:

单位:

MM

包装规格:

比例:

1:1

制图:

审核:

核准:

日期:

2023. 2. 15


日期版次
REVISION

日期
DATE



变更内容
DESCRIPTION

核 准
APPROVALBY

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°



XR

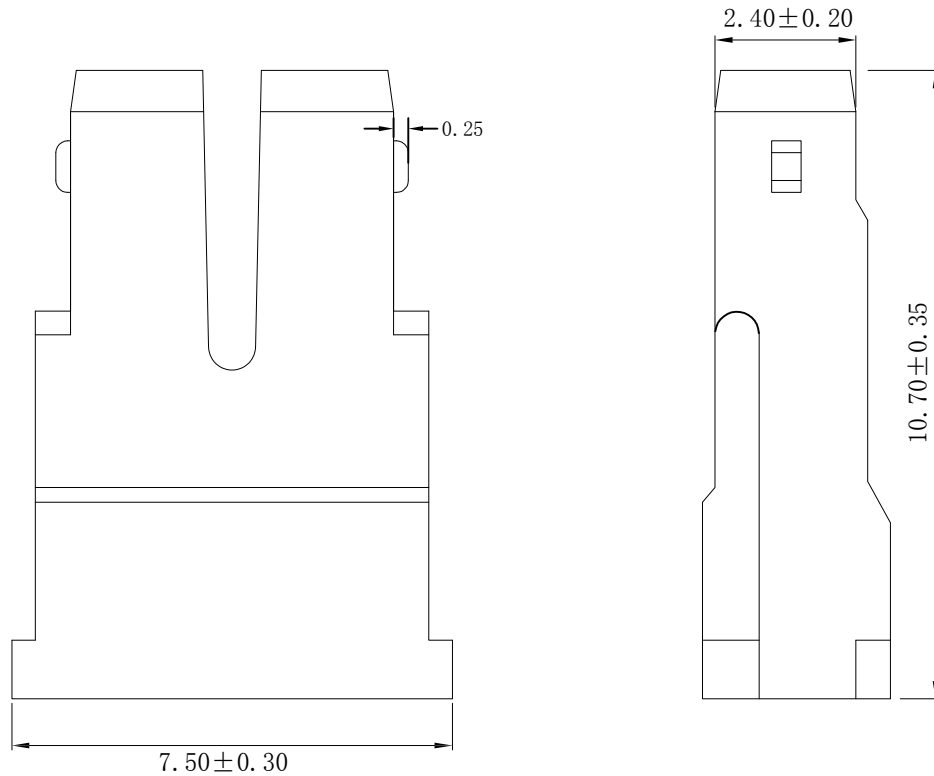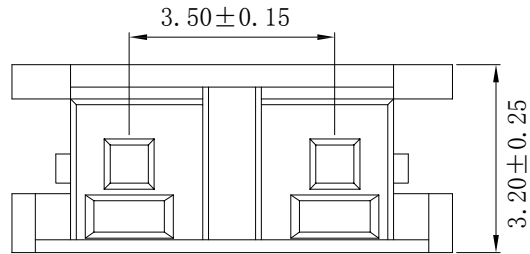

NOTES:

1. Material: Nylon66, UL94V-0
2. Color: Natural(White)
3. Current Rating: 5A AC,DC
4. Voltage Rating: 250V AC,DC
5. Temperature Rang: -25°C~+85°C
6. Contact Resistance: 10mΩ Max
7. Insulation Resistance: 1000MΩ Min
8. Withstanding Voltage: 1500V AC/minute



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3501H-1*2PX-X

品名 TITLE: 3.5-2P胶壳

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2020. 4. 19

日期版次
REVISION

日期
DATE

变更内容
DESCRIPTION

核 准
APPROVALBY

一般公差
GENERAL TOLERANCE
X. X ±0.25
X. XX ±0.20
ANGLE ±1°

