

13790510059



5

4


3

2

1

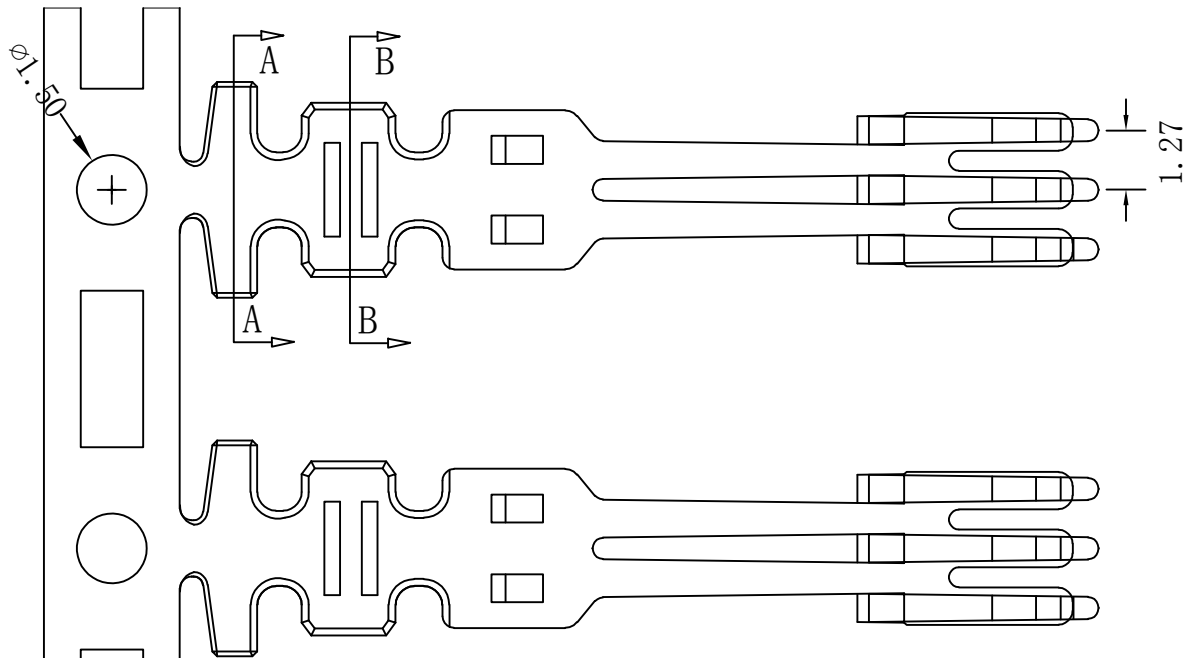

A-A



B-B

此处为镀金部位

EST3800 T B X - 2 L - X

羿通代码+间距

T示意端子

X普通脚
H高脚
E增高型脚X公端
G母端
C示意90°
S示意180°P磷铜
B黄铜
E合金铜0素材
2镀锡先冲后镀
3镀锡先镀后冲
4镀全镍(镀后冲)
4.2镀全镍先冲后镀
5G、15G示意镀金5U"或15U", 16示意镀金1U"

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 8A AC/DC;
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 30mΩ Max
- Wire gauge: 18+18#

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST3800TBX-2L-X

品名 TITLE: SATA-T长

材料:

单位:

MM

包装规格: 6000PCS/卷

比例:

1:1

制图:

审核:

核准:

日期:

2024. 9. 12

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°

版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVAL BY

6

5

4

3

2

1

ZX