
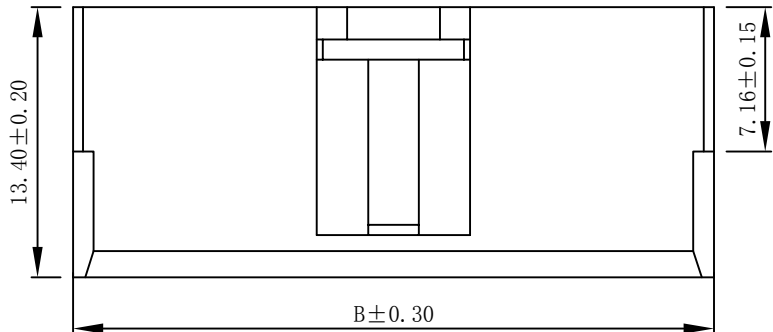
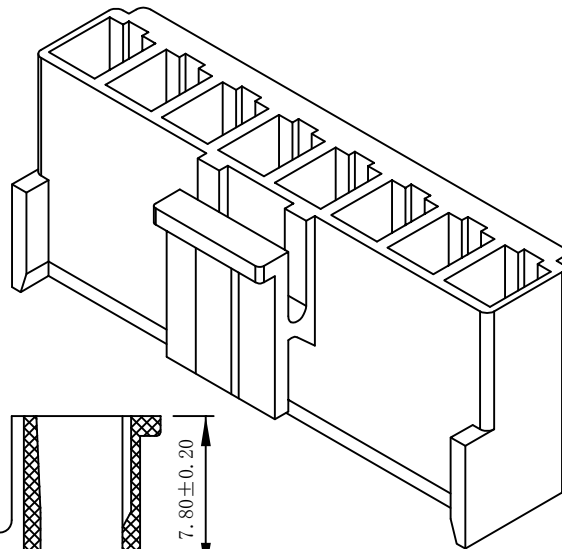


PART NO	Dimensions		
	A	B	C
1*2	3.96	8.02	3.65
1*3	7.92	11.98	7.60
1*4	11.88	15.94	
1*5	15.84	19.90	
1*6	19.80	23.86	
1*7	23.76	27.82	
1*8	27.72	31.78	
1*9	31.68	35.74	
1*10	35.64	39.70	
1*11	39.60	43.66	
1*12	43.56	47.62	
1*13	47.52	51.58	
1*14	51.48	55.54	
1*15	55.44	59.50	

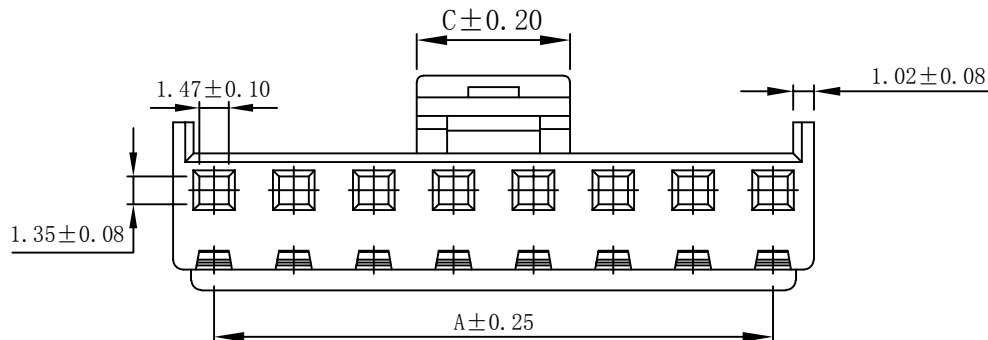

EST3960 H - 1 * NP X - B - X - HF-NK - X

↑
弄通代码+间距

X 管脚
B 箔包
C 铜架
X 中包
R 红色
L 蓝色
Y 黄色
G 绿色
C 透明

X 公壳亮
G 母壳亮

NO MARK

A内热丝750
B内热丝850
X普通料

HP示意无卤
NP普通含卤

PIN数

1 示意单排
2 示意双排

H 示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

Applicable wire:AWG#18~#22
Voltage rating: 250V DC/AC (rms)
Current rating:10A
Withstand voltage: 800V AC(rms)
Working Temperature:-25℃+85℃
Insulation resistance:≥1000MΩ
Contact resistance:≤0.02Ω

版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3960H-1*NPX-B-X

品名 TITLE: VH3.96-H公

材料: PA66

单位: M

包装规格: 1K / 包


比例: 1:1

制图:

审核:

核准:

日期:



一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20

EST