
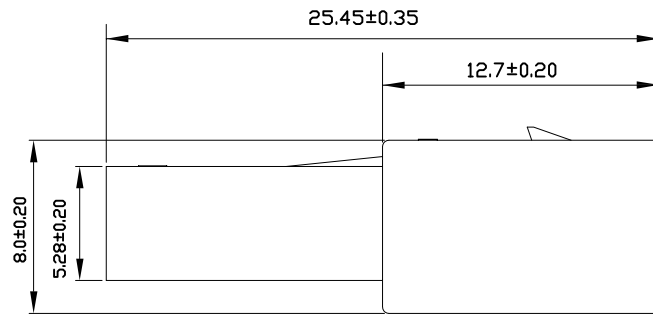
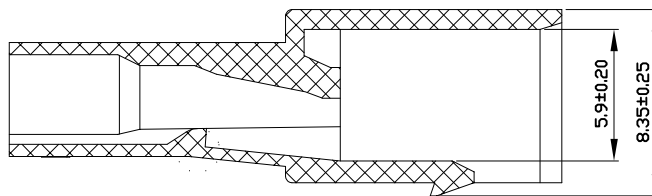

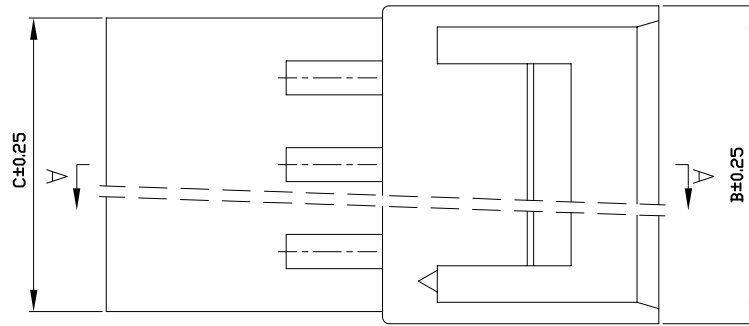


线 数	尺 寸		
	A	B	C
1*2	3.96	10.64	9.56
1*3	7.92	14.60	13.52
1*4	11.88	18.56	17.48
1*5	15.84	22.52	21.44
1*6	19.80	26.48	25.40
1*7	23.76	30.44	29.36
1*8	27.72	34.40	33.32
1*9	31.68	38.36	37.28
1*10	35.64	42.32	41.24
1*11	39.60	46.28	45.20
1*12	43.56	50.24	49.16
1*13	47.52	54.20	53.12
1*14	51.48	58.16	57.08
1*15	55.44	62.12	61.04
1*16	59.40	66.08	65.00



剖面 A-A

EST3960 H - 1*NP X - B - G - HF-NK - X

↑ 羿通代码+间距

↑ PIN数

↑ X 本色
B 黑色
R 红色
L 蓝色
Y 黄色
G 绿色
C 透明

↑ 1 示意单排
2 示意双排

↑ X 公胶壳
G 母胶壳

↑ 2L 示 断 两侧带锁扣
U 断 断 防呆型
HV 带 高 凸点
LC 带 低 凸点
K 卡扣
E 有耳

↑ NO MARK

↑ A 灼热丝750
B 灼热丝850
X 普通料

↑ HF 示意无卤
NF 普通含卤

H 示意胶壳,
H 后无数字默认材质V0
H 后带数字2示意材质V2

SPECIFICATIONS

Applicable wire:AWG#18~#22

Voltage rating: 250V DC/AC (rms)

Current rating:10A

Withstand voltage: 800V AC(rms)

Working Temperature:-25℃+85℃

Insulation resistance:≥1000MΩ

Contact resistance:≤0.02Ω



DGEASTOM

东莞市羿通实业有限公司

DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3960H-1*NPX-B-G

品名 TITLE: VH3.96-H(母)

材料: PA66

单位: MM

包装规格: 1K/包

比例: 1:1


制图: 胡宗显

审核: 余详富

核准: 李海平

日期: 2022/08/09

一般公差
GENERAL TOLERANCE
X.X ±0.25
X.XX ±0.15
ANGLE ±1°



日期版次 REVISION	日 期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY