
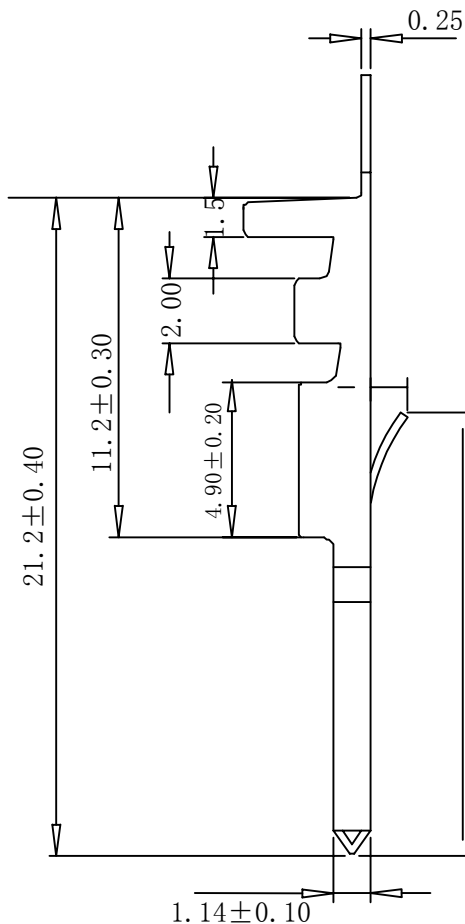
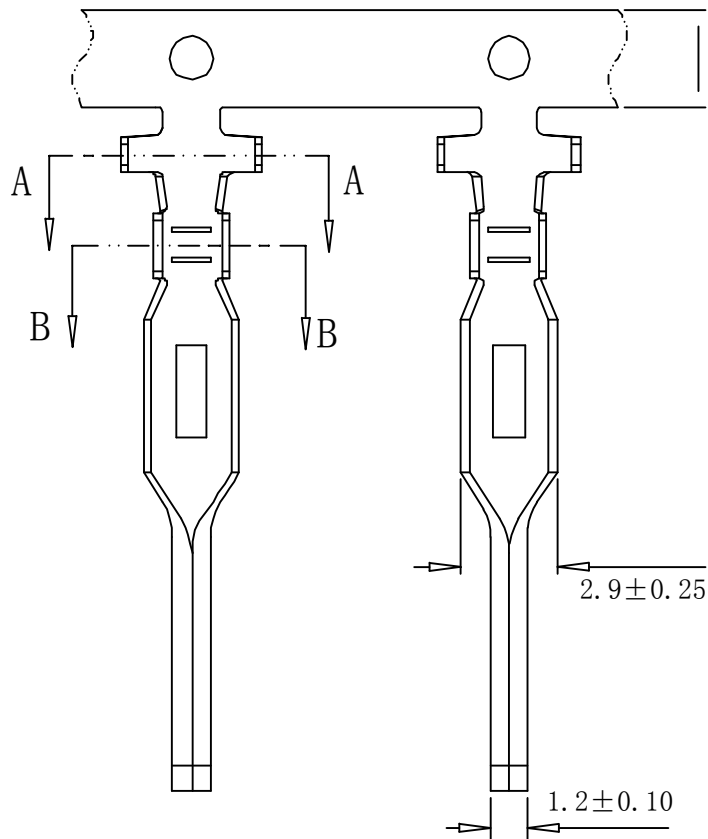


SEC A--A



SEC B--B

EST3960 T B X - 2 X- X

↑
羿通代码+间距

↑
T示意端子

↑
X普通脚
H高脚
E增高型脚

↑
X普通
L长
S短
U超薄

↑
X公端
G母端
C示意90°
S示意180°

0 素材
2 镀锡先冲后镀
3 镀锡先镀后冲
4 镀全镍(镀后冲)
4.2 镀全镍先冲后镀
5G、15G 示意镀金5U"或15U",
1G 示意镀金1U"



DGEASTOM

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3960TBX-2X-X

品名 TITLE: VH3.96-T(公)

材料: C5191/C2680

单位: MM

包装规格: 4K/卷

比例: 1:1


制图:

审核:

核准:

日期: 2022/08/08

一般公差
GENERAL TOLERANCE
X. X ±0.25
X. XX ±0.20
ANGLE ±1°



XJ

SPECIFICATIONS:

- Current rating:10A AC,DC
- Voltage rating:250V AC,DC;
- Temperature range:-40℃~+105℃;
- Contact resistance:10mΩ Max;
- Insulation resistance:1000MΩ Min;
- Withstanding voltage:1500V AC/Minute
- Wire range:AWG#18-#22

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY