

13790510059



5

4

3

2

1

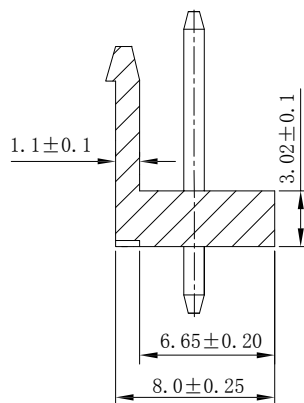
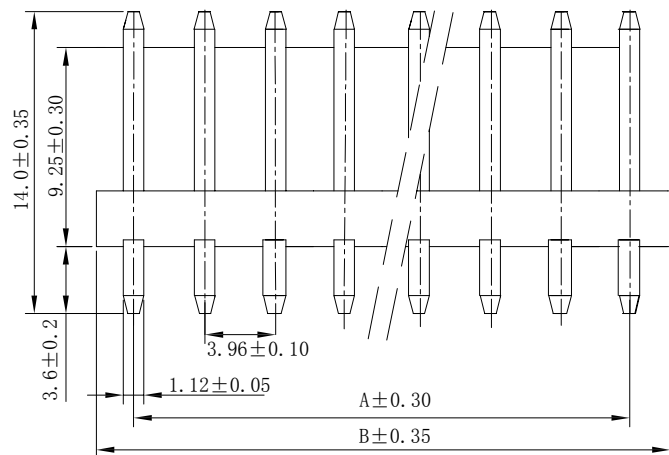


EST3960 W V - 1*NP X - X - X X - NK-HF

↑ 羿通代码+间距 ↑ PIN数 ↑ X本色 ↑ X普通 ↑ X X ↑ G为PIN针镀金 ↑ HF无卤
1单排 2双排 B黑色 B带扣 S为PIN针镀锡 NF普通含卤
L蓝色 P组合排针 P组合排母 H高弯 K打脚 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66
Y黄色 R组合排针 D防呆柱 2示意有柱 L0带定位无K NK为NO MARK MK为有MARK
G绿色 RG高弯 KLO带定位打K

W示意针座
W后无0默认材质为V0
W后带2示意V2

P NO.	Dimensions	
	A	B
2P	3.96	7.9
3P	7.92	11.7
4P	11.88	15.7
5P	15.84	19.6
6P	19.80	23.6
7P	23.76	27.6
8P	27.72	31.5
9P	31.68	35.5
10P	35.64	39.5

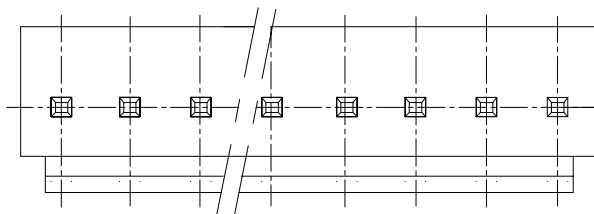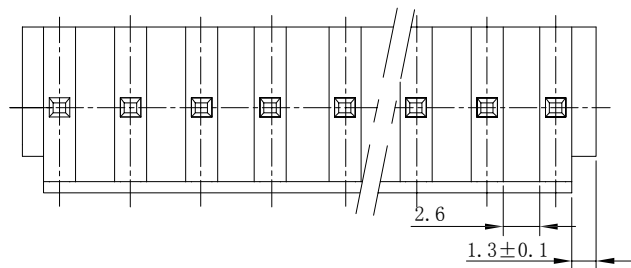

■ SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 8A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 20mΩ Max
- Insulation Material: NYLON UL94-V0/V2



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST3960WV-1*NPX-X

品名 TITLE: VH3.96直针

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2022/8/8

一般公差
GENERAL TOLERANCE
X. X ±0.35
X. XX ±0.20
ANGLE ±1°



KL