

13790510059

5



4

3

2

1

孔数	尺寸 (mm)	
	A	B
2	3.96	8.0
3	7.92	12.0
4	11.88	16.0
5	15.84	20.0
6	19.80	24.0
7	23.76	28.0
8	27.72	32.0
9	31.68	36.0
10	35.64	40.0
11	39.6	44.0
12	43.56	48.0

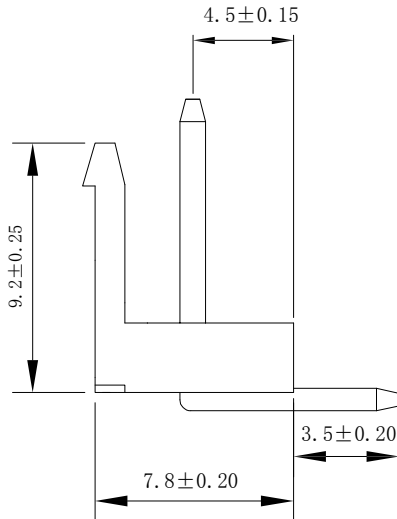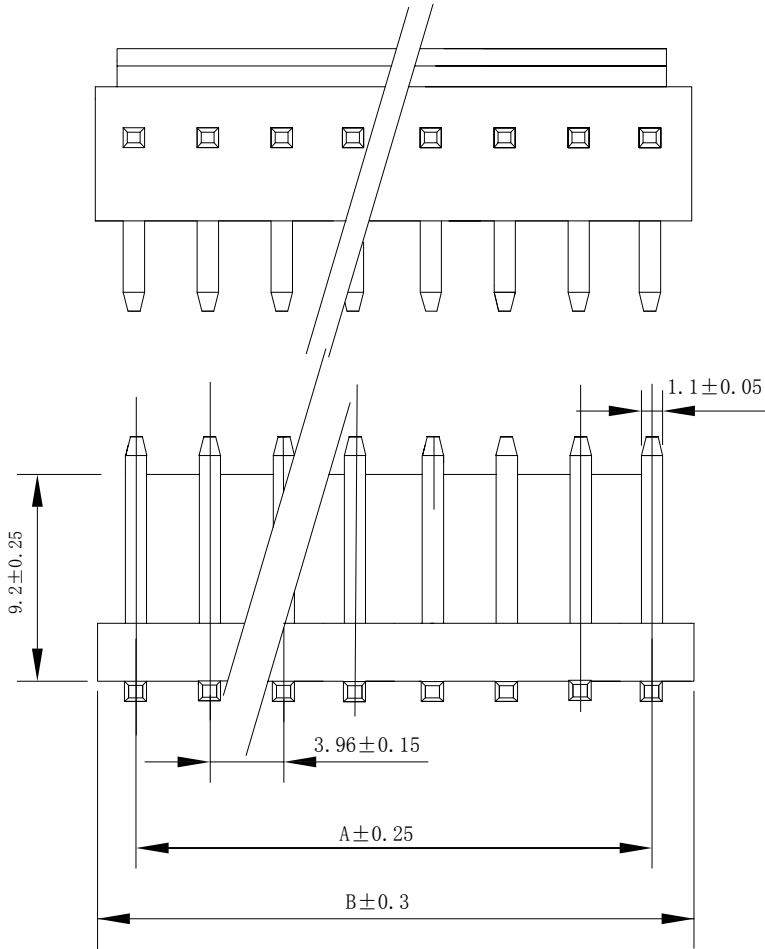

EST3960 W R - 1*NP X - X - X X - NK-HF

↑ 弄通代码+间距

↑ PIN数 X本色 X普通
1单排 B黑色 B带扣
2双排 R红色 U超薄
Y蓝色 PH组合排针
G黄色 FH组合排母
绿色 H高弯
K打脚K
D防呆型
2示意有柱
LO带定位无K
KLO带定位打K

↑ V示意180°直针, VS立式
R示意90°弯针, RS卧式
RG高弯

↑ G为PIN针镀金
S为PIN针镀锡

↑ NK为NO MARK
MK为有MARK

↑ 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66

↑ HF无卤
NF普通含卤

W示意针座
W后无0默认材质为V0
W后带2示意V2

SPECIFICATIONS

- Voltage rating:250V AC/DC;
- Current rating:8A AC/DC;
- Withstanding Voltage:1500V AC/minute
- Insulatin resistance:1000MΩ Min
- Temperature range:-25℃~+85℃
- Contact resistance:20mΩ Max
- Insulation Material:NYLON UL94-V0/V2

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3960WR-1*NPX-X

品名 TITLE: VH3.96弯针

材料: PA66

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2022/8/8

一般公差
GENERAL TOLERANCE
X. X ±0.25
X. XX ±0.20
ANGLE ±1°



KL