

13790510059

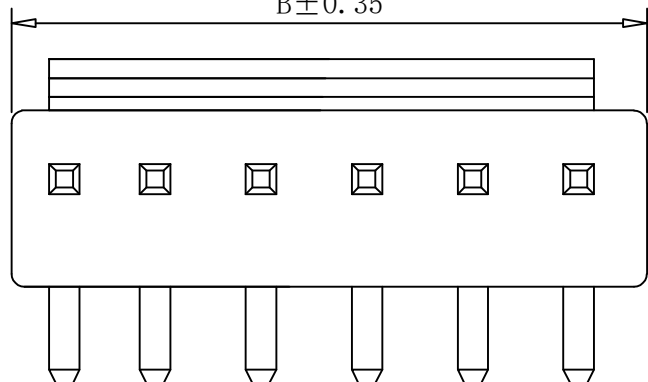
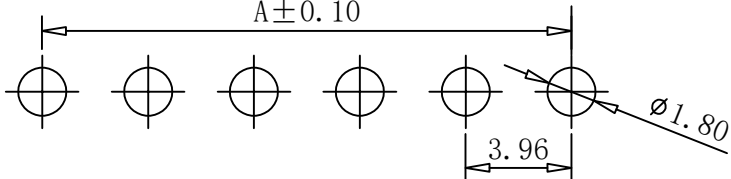
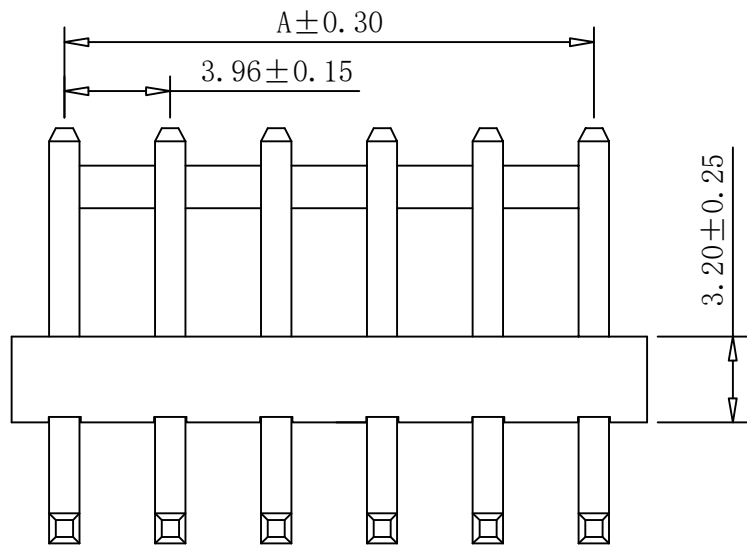
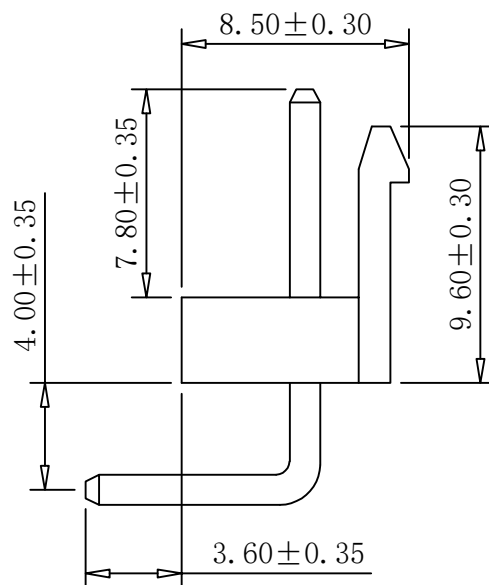
5

4

3

2

1

 $B \pm 0.35$  $A \pm 0.10$  $A \pm 0.30$ 3.96 ± 0.15  8.50 ± 0.30 

Poles	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 7A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25°C ~ +85°C
- Contact resistance: 20mΩ Max
- Insulation Material: PA66 UL94-V0+C2680 TIN



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号 PART NO: EST3960WRG-1*NPX-X

品名 TITLE: VH3.96弯针高弯

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2025/09/05

一般公差
GENERAL TOLERANCE
X.X ±0.35
X.XX ±0.20
ANGLE ±1°

版次
REVISION日期
DATE变更内容
DESCRIPTION核准
APPROVAL BY

QX