

13790510059




5

4



3

2

1

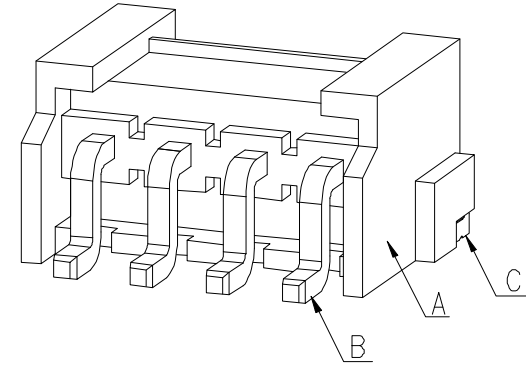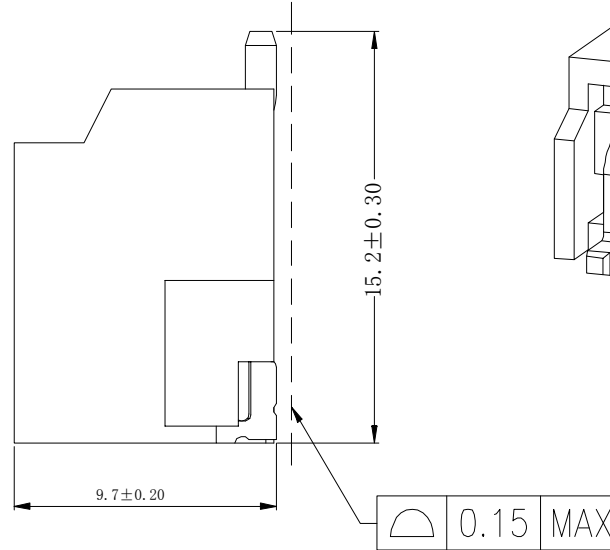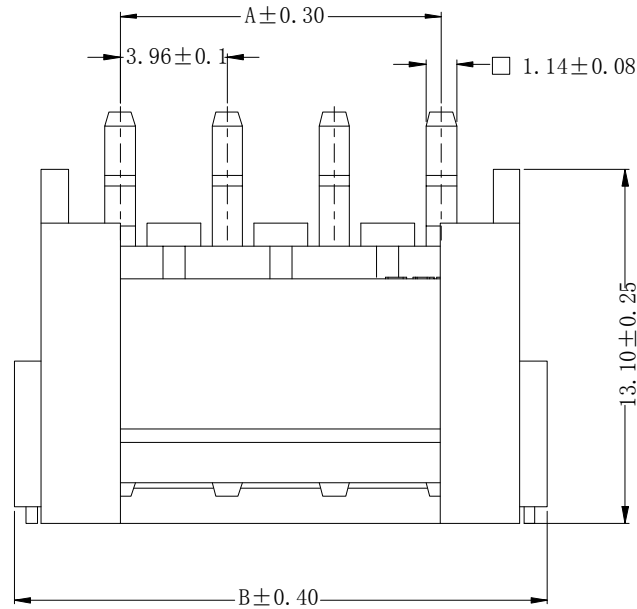

Circuits	Dimensions (mm)		
	DIM. A	DIM. B	DIM. C
02	3.96	11.88	8.60
03	7.92	15.84	12.56
04	11.88	19.80	16.52
05	15.84	23.76	20.48
06	19.80	27.72	24.44
07	23.76	31.68	28.40
08	27.72	35.64	32.36
09	31.68	39.60	36.32
10	35.64	43.56	40.28
11	39.60	47.52	44.24
12	43.56	51.48	48.20
13	47.52	55.44	52.16
14	51.48	59.40	56.12
15	55.44	63.36	60.08
16	59.40	67.32	64.04

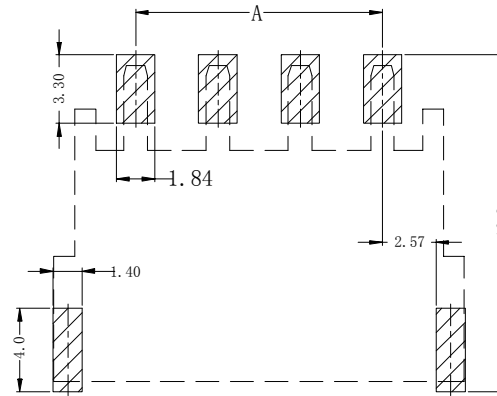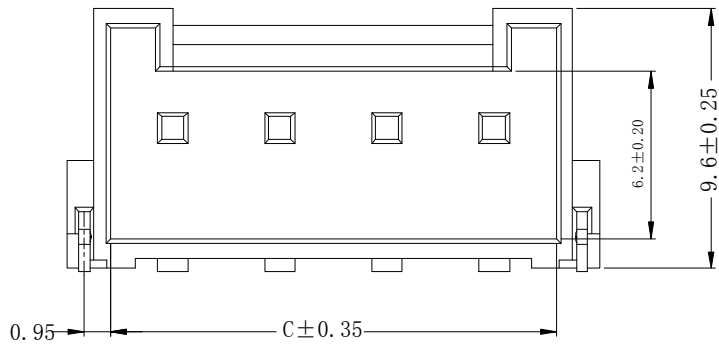

印刷板安装孔图

P.C.B Mounting pattern dimension

EST3960 W RS - 1*NP X -X - X X - NK-HF

↑ 羿通代码+间距 ↑ PIN数 ↑ X本色 ↑ X普通 ↑ G为PIN针镀金 ↑ HF无卤

↑ 1单排 ↑ B黑色 ↑ U超薄 ↑ PH组合排针 ↑ S为PIN针镀锡 ↑ NF普通含卤

↑ 2双排 ↑ R红色 ↑ PH组合排母 ↑ H高弯 ↑ NK为NO MARK ↑ MK为有MARK

↑ L蓝色 ↑ K打脚K ↑ D防呆型 ↑ 1为PPS, 2为PBT, 3为LCP, 4为ABS, 5为PA6T, 6为PA66

↑ Y黄色 ↑ 2示意有柱 ↑ LO带定位无K ↑

↑ G绿色 ↑ RG高弯 ↑ V示意180°直针, VS立式 ↑ R示意90°弯针, RS卧式 ↑ KLO带定位打K

W示意针座
W后无0默认材质为V0
W后带2示意V2

SPECIFICATIONS

- Poles: 02 To 16
- Voltage rating: 250V AC/DC;
- Current rating: 7A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃ ~ +85℃
- Contact resistance: 20mΩ Max



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3960WRS-1*NPX-X

品名 TITLE: VH3.96贴片

材料:

单位: MM

包装规格:

比例: 1:1

制图:


审核:

核准:

日期: 2022.8.10

日期版次
REVISION日期
DATE变更内容
DESCRIPTION核 准
APPROVALBY

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.20
ANGLE ±1°



ZT