

技术参数: SPECIFICATIONS

■适用线规: AWG#18~#24

Applicable wire: AWG#18~#24

■额定电压: 250V DC/AC (有效值)

Voltage rating: 250V DC/AC (rms)

■额定电流: 2.5-1.0A


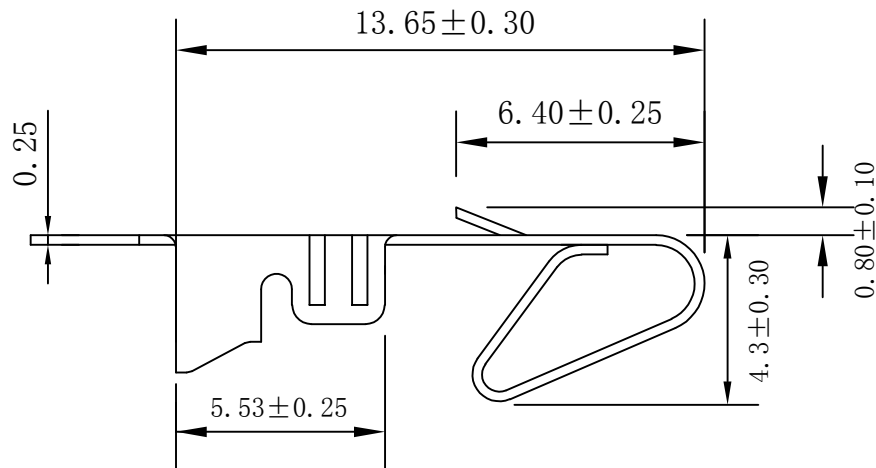
Current rating: 2.5-1.0A

■耐压值: 800V AC(有效值)


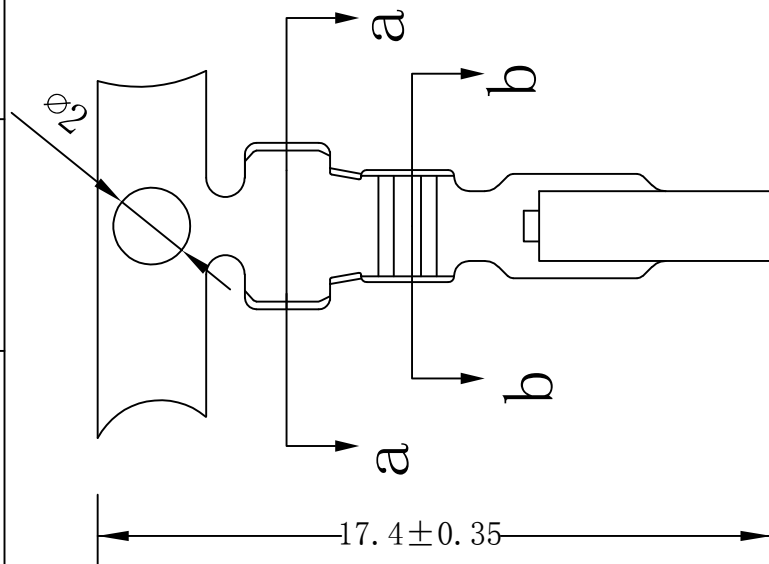
Withstand voltage: 800V AC(rms)

■工作温度: -25℃~+85℃

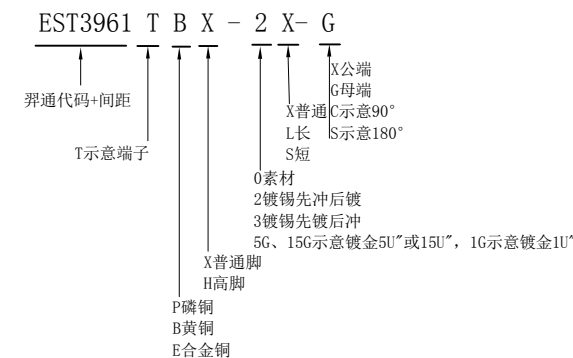
Working Temperature: -25℃+85℃

■绝缘电阻: $\geq 1000M\Omega$ Insulation resistance: $\geq 1000M\Omega$ ■接触电阻: $\leq 0.02\Omega$ Contact resistance: $\leq 0.02\Omega$ 

a-a



b-b

东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST3961TBX-2X-G

品名 TITLE: MX3. 96-T

材料: C2680

单位: MM

包装规格: 5K/卷

比例: 1:1

制图:

审核:

核准:

日期: 2022/08/11

一般公差
GENERAL TOLERANCE
X. X ± 0.30
X. XX ± 0.20
ANGLE $\pm 1^\circ$ 