

13790510059




5

4

3

2

1

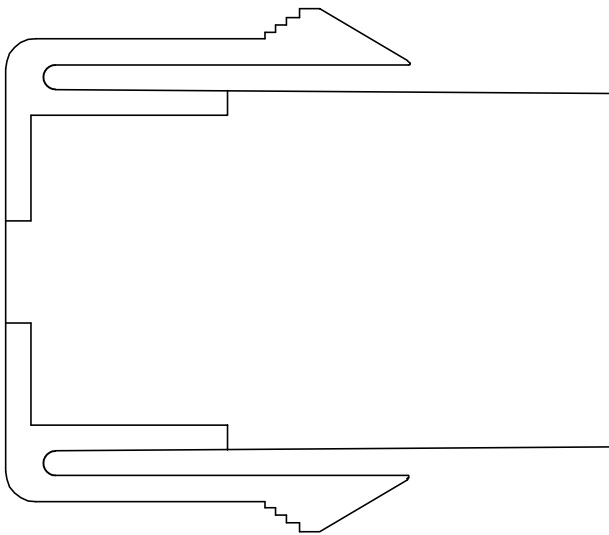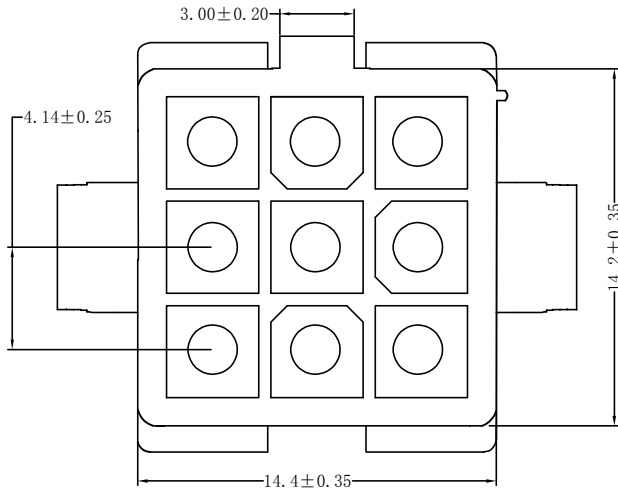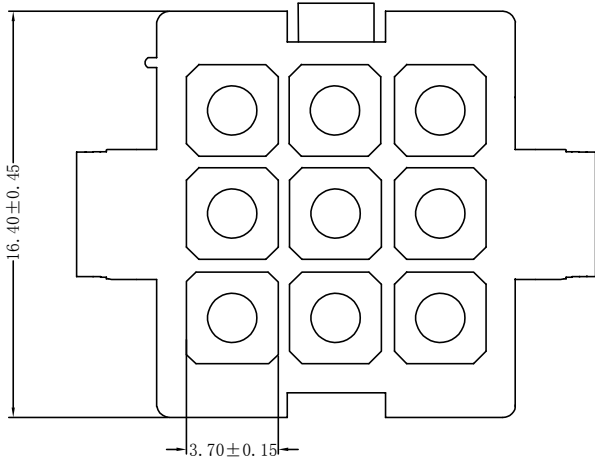

EST1001 H - 2*3P X - E - G - HF-NK - X

↑ 羿通代码+间距

↑ PIN数
1示意单排
2示意双排

↑ X本色
B黑色
R红色
L蓝色
Y黄色
G绿色
C透明

↑ X胶壳
B带扣
C刺破
L示意LOCK TYPE
U超薄防呆型
HV带高凸点
LC带低凸点,
K卡槽
E有耳

↑ NO MARK

↑ HF示意无卤
NF普通含卤

↑ A灼热丝750
B灼热丝850
X普通料

SPECIFICATIONS

- Rated voltage: 600V AC/DC;
- Rated Current: 5A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 30mΩ Max


日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: ESTK1001H-3*3PX-E-G			
品名 TITLE: 1.0空接-H母(3*3) 有耳			
材料:	单位: MM	包装规格:	比例: 1:1
制图:	审核:	核准:	日期: 2023. 2. 8

一般公差 GENERAL TOLERANCE	
X. X	±0.30
X. XX	±0.25
ANGLE	±1°



6

5

4

3

2

1

HZ