


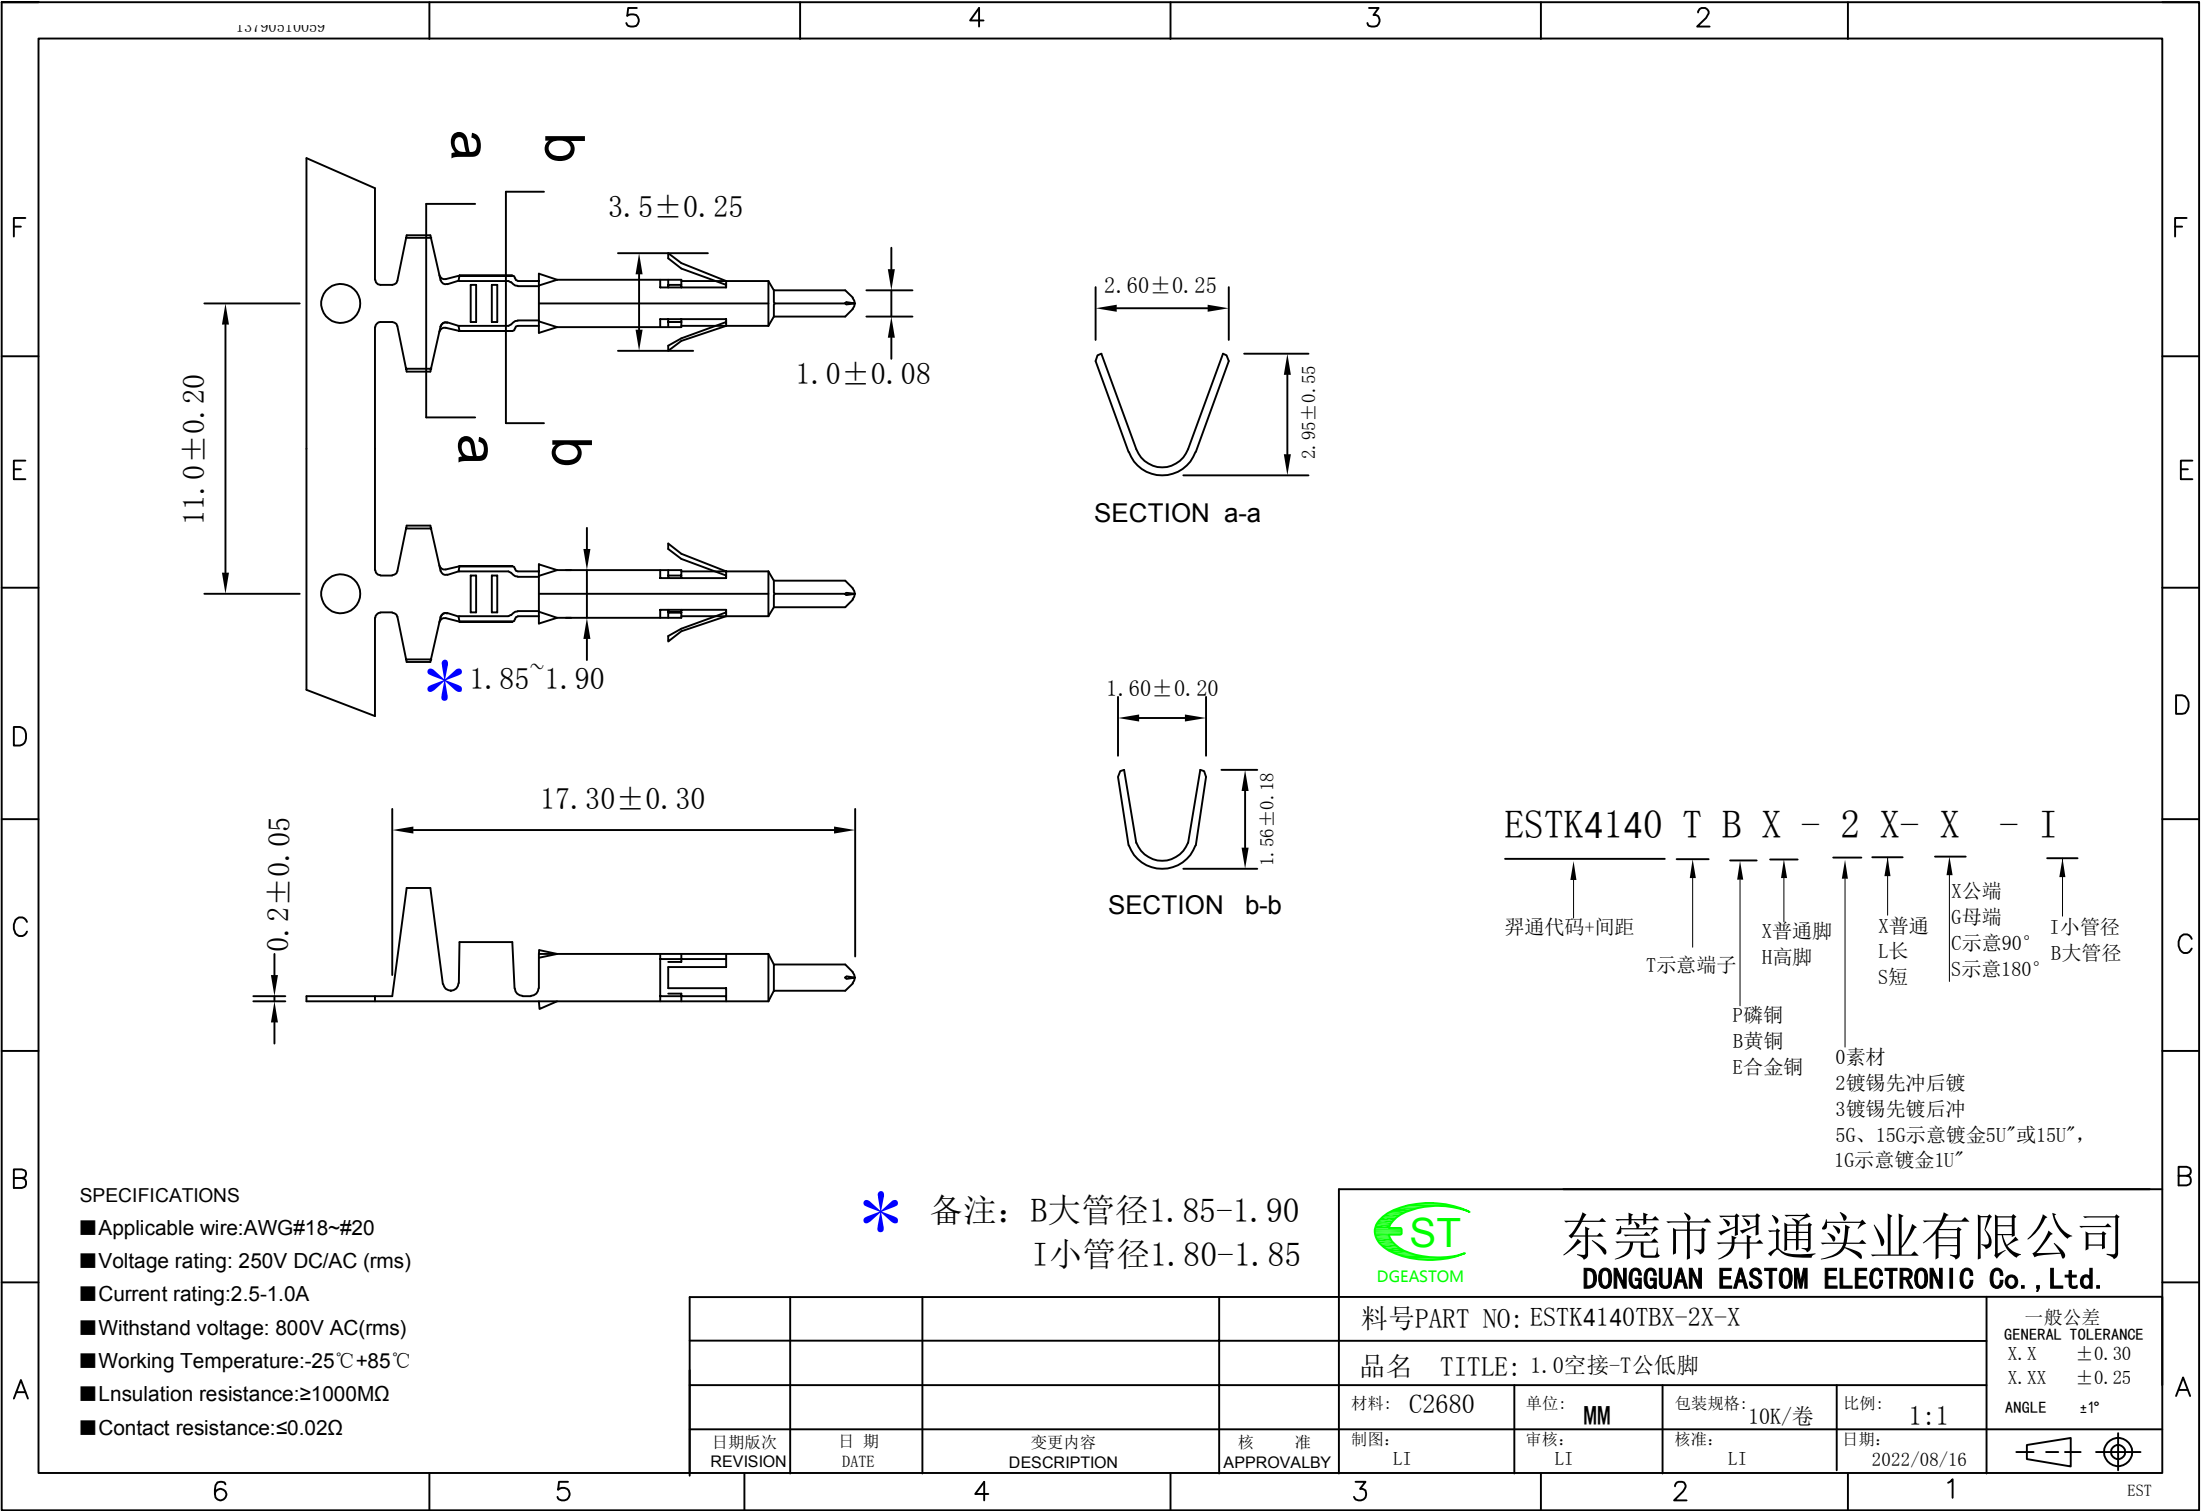

SPECIFICATIONS

- Applicable wire:AWG#18~#20
- Voltage rating: 250V DC/AC (rms)
- Current rating:2.5-1.0A
- Withstand voltage: 800V AC(rms)
- Working Temperature:-25℃+85℃
- Lnsulation resistance:≥1000MΩ
- Contact resistance:≤0.02Ω

* 备注: B大管径1.85-1.90
I小管径1.80-1.85

ESTK4140 T B X - 2 X - X - I

↑ ↑ ↑ ↑ ↑ ↑ ↑

羿通代码+间距 T示意端子 X普通脚 H高脚 X普通 L长 S短 X公端 G母端 C示意90° I小管径 B大管径

P磷铜
B黄铜
E合金铜

0素材
2镀锡先冲后镀
3镀锡先镀后冲
5G、15G示意镀金5U"或15U",
1G示意镀金1U"

				料号PART NO: ESTK4140TBX-2X-X	一般公差 GENERAL TOLERANCE X. X ±0.30 X. XX ±0.25 ANGLE ±1°	
				品名 TITLE: 1.0空接-T公低脚		
				材料: C2680	单位: MM	包装规格: 10K/卷
				制图: LI	审核: LI	比例: 1:1
日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY	日期: 2022/08/16	核准: LI	



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

