

13790510059

5

4

3

2

1

F

F

E

E

D

D

C



C

B


B

A



A

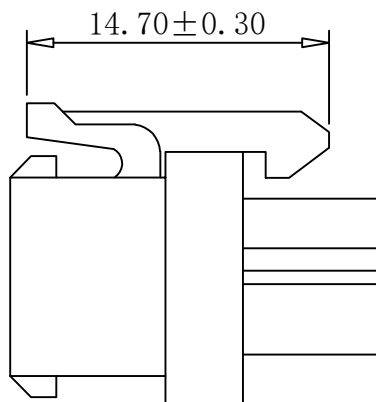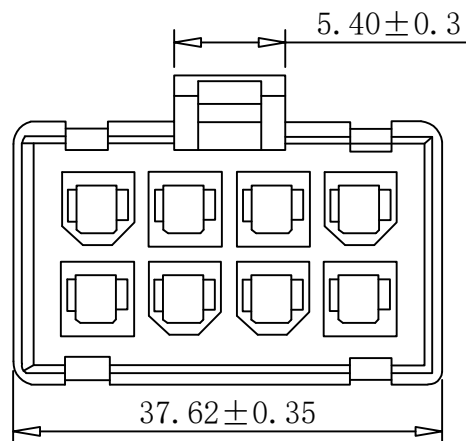


硅胶垫

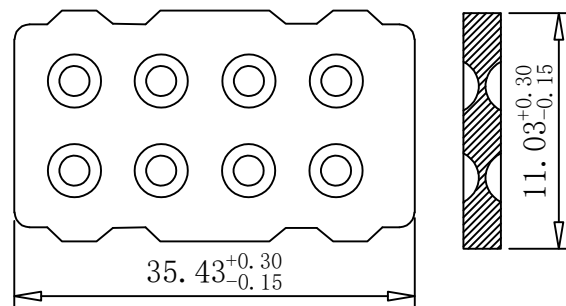


防水圈

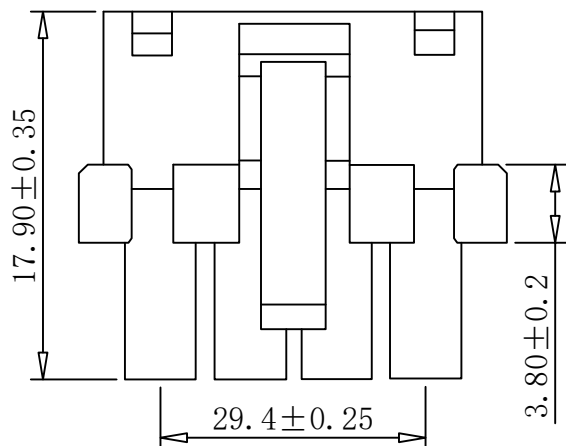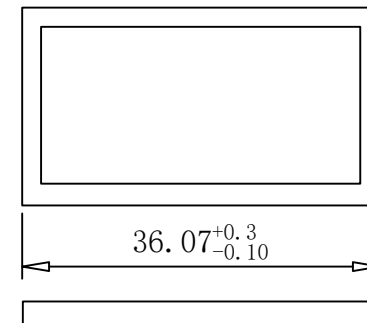

防水公胶壳

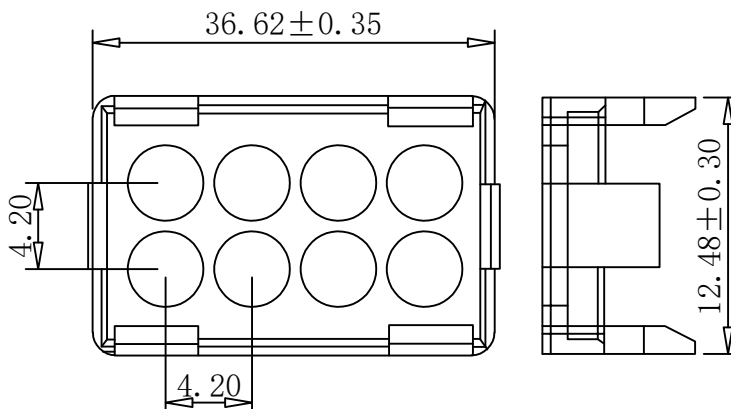

防水盖

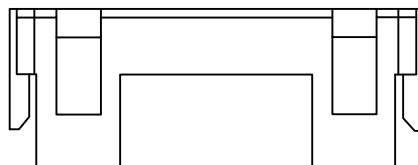

EST4206 H - 2*8P X - B - X

↑ ↑ ↑ ↑ ↑ ↑

羿通代码+间距 PIN数 X本色 X公胶壳
B黑色 B带扣 G母胶壳
R红色 C刺破
L蓝色 2L示意两侧带锁扣
Y黄色 U超薄F防呆型
G绿色 HV带高凸点
C透明 LC带低凸点,
K卡槽
E有耳
NE无耳

H示意胶壳,
H后无数字默认材质V0
H后带数字2示意材质V2

SPECIFICATIONS

- Voltage rating: 300V AC/DC;
- Current rating: 9A AC/DC;
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 30mΩ Max
- Wire size: /



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST4206H-2*8PX-B-X

品名 TITLE: MX4.2-H公防水(双)

材料:

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2022.04.21

版次
REVISION日期
DATE变更内容
DESCRIPTION核准
APPROVALBY

一般公差
GENERAL TOLERANCE
X.X ±0.30
X.XX ±0.20
ANGLE ±1°



WLD