


Poles	Dimensions mm	
	A	B
1*2P	4.5	9.9
1*3P	9.0	14.4
1*4P	13.5	18.9

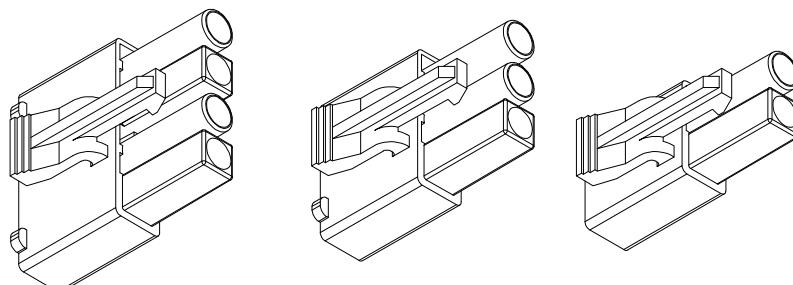

## Main Specifications

1. Poles: 1\*2 to 1\*4P
2. Current rating: 10A AC, DC
3. Voltage rating: 300V AC, DC
4. Temperature range: -25°C to +85°C
5. Contact resistance: ≤20mΩ
6. Insulation resistance: ≥1000MΩ
7. Withstand voltage: 1500V AC/minute
8. Applicable wire: AWG #26 to #18

EST4501 H - 1\*NP X - B - X - HF-NK - X

辨通代码+间距

X本色  
B黑色  
R红色  
L蓝色  
Y黄色  
G绿色  
C透明

X公胶壳  
G母胶壳

X普通  
B带扣  
C刺破  
L示意LOCK TYPE  
U超薄防呆型  
HV带高凸点  
LC带低凸点  
K卡槽  
E有耳

NO MARK

A灼热丝750  
B灼热丝850  
X普通料

HF示意无卤  
NP普通含卤

PIN数  
1示意单排  
2示意双排

H示意胶壳,  
H后无数字默认材质V0  
H后带数字2示意材质V2



东莞市羿通实业有限公司  
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST4501H-1\*NPB-B-X

一般公差  
GENERAL TOLERANCE  
X.X ±0.35  
X.XX ±0.20  
ANGLE ±1°

品名 TITLE: EL4.5-H公(带扣)

材料: PA66(UL94V-2/V-0) 单位: MM 包装规格: 比例: 1:1  
日期: 2022.9.3

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 淮 APPROVALBY	制图: 审核: 核准: 日期: YL	审核: 核准: 日期: 2022.9.3 YL
6	5	4	3	2	1