

13790510059


5

4


3

2

1

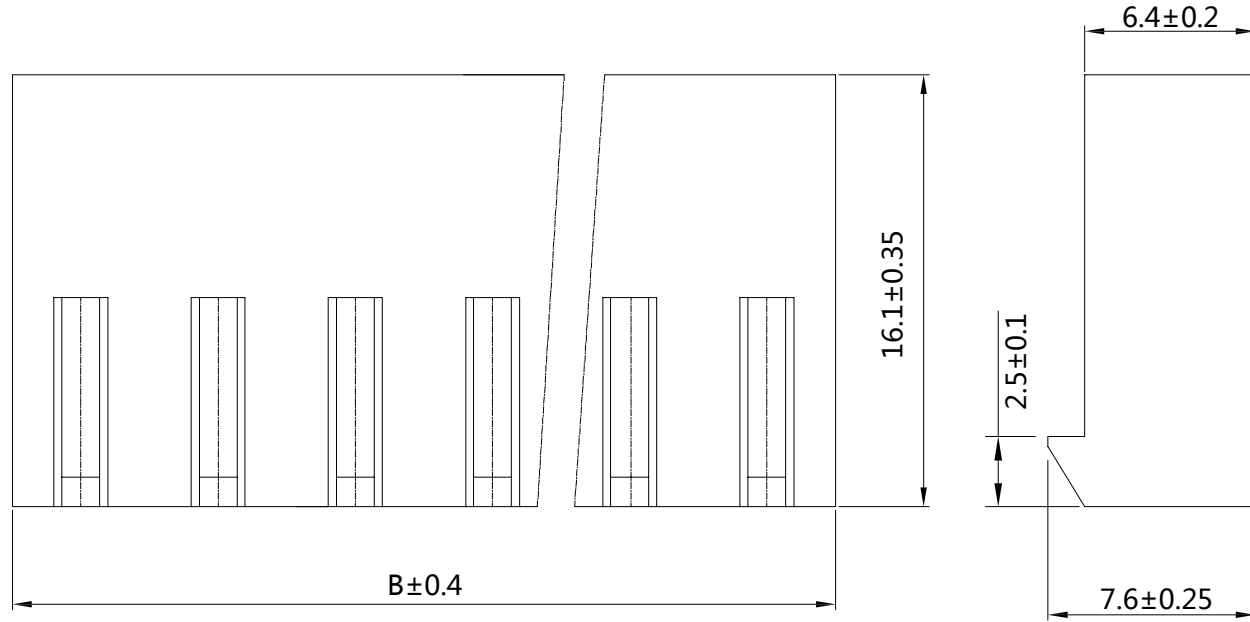

POLES	DIMENSIONS(mm)	
	A	B
2	5.08	10.16
3	10.16	15.24
4	15.24	20.32
5	20.32	25.40
6	25.40	30.48
7	30.48	35.56
8	35.56	40.64
9	40.64	45.72
10	45.72	50.80
11	50.80	55.88
12	55.88	60.96

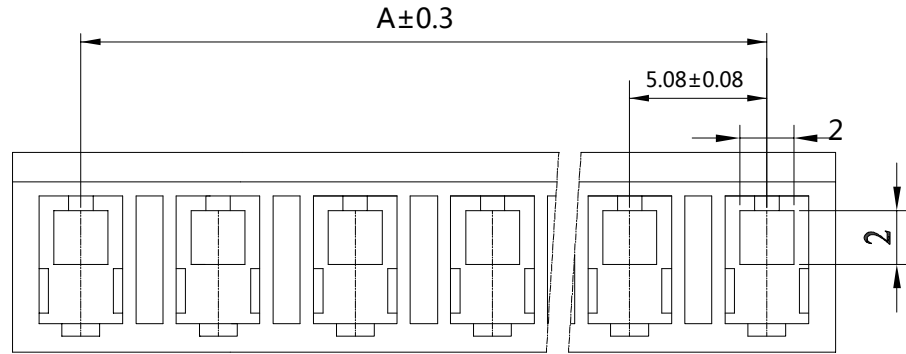

EST5080 H - 1*NP X - B - X - HF-NK - X

↑ 羿通代码+间距

↑ H 示胶壳, H后无数字默认材质V0, H后带数字2示意材质V2

↑ 1*NP PIN数, 1示意单排, 2示意双排

↑ X 公胶壳, G母胶壳

↑ X 普通, B带扣, C刺破, 2L示意两侧带锁扣, U超薄F防呆型, HV带高凸点, LC带低凸点, K卡槽, E有耳

↑ NO MARK

↑ A灼热丝750, B灼热丝850, X普通料

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 5A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max
- Applicable Wire: AWG#18~#24
- Material: PA66 UL94-V0
- Pitch: 5.08mm

日期版次 REVISION	日期 DATE	变更内容 DESCRIPTION	核 准 APPROVALBY



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST5080H-1*NPX-B-X

品名 TITLE: 5.08-H公

材料:

单位: MM

包装规格:

比例: 1:1


制图:

审核:

核准:

日期: 2022. 9. 12

一般公差
GENERAL TOLERANCE
X. X ±0.25
X. XX ±0.20
ANGLE ±1°



JD