

13790510059



5

4


3

2

1

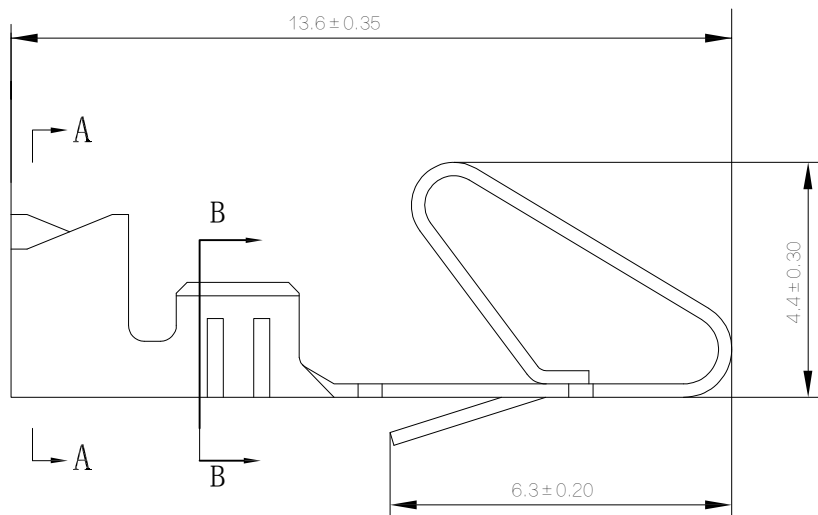

SECTION A--A



SECTION B--B

EST5080 T P X - 2 X- X

↑ 邦通代码+间距
↑ T示意端子
↑ P磷铜
↑ B黄铜
↑ E合金铜
↑ X普通脚
↑ H高脚
↑ E增高型脚
↑ 0素材
↑ 2镀锡先冲后镀
↑ 3镀锡先镀后冲
↑ 4镀全镍(镀后冲)
↑ 4.2镀全镍先冲后镀
↑ 5G、15G示意镀金5U"或15U", 1G示意镀金1U"

↑ X公端
↑ G母端
↑ C示意90°
↑ S示意180°
↑ X普通
↑ L长
↑ S短
↑ U超薄

SPECIFICATIONS

- Voltage rating: 250V AC/DC;
- Current rating: 5A AC/DC;
- Withstanding Voltage: 1500V AC/minute
- Insulation resistance: 1000MΩ Min
- Temperature range: -25℃~+85℃
- Contact resistance: 20mΩ Max
- Pitch: 5.08mm
- Material: C5191



东莞市羿通实业有限公司
DONGGUAN EASTOM ELECTRONIC Co., Ltd.

料号PART NO: EST5080TPX-2X-G

品名 TITLE: 5.08-T母

材料: C5191

单位: MM

包装规格:

比例: 1:1

制图:

审核:

核准:

日期: 2022. 9. 11

一般公差
GENERAL TOLERANCE
X. X ±0.30
X. XX ±0.25
ANGLE ±1°



JD